


Motors

saia

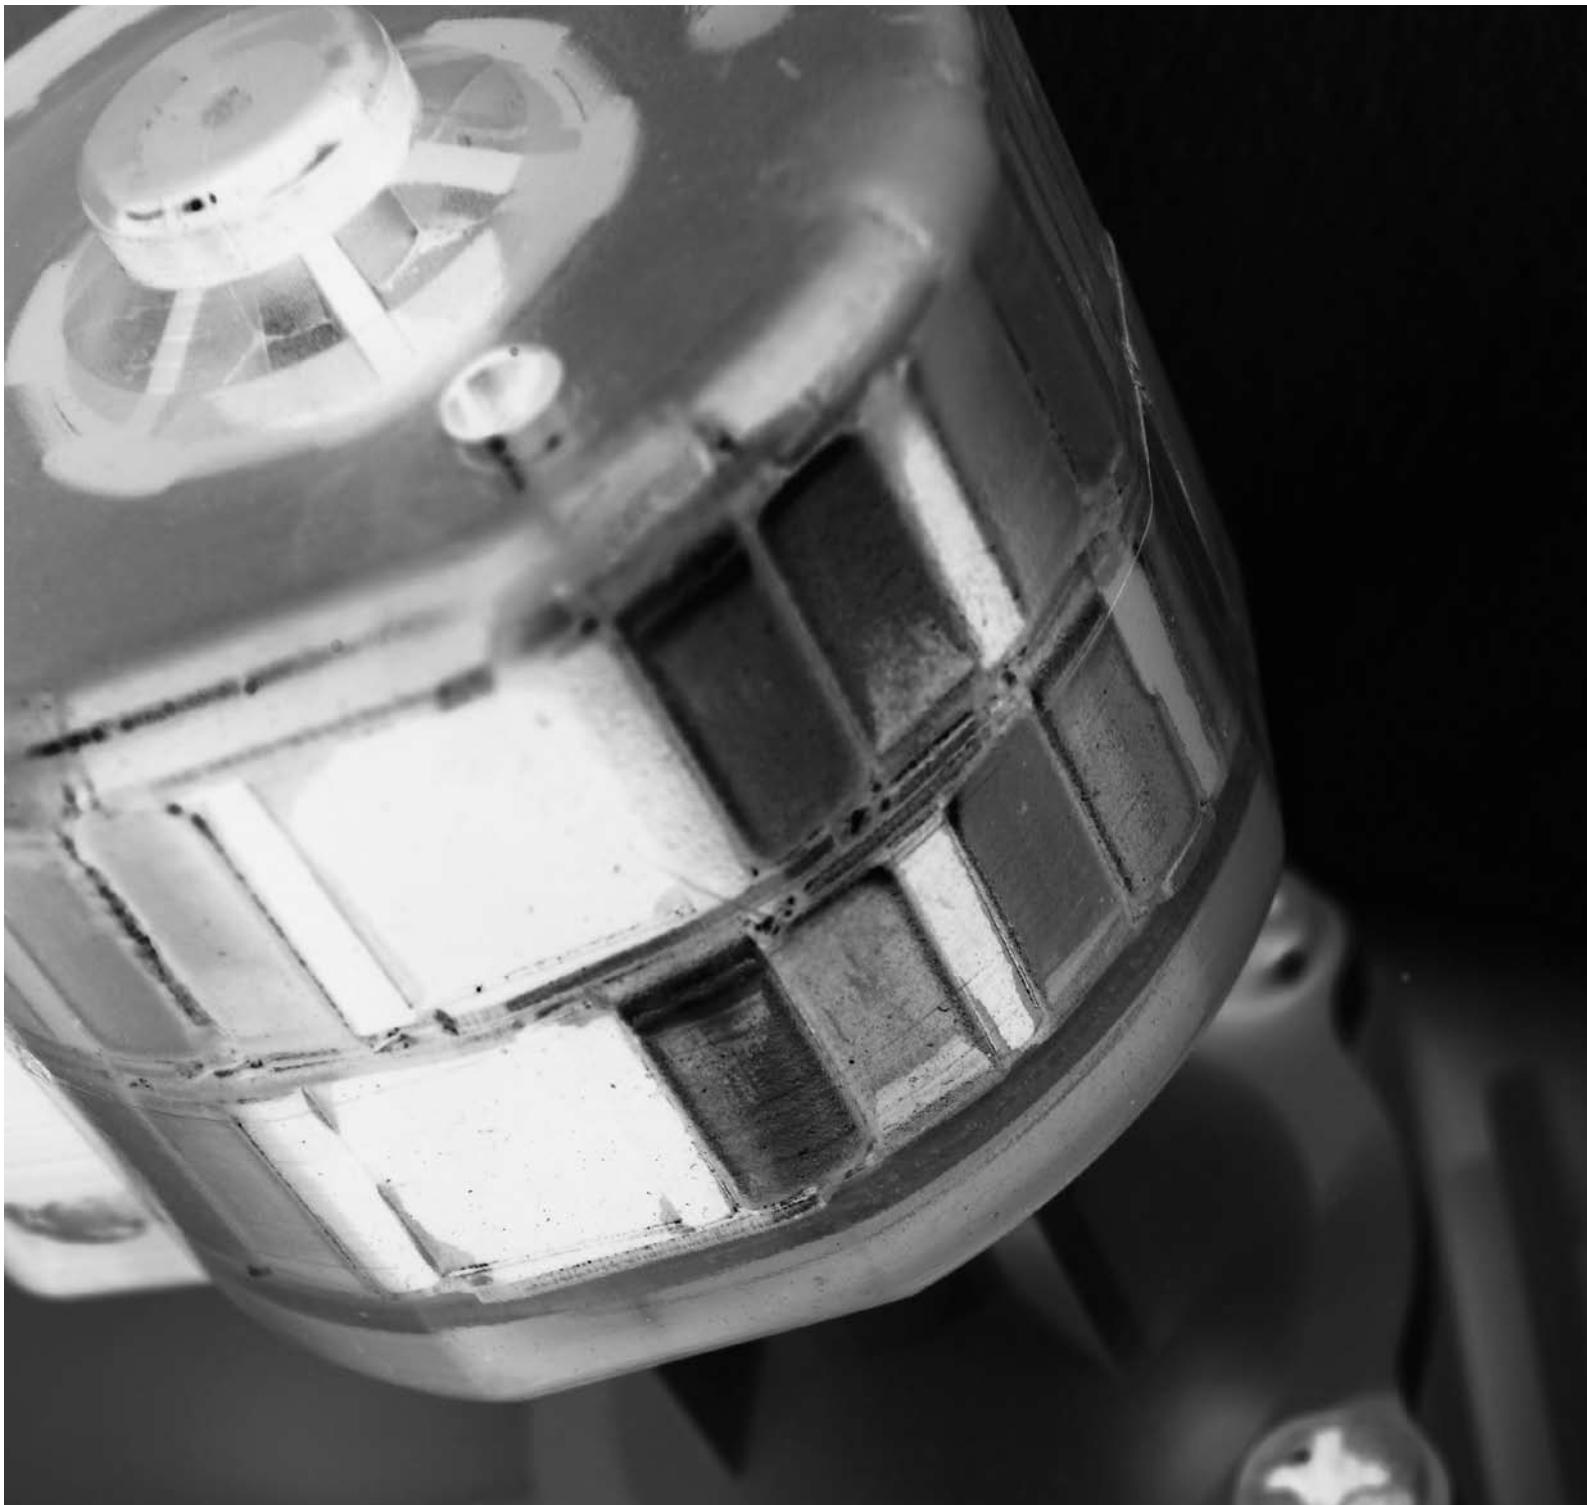

 JOHNSON
ELECTRIC

innovating motion

The data used in this Product Overview may be used as a guideline only.
Specific operational characteristics of our products may vary according to
individual applications. It is strongly recommended that specific operating
conditions are clarified with Johnson Electric before application.

Johnson Electric Terms and Conditions of Sale apply.

All data may be subject to change without notice.

Table of Contents

Johnson Electric Group	2	
Group		
Looking for a specialized motor solution	4	
Table of typical applications & Saia motor types	9	
Saia Motors important notes	10	
Synchronous Motors	28	
Rotational	URT, UAT1, UAT3, UCM, UCR, UBR1, UBR2, UDR UDS, UO (SM5021/SM5022), UFM, UFR, UHM, UP (SM6443/SM6444)	29
Rotational, Torque limited	UNU0 (SM3532RG), UOU0 (SM5032RG), UPU0 (SM6469RG)	48
Stepper Motors	69	
Rotational	URG, UAG1, UAG3/4, UCD, UCB, UBD, UBB UDB, UO (ST5021/ST5022), UFB, UFD, UHD, UP (ST6443/ST6444)	78
Gearboxes	102	
UGA, UGD, UGM, UGB, UGF, UGV	124	
UGO/UGP (STG60/STG61), AP60, UGJ, UGR (STG200)	141	
Synchronous Motors	123	
Linear	UCC, UCK, UBK, UO Linear actuator (LA5021SM) UO Spindle actuator (SP5021SM)	152
Stepper Motors	153	
Linear	UCE, UCL, UBL, UO Linear actuator (LA5021ST) UO Spindle actuator (SP5022ST), Connector Types	167
Driver Boards	SAMOTRONIC101, SAMOTRONIC102, Evaluation-Kit 2	168
Electronics for Stepper Motors	182	
Cam Programmers	185	
KKP, KKC, KKD0, KKD4, KKD1, KKD7, KKD2, KKD3, KKD6	186	
Hand settable timer	207	
KKH	208	
Cam Programmers	214	
Accessories		

The Johnson Electric Group is one of the world's largest providers of motion actuators for automotive and industrial applications

Over the years, we have shipped billions of motors to more than thirty countries in over one hundred different motor applications. Johnson Electric has an annual production capacity of one billion motors.

At the heart of Johnson Electric's success is our commitment to make our customers successful. Our customers include many of the world's leading industrial, consumer and automotive companies. We begin by understanding our customers' business needs, and the product application requirements of the end user of our customers' products. Then we design and deliver innovative motion solutions that help our customers to differentiate their products in the marketplace. Our goal is to be instrumental in the successful launch of our customers' products in their respective marketplaces.

Our Brand Promise

Johnson Electric is the most reliable partner

Johnson Electric is responsive and flexible; and has the financial stability and organizational integrity

to meet all of our commitments and to support our customers' success. Product reliability and assurance of supply are our commitment.


Johnson Electric delivers competitive advantage

Johnson Electric delivers differentiation and innovation through its motion products – subsystems comprising of Stepper Motors, DC Motors, AC Motors, Piezo-electric Motors, Switches, Solenoids, Flexi Circuits, Motion Control, Precision Plastics and Precision Gears.

Our business growth hinges with leading "branded" goods producers to deliver differentiation and innovation through our motion products. The core platform for delivering these solutions is a highly developed production base and focused customer support teams throughout the world. This combines scale advantages in production and procurement with skilled and dedicated motion application experts.



Johnson Electric Holdings Limited is the parent company of the Johnson Electric Group and has been listed on the Stock Exchange of Hong Kong since 1984. The Group structure consists of a number of operating divisions and business units focused on their particular customer application or product segment

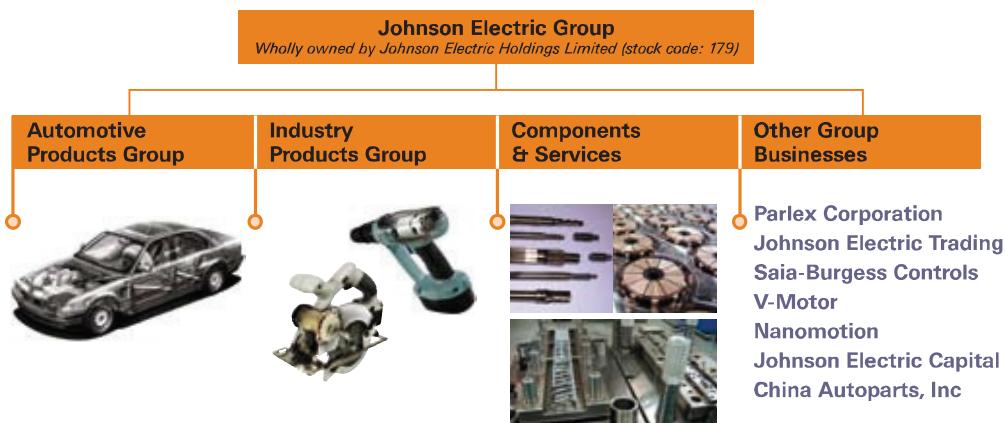

The Group's motion systems, motors and switches businesses are managed through two primary operating divisions: Automotive Products Group and Industry Products Group.

The Automotive Products Group, which consists of Johnson Electric's Automotive Motors Group and the Automotive Division of Saia-Burgess Electronics, is focused on providing customized motion solutions for major automotive application segments that include powertrain, body and chassis.

The Industry Products Group is comprised of business units that provide motion products and solutions for various commercial and industrial application sectors, including home appliances, power tools, business equipment, personal care products, medical equipment and healthcare, building automation and security, audio-visual and other industrial products.

Supporting these two operating divisions is the Group's Components & Services function which produces metal and plastic parts, tooling and production equipment for motor and motion related products. Johnson Electric is a highly vertically integrated business that manufactures an exceptionally wide range of components that form the basis for its final assembled end products. We make magnets, bearings, shafts, housings, laminations, commutators and die cast parts. We also build tools, assembly fixtures, plastic molds as well as armature winding and other production machines.

In addition to motion systems and motors, the Group also consists of a number of complementary manufacturing businesses and other subsidiary companies. These include an innovative provider of flexible printed circuits and interconnect solutions; a successful niche player in the programmable controls industry; and a rapidly growing specialty metals and trading services company.

Looking for a specialized motor solution?

Look no further.

We offer the industry's most comprehensive combination of technology, engineering and manufacturing to satisfy all your actuation design needs. From stand-alone motor products to complete value-added solutions; we can do it all for you. The images shown are just a few samples that demonstrate our design and value-added assembly capabilities.

If your application requires more than a standard product solution, please consider us early in your design process. Our application engineering staff will be happy to discuss your requirements.



Saia – a leading global motor brand

We offer the best design resources for actuating solutions – whether it's one motor delivered tomorrow morning or a half million delivered just-in-time over the next year.

Machine and process automation can range the most basic on-off function to extremely complex sequencing. When the process involves linear or rotary motion, motors are among the best actuation devices in terms of size, cost, simplified installation, and ease of use.

On this page are some of the primary functions which are ideally suited for Saia motors, followed by several pages of current application examples of our products applied in a wide variety of industries. If your design includes linear or rotary operations, we can help you determine the best product to meet your application design requirements.

Variable Positioning

Stepper motor for linear applications and rotary applications provide variable positioning capabilities.

Uncompromising Reliability


Saia motors provide repeatable, predictable performance.

Common Rotary Motor Applications

- Counters
- Circuit breakers
- Rotary valves
- Rotating lamps
- Textile machinery
- Flaps
- Level indicators
- Ticket machines
- Copiers

Common Linear Motor Applications

- Coffee machines
- Textile machinery
- Linear valves
- Vending machines

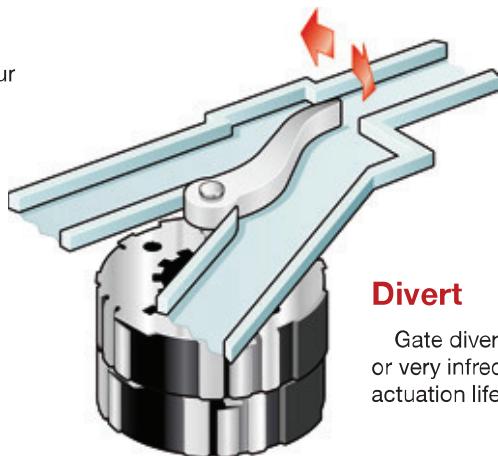

Divert

Gate diverters, depending on the application, can be used continuously or very infrequently. In this example, a stepper motor unit is chosen for its actuation life rating.


Pinch

In this example, a linear motor is utilized for its variable positioning capability to smoothly pinch the tube to the operator's precise demand.



Position

Positioning applications can range from a simple ratcheting device, such as this, to precise variable positioning using linear or rotary motor.

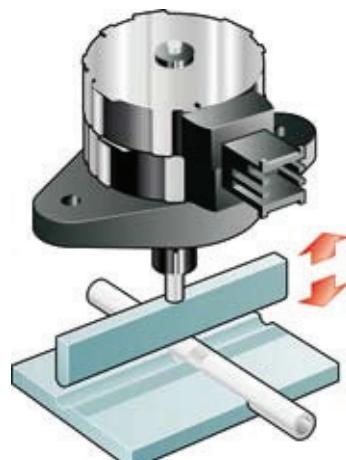

Motors for Pharmaceutical and Medical Equipment

Saia motors are ideally designed for precise, clean, quiet, reliable automation of a variety of medical equipment functions.

Inherent features which optimize linear and rotary motor use in the medical industry include:

- Easy control with simple electronics
- Instant actuation or smooth variable positioning
- High MTBF, reliable, repeatable operation without degradation due to wear
- Long, predictable life (10^6 cycles)
- Ideal for both open loop or closed loop microprocessor controlled systems

Pharmaceutical Dispenser

- Locks storage trays closed
- Locks individual medicine compartments
- Counts tablets as dispensed

IV Fluid Metering

- Acting as pinch valves, motor offer a simple, direct, reliable means to start and stop fluid flow through valves or tubing
- Principle motor design advantages include non-contacting, quiet operation with minimal heat generation
- Also, depending on the design requirements of the application, either immediate on/off or slow, proportional actuation can be achieved

Intraocular Microsurgery

- Motors are used to control fluid flow through a series of tubes during intra-ocular surgery
- Reliability is a primary motor advantage because a malfunction during surgery could be detrimental

Surgical Laser

- Motors are commonly used as the shutter mechanism for surgical lasers.

Portable, Real-Time Blood Analyzer

- A bedside blood analyzer allows blood to be monitored during administration of medicines allowing doctors to prescribe medications in more exacting dosages based on the patient's condition

Motors as Locking Mechanism

Motors are found in numerous applications that require a locking device. Whether it is a medical application, an office automation application or a door lock, motors provide an effective, cost-efficient locking mechanism.

Security Applications

- Hotel room door lock
- Hotel safe lock
- Prison door lock
- Fire safety door opening lock

Office Automation

- Disk drive door lock
- Personal computer chassis lock
- Docking station lock
- Locks to hold peripherals in place
- Tape library index lock

Medical

- Sterilizer lock
- Centrifuge lock
- Blood analysis machine lock

Consumer

- Oven door lock for self-cleaning function
- Garage door safety lock
- Home safe lock

Industrial

- Overhead door lock
- Fire safety door lock
- Prison locks
- Commercial laundry locks



Motors in the Appliance Industry

Motors are found in numerous applications in the appliance industry. AC and DC products are available for on/off operation on many types of consumer and commercial appliances.

Domestic Appliances

- Through the door refrigerator ice and water dispensers
- Door locks on self-cleaning ovens
- Gas valve control on gas ranges and ovens
- Drain control valves on domestic washing machines
- Brake motors on domestic washing machines



Commercial Appliances

- Dispensing valves
- Beverage dispensing valves
- Product dispensers on vending machines
- Coin changers on vending machines
- Actuating devices on commercial baking and food processing or packaging equipment
- Wrapping material cutters for food packaging
- Gas valve control on gas fired boilers and furnaces
- Industrial overhead door brake mechanisms

Typical applications for cam programmers and manual timers

Automation in the **food industry**

Installation cleaning and systematic sterilization processes
Aids to automation for traditional bakeries, confectioners, regional speciality food producers, cheese makers, wineries, etc.



Automation in **industrial manufacturing**

Construction of machines and apparatus
Automated manufacturing equipment
Electroplating
Packaging
Trial installations, test benches

Automation in **domestic appliances**

Refrigeration technology, refrigerator defrosting, ice-cube making machines
Air conditioning installations
Regulation of heating technology, cascade switching of electric loads
Industrial and hospital washing machines
Swimming pool driving unit



Automation in **service industries**

Water supply, drinking water treatment, waste water purification
Bell-tower chimes, alarm sirens.

Miscellaneous automation

Office machines
Fitness equipment
Apparatus for leisure activities, oven for enamelware or pottery
Advertising devices
Impulse generator



Table of typical applications & Cam Programmer Series

In addition to the products shown in the Product Catalog pages, the Product Mapping table below shows a wide range of cam programmer types for a selection of applications. Also, cam programmers may be customized to fulfill your specific requirements, please feel free to contact us.

Application Cam Programmer	KKP	KKC	KKD0	KKD2-01	KKD2-02	KKD1	KKD7	KKD2	KKD3	KKD6	KKD4	KKH - - 00	KKH - - 88	KKH - - -
Healthcare & Medical Equipment	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Personal Care				●	●	●								
toilet cabins				●	●	●								
hand dryers	●													
hair dryers	●											●	●	
solariums												●	●	
saunas	●	●										●	●	●
whirepool												●	●	●
swiming pool	●	●	●	●	●	●	●	●	●	●	●	●	●	●
fountain variables	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Building Automation & Security														
fog horn	●	●	●	●	●	●	●	●	●	●	●	●	●	●
bell towers	●	●	●	●	●	●	●	●	●	●	●	●	●	●
White Goods														
defrosting	●	●	●	●	●	●	●	●	●	●	●			
Ice cube machine	●													
Home Appliances														
coffee machine	●											●		●
Heating Ventilation & Air Conditioning														
heating ventilation	●	●	●	●	●	●	●	●	●	●	●	●	●	●
sanibroyeurs	●		●											
pottery ovens												●	●	
Industrial equipment & automation														
automation	●	●	●	●	●	●	●	●	●	●	●	●	●	●
galvano	●	●	●	●	●	●	●	●	●	●	●	●	●	●
test equipment	●	●	●	●	●	●	●	●	●	●	●	●	●	●
food specialities	●	●	●	●	●	●	●	●	●	●	●	●	●	●
botteling	●	●	●	●	●	●	●	●	●	●	●	●	●	●
newspaper	●	●	●	●	●	●	●	●	●	●	●	●	●	●
milk truck cleannning	●	●	●	●	●	●	●	●	●	●	●	●	●	●
carwash			●	●	●	●	●	●	●	●	●	●	●	●
battery loader												●	●	●
milking equipment	●	●	●	●	●	●	●	●	●	●	●	●	●	●
drying	●	●										●	●	
Business Machines														
bookbinding	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Vending machines	●	●	●	●	●	●	●	●	●	●	●	●	●	●
feeding systems	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Page	186	188	190	192	193	194	196	198	200	202	204	208	210	212

Saia Motors Important notes

General

All specifications for torque, force and power are representative only and maybe subject to variation due to manufacturing tolerances.

Saia motors motors, except UR types, fulfil basis insulation requirements of EN 60335-1: 2004.

Application advice

The requirements for protection class I, II or III according to EN 60355-1: 2004 have to be fulfilled by customer application.

Stepper motors

Specified data for torque values is valid for

- a duty cycle of 100%, in Performance Charts additionally for 30% (cycle time: 5 min, type URG only 1 min.)
- an ambient temperature of $23 \pm 5^\circ\text{C}$
- a defined driver circuitry, with constant voltage supply
- at rated voltage

Depending from operational conditions, max. load torque must be lower than specified torque in catalogue. Please send us an enquiry.

If duty cycle or actual maximum ambient temperature is lower, the motor can be designed for higher performance (torque and power) by using a different winding.

Chopper driver circuits can be applied alternatively to a driver with constant voltage supply. They are more expensive, but bring higher performance. Additionally, they eliminate the effects of temperature and supply voltage change.

Performance charts available on request.

Step angle tolerance is about $\pm 5\%$
(not cumulative)

Synchronous motors

Specified data for torque/power values are valid for

- a duty cycle of 100%
- an ambient temperature of $23 \pm 5^\circ\text{C}$
- at rated voltage
- synchronous torque (not starting torque)

Torque is specified with maximum values, overloading is not permissible.

Depending from operational conditions, max. load torque must be lower than specified torque in catalogue. Please send us an enquiry.

If duty cycle or actual maximum ambient temperature is lower, the motor can be designed with higher performance by using a different winding.

The basic design is the same as for our stepper motors, but the motors are operated by a sinus waveform voltage.

A capacitor, connected to one of the motor coils, is necessary for rotation in the appropriate direction.

Motor type UDS is a special design: It has only one coil, but is fitted with an internal ratchet. This ratchet determines the direction of rotation. A capacitor is not necessary.

Mechanical and electrical connections

On request we can deliver other options, e. g.

- special motor shafts
- pinions on shaft
- special cable lengths
- connectors


Saia motors Gearboxes

Saia motors gearboxes are available in a variety of sizes to meet a wide range of torque requirements. Ratios from 4 1/6 to 6.048.000 are available. The basic design is a spur gearbox with gear wheels in metal, plastics and combinations of the two materials. A particular feature is the availability of freewheels and slipping clutches.


The gearboxes are turned by the motor, energy flow is from input to output shaft. That means, they are not allowed to be driven by the output shaft (for instance turning manually). This can lead to damage of some internal components!

Direction of rotation

As a function of the number of stages, the direction of rotation can be either clockwise or counter clockwise. The direction of rotation of motor gearbox units is generally specified by the gearbox output shaft (drive-side, see DIN EN60034-7, IEC 60050-411).



clockwise



counter clockwise


Ratio

A gearbox is characterised by its gear ratio i or its time T . Gear ratio i is the ratio of input speed n_e and output speed n_a . T is the time for one revolution of the output shaft.

Permissible force FA and FR at the output shaft

Permissible force loads at the output shaft are:

- Axial load F_A , pulling or pushing in axial direction of the shaft
- Radial load F_R acting laterally on the shaft. The catalogue value is referred to a distance of 1 cm to the bearing

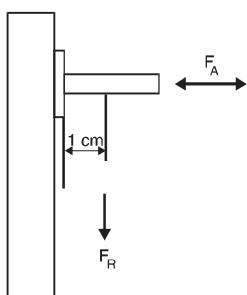

Permissible Torque

The lifetime of a gearbox is determined by the load on the gear teeth and the number of revolutions of the gear wheels.

The maximum permissible torque M_n is defined by the load on the final stage of the gearbox and the stability of the housing.

Some gearboxes have lifetime graphs. It shows the relationship between ratio i and the associated torque for a fixed period of time, e.g. 1000 or 10000 hours. A conditional parameter is the input speed (equivalent to motor speed) corresponding to the total number of revolutions of all gear wheels. In the catalogue we show therefore two curves – for a motor having 250/300 rpm and 500/600 rpm.


For example: Max. output torque M_{x1} is permissible at a ratio of i_{x1} . With smaller ratios the max. permissible torque has to be reduced, because otherwise the first stages of the gearbox would be overloaded.

Additionally to the lifetime curve the motor torque M_m , multiplied by gear ratio and reduced by the gear efficiency, is shown (resulting in output torque M_i).

$$i = \frac{n_e}{n_a} \quad T = \frac{i T 60}{n_e}$$

With n in rpm
 T in seconds

Saia motors Gearboxes

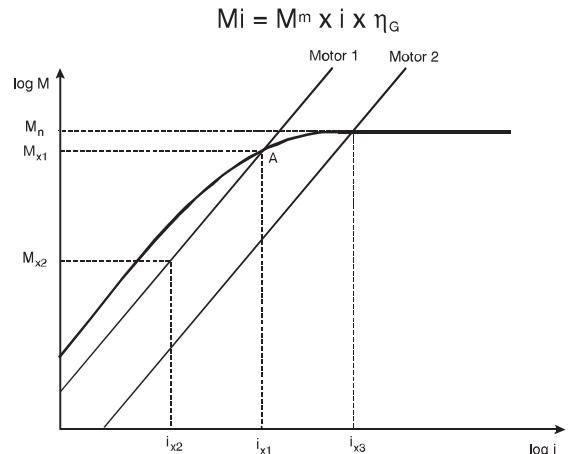

Example1: The application of motor 1 combined with a gearbox of ratio i_{x1} leads to an output torque M_{x1} at point A. The gearbox can transmit this torque, meeting its lifetime.

If a ratio of $i > i_{x1}$ is selected, actual torque would be $M > M_{x1}$. However lifetime cannot be guaranteed, as the operating point now lies above the lifetime curve.

Example 2: Motor 1 with a ratio of i_{x2} . Torque generated is M_{x2} . This is below of the lifetime curve. The transmission can operate for an extended period without difficulty.

Example3: Motor 2 and a ratio of i_{x3} give a torque of M_n . When using a ratio of $i > i_{x3}$ - the gearbox cannot be loaded more than M_n .

Efficiency


The efficiency is determined by the number of gearbox stages.

Efficiency of UGO/UGP and UGR is specified in catalogue

Efficiency

The number of stages in the gearbox determines the efficiency. With high ratios of i this factor will decrease below 10%, as the graph below shows. (For UGO/UGP, UGR, see table in the chapter)

Efficiency

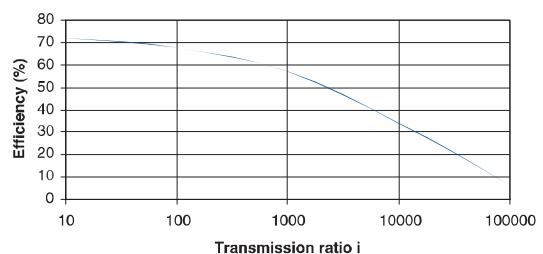

Saia motors Gearboxes Clutches

Gearbox types UGA, UGB and UGD can be fitted with freewheels or slipping clutches. Freewheels transmit the max. torque M_d in the locked direction, <1 cNm in the opposite direction. One way slipping clutches behave similarly except that the slip torque has a higher value. Two way slipping clutches can only transmit a limited torque value in either direction lower than the slip torque.

Slipping clutches are used to: Protect the gearbox against torque overloads, or to adjust the load by turning from the load side (remember: turning the output shaft directly can otherwise damage the gearbox).



Slipping clutch	One way	One way	Two way
Freewheel	yes	yes	no
Torque, clockwise	full torque	< slipping torque	< slipping torque
Torque, anti clockwise	< slipping torque	full torque	< slipping torque
Output shaft turning, clockwise	slipping possible	blocking	slipping possible
Output shaft turning, anti clockwise	blocking	slipping possible	slipping possible

Common Explanations of characteristics

Power consumption P_{in}

The power consumption expressed in W was determined in no-load operation

Load

The total sum of all static and dynamic torques (e.g. friction torque, mass inertia, acting on the rotor).

Speed n

rmp revolution per minute

Torque

The running torque in cNm (also synchronous, braking or dynamic torque) defines the load at which the synchronous motor falls out of synchronism and stalls.

Power output

The power output expressed in W is determined according to the following formula

$$P_{out} = \frac{M_d \times 2 \pi \times n}{60} = [W]$$

M_d in Nm (1 cNm = 0,01 Nm), n in rpm

Pole pair number

The number of rotor pole pairs North/South,

Direction of rotation

This information always refers to the output shaft, either of the motor or of the gearbox.

Right = clockwise rotation (CW),
Left = counterclockwise rotation (CCW)

Gear torque

The maximum gear torque in cNm defines the maximum load for a required life of at least 1000 operating hours.

Running time

This value refers to the time (t) per revolution (U); they are calculated using the following formula

$$t/U = \frac{i}{n} \times 60 = [\text{sec.}]$$

i = transmission ratio

n = motor speed

Axial thrust / lateral force / lateral torque

These values refer to the loads on the standard output shaft of the respective gear.

The permissible lateral torque referring to the standard shaft must not be exceeded on special shafts either.

General technical terms relating to the synchronous motor and torque limited synchronous motor

Synchronous

The running of the rotor at the same speed as the stator field which is determined by the frequency of the supply.

Synchronous speed

Constant speed of rotation at constant frequency based upon the number of pole pairs of the motor

$$n = \frac{f \times 60}{p}$$

f = frequency (Hz), n = speed (rpm)

p = number of pole pairs

Synchronous torque

Torque which the motor is still capable of producing without falling out of synchronism, once the synchronous speed of rotation has been reached.

Starting torque

Load torque the motor is capable to start.

It is influenced by the type and manner of coupling to the load, the load inertia, the gearbox design and the supply voltage. In the case of a very large reduction ratio a small external moment of inertia and nominal gearbox play the starting torque becomes equal to the synchronous torque.

Detent torque (static)

Defines the maximum torque which can be applied to a deenergised motor without causing the motor to rotate. Catalogue specifications refer to the static detent torque.

Detent torque (dynamic)

Defines the maximum torque at which the motor comes to an immediate standstill from synchronous running when the excitation current is switched off.

Permissible load inertia

Is the maximum inertia load the motor can start without external help.

Stall-proof

Synchronous motors with permanent magnet rotors can be stalled without damage to the motor winding.

Torque limit (Torque limited motors)

The constant torque produced by the hysteresis-magnetic clutch within the torque limited synchronous motor in the stalled condition.

Design characteristics

The basic design is the same as for our stepper motors, but the motors are operated by a sinus waveform voltage.

General technical terms relating to the stepper motor

ED or Duty Cycle

Duty cycle of operation, based on a cycle time of 5 minutes (1 minute for URG) and a frequency f=0Hz; e.g. ED=30% means that the motor can be continuously powered 1.5 minutes (30% of 5 minutes) without overheating

Step

Rotary movement of the rotor through one step angle.

Step angle

Rotary angle through which the motor shaft turns per controlled pulse.

Stepping frequency

Number of steps of the stepping motor in 1 sec.

Driver

Electronics which convert step and direction input signals to high power currents and voltages to drive a step motor.

Unipolar driver

Unipolar means that every coil end has one polarity only. A unipolar coil consists in fact of 2 coils. Alternating the current flows through one of these coils and in one direction. Compared to a bipolar motor only half of the copper is used at time.

The motor phase winding must be center tapped. On the SAMOTRONIC101 this is already fixed on the board.

Often an additional Zener diode is used to ensure a fast current decay in the switched-off coil. This will give an increased motor torque especially at higher frequencies.

Torque graphs in this catalogue are measured with a 10V Zener diode.

Bipolar Driver

Bipolar indicates that every coil end is bipolar, during driving it will be „+“ as well as „-“. Since every coil is fully used the motor has a higher torque compared to a unipolar one.

Very often a bipolar driver has a constant current drive capability (also called chopper). That will give an increased torque output on higher frequencies and a lower influence of temperature and supply voltage variations. Typical applications use the SAMOTRONIC102.

Rotational speed

Revolutions of the motor per minute calculated from:

$$n = f \times \frac{\alpha \times 60}{360^\circ}$$

f = stepping frequency, α = step angle.

Detent torque (static)

Defines the maximum torque which can be applied to a deenergised motor without causing the motor to rotate. Catalogue specifications refer to the static detent torque.

Holding torque

Defines the maximum torque with which an energized motor can be loaded without giving rise to a continuous rotary movement.

Pull-in torque

Operation torque when switching on step frequency at once, without a ramp.

Pull-out torque

Operation torque when applying an acceleration / deceleration ramp.

Load inertia moment

The sum of all the mass inertia moments occurring on the shaft of the stepping motor.

Steps/rev

The number of steps per 360° rotation.

Maximum operating torque

The maximum torque which a stepper motor without external mass inertia can generate without stepping losses.

Saia Cam Programmers Technical information

General

Among automation components, the cam programmer offers the simplest way of repeating a preset program as often as necessary.

Technology

A synchronous motor with reduction gear rotates, in a defined time, the axis on which cams have been programmed. Each cam activates a change-over microswitch, which turns on and off, at the required time, the various devices of a process.

Functions

The KKC, KKD and KKP are programmers that execute a defined program, either once only or repeating continuously, depending on how they are connected.

The KKH is a timer, to which a rotary knob has to be fitted that the user sets to the required time. When this time elapses, the switch will be tripped. The KKH can, however, also include a program with on/off switching for several timed devices.

Drive unit

The programmer's basic drive unit is a Saia UDS1 synchronous motor and Saia UGD reduction gear. For accuracy of timing and program execution, the time base is provided by the network frequency of 50Hz or 60Hz.

In certain special cases requiring higher torque or a different program duration, other combinations may be chosen out of Saia's wide motor/reduction range.

For example, the KKD2 and KKD3 devices are based on the Saia UDR1 reversing motor, and the KKD4 on Saia UFB1 stepper motor.

Program duration

The combination of Saia motors (mainly UDS) and reduction gears (generally UGD) covers all required durations between 1 second and 120 hours

The program can be set to its start position by means of a control knob.

Usually, one of the cams is reserved as the program end stop.

Number of channels and commutations

The KKC programmer comprises 1 or 2 cams, the KKP 1 to 4 cams, and the KKD up to 30 cams.


The KKH timer has 1, 2 or 3 cams.

Each channel has 1 change-over microswitch with 1 or more (to over 20) on/off operations during the course of the program.

Lower duration limits and number of channels

Each channel consumes 0.5 cNm of torque and each microswitch actuation takes 1.5 cNm.

For programs lasting less than 30s, see the following diagram regarding limits on the number of channels and simultaneous switch operations possible.

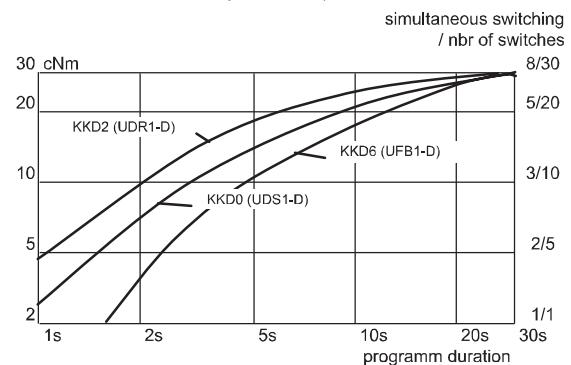

Microswitches with higher cutoff power will inevitably absorb more torque. That has also to be taken into account.


Program definition

The programmer comprises either adjustable cams or a specifically defined program.

Defined program

Specific programs are produced with milled cams, according a diagram supplied by the customer with all on/off switching sequences for each cam.


A specific program may also be produced in cam segments, programmed according to the customer diagram, but allowing later adjustment to meet local requirements.

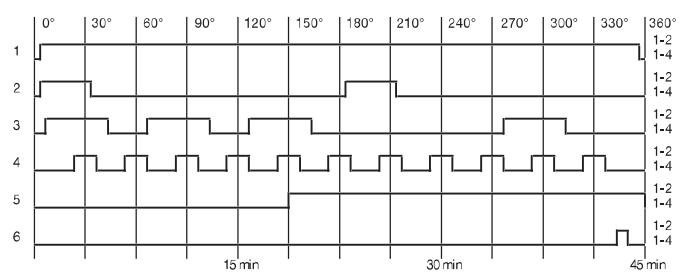


Adjustable cams

Cam Programmers to be adjusted by the integrator are equipped with segments cam or riders cams

Segments and riders are to be adjusted accordingly, meaning key and setting knob with graduated scale.



Key and Segment Cam and its adjusting Key



Ficher Cam and its adjusting Cam

On the KKD1 and KKD7 (which have 2 motors) and the KKD3 (which has a potentiometer), this setting knob is located inside.



Microswitch cutoff power

KKC, KKD and KKP programmers are equipped with XGC microswitches of 6(3)A/250V according to ENEC, and 10A250VAC according to UL.

KKH timers are equipped with XGG microswitches of 16(3)A/250V according to ENEC, and 15A250VAC according to UL.

On request, devices may be fitted with other, more powerful microswitches (up to 25A260VAC) if other parameters allow (program duration, number of simultaneous switch operations).

Custom models

If any required characteristics cannot be found in the « standard » versions offered, please feel free to contact your Saia agent. Possibilities too numerous to mention (other voltages, program durations, cutoff power, etc.) will in most cases allow production of a variant that meets the application's specific requirements.

Standards and approvals

All KKC, KKD and KKP programmers and KKH timers have been designed to meet prevailing European standards and are supported by a certificate of conformity.

Each of these devices is also available as a version « with UL and CSA approval » (specified in the order code)

Tolerances and precision of program


The sum of all cam deviations, milling, the transmission lever and microswitch comprise a switching point variation of +/- 1°, i.e. +/- 0.3%

Overall tolerance, comprising deviations inherent in each cam and to which are added deviations due to the distance between the first and last cam, microscopic differences between microswitches and the repetition of several program cycles, amounts to +/- 3.6°, i.e. +/- 1%


It is important to remember this tolerance when defining switch operations that are in very close proximity, especially if non-observance of a required sequence might create a problem.

In such cases, it is advisable to place interdependent channels side-by-side.

If necessary, ask for the channels concerned to be fitted with an adjustable lever, or choose the faster motors of the KKD1 or KKD7 for delicate sequences.



adjustable lever

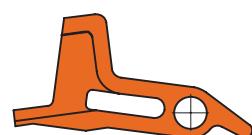


Standard lever


Simultaneous switching

Only the KKP may be fitted with a special lever that offers, under certain conditions, simultaneous switching of 2 or 3 channels. For the KKD, simultaneous switching is not mechanically possible. However, certain connecting strategies can be used to achieve electrically simultaneous switching.

The simultaneous switching of several program channels

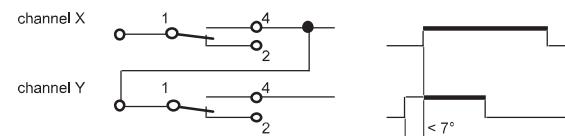

The chronological switching of several program channels

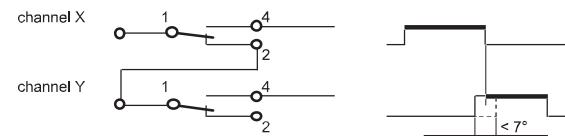

Mounting

The KKD has been designed for mounting onto 35mm DIN rail. However, like the KKC, it also has holes for screw mounting.

The KKP housing is fixed on any side meaning two screws. A bridle (order separately) allows a third fixing point.

The KKH timer is generally mounted behind the front panel meaning two screws 30 mm apart, located above and below the cam shaft. The choice of screw type (M3, M4 or self-tapping) is specified in the order code.

Connection


Microswitches and KKC and KKD motors are fitted with 6.3 x 0.8 mm connecting tabs for plug-in terminals for crimping or welding, while KKP and KKH motors have 150 mm wires fitted with female connectors size 6.3 x 0.8 mm

Only the KKD6 has screw terminals for connecting the stepper motor.

Lifetime

Motors are designed to run for at least 20 000 hours (>2 years continuously !)

With microswitches, it is necessary to differentiate between a mechanical lifetime of 2 million (KKH) to 50 million operations (KKC, KKD and KKP) and an electrical lifetime that depends on the current to be cut, according to the following diagram.

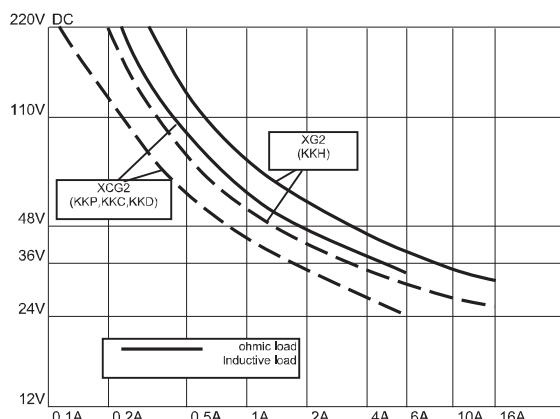

Temperature

Operating temperature -15°C to +50°C (-30° to +90° on request)

Protection class

Motors and microswitches belong to protection class IP40.

Since connections are not particularly protected, integrators will have to build the necessary electrical precautions into the application for the protection of the user.

Main advantages of Saia cam programmers

Direct control of loads up to 16A 250VAC.

As well for individual solution as for series production.

Modular system with almost no limits (up to 30 channels, several drive type, any program duration, cam type, choice of a microswitch with higher cutoff power).

The extreme flexibility of this modular system offers a practically « tailor-made » application.

Adjustable cams and system modularity offer the possibility of subsequent adaptations.


Exemplary reliability and remarkable functional security with the recognized high quality of Saia components (synchronous and stepper motors, reduction gears, microswitches) associated with proven materials.

Extremely simple mounting, fastening and wiring.


Easy service, accessible to everyone, thanks to straightforward electromechanical technology.

Switching examples

Running under control of a simple contact
stops at any position when S opens

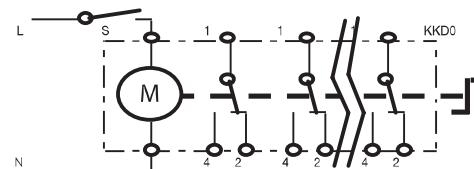


Program with a “zero position” defined on cam P1

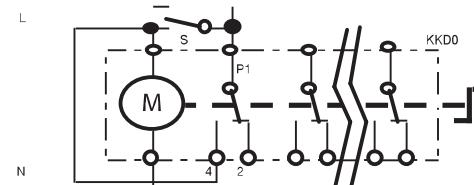

Forward and return to end positions (on KKD2)

The changeover of S, runs the program to its other end.

Two end positions defined on cams P1 and P2

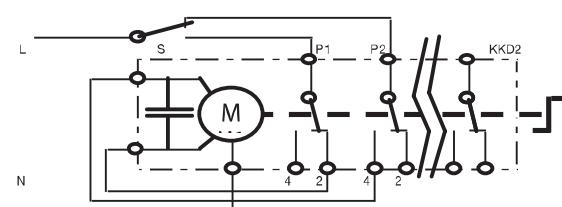

Further switching behaviour with help of a relay:

Starting by short pulse (KKD0)

Jump to start after voltage failure (KKD1)

Cyclic go and back between two ends (KKD2)

Synchronous Motors

Rotational



Type	URT	UAT1/UAT3	UCM/UCR	UBR1/UBR2	UDR
Dimensions (mm)	Ø 13 x 11	Ø 20 x 17	Ø 28 x 24	Ø 36 x 21	Ø 48 x 24
Characteristics	<ul style="list-style-type: none"> ■ smallest motor ■ optional planetary gearbox with diameter 13mm ■ pin connection or flex print 	<ul style="list-style-type: none"> ■ long life ■ precision bearing ■ standard 24VAC motor ■ economic volume solution 	<ul style="list-style-type: none"> ■ standard modules ■ customer specific interfaces 	<ul style="list-style-type: none"> ■ wide range of customised versions available ■ up to 230 VAC supply voltage 	<ul style="list-style-type: none"> ■ compact reversible synchronous motor
Voltage (V)	3–24	12–48/24	12–230	12–230	12–230
Speed 50 Hz (rpm)	600	600	250/500	250/500	500
60 Hz (rpm)	720	720	300/600	300/600	600
Pole number	10	10	24/12	24/12	12
Running torque (cNm)					
50 Hz	0,06	0,31/0,32	0,8–1,3	0,75–0,9	1,5
60 Hz	0,06	0,3/0,3	0,8–1,3	0,72–0,9	1,4
Power output (W)					
50 Hz	0,038	0,19/0,2	0,31–0,58	0,24–0,39	0,77
60 Hz	0,038	0,23/0,23	0,38–0,69	0,28–0,45	0,87
Gear combination	on request	on request	on request	A, D, M, B, F, V, J	A, D, M, B, F, V, J
Page	29	32/34	36/39	42/44	46

Rotational



Type	UDS	UO (SM5021/SM5022)	UFM/UFR	UHM	UP (SM6443/SM6444)
Dimensions (mm)	Ø 48 x 18,5	Ø 50 x 21	Ø 52 x 28 (56)	Ø 59 x 35 (70)	Ø 64 x 43
Characteristics	<ul style="list-style-type: none"> ■ simple to connect, only two wires ■ no capacitor ■ uni-directional with anti-return mechanism 	<ul style="list-style-type: none"> ■ three speeds versions ■ wide range of torque capacities 	<ul style="list-style-type: none"> ■ three-phase AC operation possible ■ for high power 2, 3 or 4 coils 	<ul style="list-style-type: none"> ■ powerful motor ■ synchronous version of the stepper motor UHD 	<ul style="list-style-type: none"> ■ most powerful package with STG/V gearboxes
Voltage (V)	6–230	6–230	12–230	12–230	12–230
Speed 50 Hz (rpm)	500	250/375/500	250/500	250	250/375
60 Hz (rpm)	600	300/450/600	300/600	300	300/450
Pole number	12	24/16/12	24/12	24	24/16
Running torque (cNm)					
50 Hz	0,9	2,0–7,5	2,8–5,3	8,5–15	10,3–35
60 Hz	0,8	1,8–7	2,6–4,7	6,6–9,5	8,5–30
Power output (W)					
50 Hz	0,5	0,65–2,75	1–2,8	2,2–3,9	3,5–13,8
60 Hz	0,5	0,78–3,0	1,1–3	2,1–3	3,9–14,2
Gear combination	A, D, M, B, F, V, J	VK4, O, P, R	A, D, M, B, F, V, J, O	J	O, P, R
Page	48	50	55/57	61	64

Synchronous Motors

Rotational, Torque Limited



Type	UNU0 (SM3532RG)	OUU0 (SM5032RG)	UPU0 (SM6469RG)
Dimensions (mm)	Ø 35 x 32	Ø 50 x 32	Ø 64 x 69
Characteristics	<ul style="list-style-type: none"> ■ torque limiting feature ■ abrasion-free, integrated low noise magnetic hysteresis clutch 		
Voltage (V)	24–230	24–230	24–230
Speed 50 Hz (rpm)	375	375	375
60 Hz (rpm)	450	450	450
Pole number	16	16	16
Torque Limited (cNm)			
50 Hz	0,6	2	7
60 Hz	0,6	2	7
Power output (W)			
50 Hz	0,25	0,8	2,75
60 Hz	0,3	0,95	3,3
Gear combination	O, P, R	O, P, R	P, R
Page	69	72	75

Stepper Motors

Rotational



Type	URG	UAG1/2	UAG3/4	UCD/UCB	UBD/UBB
Dimensions (mm)	$\varnothing 13 \times 11$	$\varnothing 20 \times 17$	$\varnothing 20 \times 17$	$\varnothing 28 \times 24$	$\varnothing 36 \times 21$
Characteristics	<ul style="list-style-type: none"> ■ high dynamic performance ■ optional planetary gearbox with motor diameter ■ pin connection or flex print 	<ul style="list-style-type: none"> ■ precision bearing standard motor 	<ul style="list-style-type: none"> ■ economic volume solution 	<ul style="list-style-type: none"> ■ standard modules ■ customer specific interfaces 	<ul style="list-style-type: none"> ■ wide range of customised versions available
Step angle(°)	18	18	18	7,5/15	7,5/15
Holding torque (cNm)	0,20	0,7/0,5	0,56/0,42	1,3–2,7	1,0–1,9
Detent torque (cNm)	0,03	0,14	> 0,06	0,26–0,42	0,22–0,36
Winding	bipolar	bipolar/unipolar	bipolar/unipolar	bipolar/unipolar	bipolar/unipolar
Gear combination	on request	on request	on request	on request	A, D, M, B, F, V
Page	79	82	86	88/92	96/99

Rotational



Type	UDB	UO (ST5021/ST5022)	UFD/UFB	UHD	UP (ST6443/ST6444)
Dimensions (mm)	$\varnothing 48 \times 24$	$\varnothing 50 \times 21$	$\varnothing 52 \times 28$ (56)	$\varnothing 59 \times 35$ (70)	$\varnothing 64 \times 43$
Characteristics	<ul style="list-style-type: none"> ■ compact reversible 15° stepper motor 	<ul style="list-style-type: none"> ■ three step angle motor ■ wide range of torque capabilities 	<ul style="list-style-type: none"> ■ two step angle motor 	<ul style="list-style-type: none"> ■ powerful standard motor ■ 7,5° stepper motor 	<ul style="list-style-type: none"> ■ most powerful package with STG/V gearboxes
Step angle(°)	15	7,5/11,25	7,5/15	7,5	7,5/11,25
Holding torque (cNm)	2,2–2,7	3,7–4	6,4–45,3	13–45,5	30–45
Detent torque (cNm)	0,35	0,25–1	0,45–0,8	1,3–5,3	2–7
Winding	bipolar/unipolar	bipolar	bipolar/unipolar	bipolar/unipolar	bipolar
Gear combination	A, D, M, B, F, V, J	VK4, O, P, R	A, D, M, B, F, V, J, O	J	O, P, R
Page	102	105	108/111	115	120

Gearboxes



Type	UGA/UGD	UGM	UGB/UGF
Dimensions (mm)	55 x 62/65,6	51 x 65,2	58 x 81
Characteristics	<ul style="list-style-type: none"> ■ established plastic gears ■ wide range of ratios ■ gears rotate on hardened steel shafts ■ optional integrated slipping clutches 	<ul style="list-style-type: none"> ■ volume metal and plastic spur gears ■ hardened steel shafts enclosed in plastic housing and metal plate 	<ul style="list-style-type: none"> ■ robust metal spur gears ■ plastic primary gears ■ die-cast aluminium housing
Height	12/13	15	17
Max. torque (cNm) ¹⁾	32	100	250/500
Ratios	A: 41/6...360.000 D: 41/6...6.048.000	1211/2...4800	B: 412/3...345.600 F: 41/6...5000
Internal slipping clutch	optional	–	optional (UGB)
Standard shaft (mm)	Ø 4 x 10	Ø 4 x 10	Ø 8 x 12
Page	124/127	130	133/136

¹⁾ max. value, for higher ratios



Type	UGV	UGO/UGP (STG60/STG61)	UGJ	UGR (STG200)
Dimensions (mm)	70 x 70	Ø 65/68 x 68	65 x 107	70 x 130
Characteristics	<ul style="list-style-type: none"> ■ solid metal spur gears ■ die-cast aluminium housing 	<ul style="list-style-type: none"> ■ high performance hardened steel spur gears ■ low teeth profile ■ optional interface plates for DC motors ■ option additional housing for IP 65 	<ul style="list-style-type: none"> ■ the most extensive gear ratio range ■ medium torque two plate gear type with metal spur gears 	<ul style="list-style-type: none"> ■ high performance metal gear type ■ robust aluminium twin plate design ■ can be used with DC motors
Height	17	29,8–382)	28	38
Max. torque (cNm) ¹⁾	500	600	1500	2000
Ratios	81/3...2.000	61/4...5400	41/6...36 Mill. ≥ 2500 with UGD	61/4...375
Internal slipping clutch	–	–	–	–
Standard shaft (mm)	Ø 8 x 12	Ø 8 x 22	Ø 12 x 20	Ø 12 x 35
Page	139	141	146	149

¹⁾ max. value, for higher ratios ²⁾ depends on ratio

Synchronous Motors

Linear



Type **UCC/UCK**

UBK

**UO
Linear actuator
(LA5021SM)**

**UO
Spindle actuator
(SP5021/5022SM)**

Dimensions (mm) $\varnothing 28 \times 31$

$\varnothing 36 \times 36$

$\varnothing 50 \times 76$

$\varnothing 50 \times 27$

Characteristics

- **new linear motor** using modules of the UC range
- integrated non-rotational thread spindle

■ **standard linear motor**
■ for extended travel the spindle has to be retained externally

■ linear actuator with 3 speeds
■ **50 mm travel**
■ integrated non-rotating threaded spindle

■ spindle type
■ threaded spindle has to be retained externally
■ for **extended travel**

Travel (mm) 10/13

8/13/56

45–50

68–130

Voltage (V) 12–230

12–230

12–230

12–230

Thread pitch (mm) 1,0

1,0

1,5/1,5/1,5

1,5/1,5/1,5

Speed (mm/s)

50 Hz 4,16/8,33
60 Hz 5/10

6,67/8,33
8/10

6,25/9,37/12,5
7,5/11,25/15

6,25/9,37/12,5
7,5/11,25/15

Pole number 24/12

12

24/16/12

24/16/12

Max Force (N) 35

35

45–50

45–70/50–70

Page 153/156

159

161

163

Stepper Motors

Linear



Type **UCE/UCL**

UBL

**UO
Linear actuator
(LA5021ST)**

**UO
Spindle actuator
(SP5022ST)**

Dimensions (mm) $\varnothing 28 \times 33$

$\varnothing 36 \times 36$

$\varnothing 50 \times 76$

$\varnothing 50 \times 27$

Characteristics

- **new linear motor** using modules of the UC range
- integrated non-rotating threaded spindle

■ **general purpose** linear motor
■ for long travel version the spindle has to be retained externally

■ linear actuator with 3 step widths and 50 mm travel
■ integrated non-rotating threaded spindle

■ spindle type
■ threaded spindle has to be retained externally for **extended travel**

Travel (mm) 10/13

8/13/56

45–50

68–130

Travel per step (mm) 0,021/0,041

0,041

0,031/0,047/0,063

0,031/0,047/0,063

Thread pitch (mm) 1,0

0,8

1,5/1,5/1,5

1,5/1,5/1,5

Speed (mm/s)
at 200 Hz 4,16/8,33

8,33

6,25/9,37/12,5
7,5/11,25/15

6,25/9,37/12,5
7,5/11,25/15

Step angle ($^{\circ}$) 7,5/15

15

7,5/11,25/15

7,5/11,25/15

Max. Force (N) 35

35

45–50

50–70

Page 168/171

174

176

178

Electronics for Stepper Motors

Driver Boards



Type	Samotronic101	Samotronic102	Evaluation-Kit 2
Dimensions (mm)	55 x 40	84 x 54	metal case 164 x 130 x 45 (Euro-PCB)
Characteristics	<ul style="list-style-type: none">■ small unipolar driver board	<ul style="list-style-type: none">■ small bipolar driver board■ flash controller■ optional customised software	<ul style="list-style-type: none">■ tool for development, test and optimisation of stepper drive systems■ windows-based software■ quick parameter setup■ visualisation of speed and position■ positioning sequences capability
Driver	<ul style="list-style-type: none">■ for unipolar motors	<ul style="list-style-type: none">■ for bipolar motors	<ul style="list-style-type: none">■ for unipolar and bipolar motors
Supply voltage (V)	10–24 DC	standard version 10–24 DC enhanced version 10–42 DC	3–48 DC 24 AC
Motor current	constant voltage drive	constant current drive (chopper controlled) adjustable via potentiometer	constant voltage drive and constant current drive (chopper controlled)
Step mode	full/half step	full/half step	full/half/micro step
Clock source	internal or external	internal or external	internal, programmable
Control inputs to	<ul style="list-style-type: none">■ inhibit internal clock■ inhibit motor current■ change direction of rotation	<ul style="list-style-type: none">■ inhibit internal clock■ inhibit motor current■ change direction of rotation	<ul style="list-style-type: none">■ 3 digital inputs■ 4 signal outputs■ 1 analog input 0...10 VDC■ 1 relay contact
Configuration	via DIP-switch, potentiometer	via DIP-switch potentiometer	RS 232, USB
Page	182	183	184

Cam Programmers

Cam Programmers



Type **KKP**

Type **KKC**

Type **KKD0**

Type **KKD02 - 01/02**

Type **KKD4**

Characteristics	■ milled cams according ■ customer requests	■ milled cams according ■ customer requests	■ milled cams according ■ customer requests	■ segment cams adjustable ■ snap-on rider cams adjustable by customer.	■ no motor but shaft for external driving
Nombre channels	1, 2, 3, or 4	1 or 2	max. 30 Typ 4, 6, 8, 12, 20	max. 30 Typ 4, 6, 8, 12, 20	max. 30
Program duration	10 s ... 120 h	10 s ... 120 h	10 s ... 120 h	10 s ... 120 h	10 s ... 120 h
Motor	Synchro, unidir	Synchro, unidir	Synchro, unidir	Synchro, unidir	no motor
Voltage	230 V, 50 Hz 110 V, 60 Hz	230 V, 50 Hz 110 V, 60 Hz	230 V, 50 Hz 110 V, 60 Hz	230 V, 50 Hz 110 V, 60 Hz	230 V, 50 Hz 110 V, 60 Hz
Switching power	12 (6) A; UL 10 A	12 (6) A; UL 10 A	12 (6) A; UL 10 A	12 (6) A; UL 10 A	12 (6) A; UL 10 A
Accessories				with setting key with snap-on riders	
Page	186	188	190	192	204
Optional	other voltages, other switching power, clutches, adjusting knob, UL approval,				



Type **KKD1**

Type **KKD7**

Type **KKD2**

Type **KKD3**

Type **KKD6**

Characteristics	■ two motors ■ two speed	■ two independant programmms, driven by two motors	■ bidirectional	■ bidirectional with potentiometer 1 k ohm	■ with stepper motor
Nombre channels	max. 30	max. 30	max. 30	max. 30	max. 30
Program duration	10 s ... 120 h	10 s ... 120 h	10 s ... 120 h	10 s ... 120 h	10 s ... 120 h
Motor	Synchro, unidir	Synchro, unidir	Synchro, bidir	Synchro, bidir	Stepper
Voltage	230 V, 50 Hz 110 V, 60 Hz	230 V, 50 Hz 110 V, 60 Hz	230 V, 50 Hz 110 V, 60 Hz	230 V, 50 Hz 110 V, 60 Hz	230 V, 50 Hz 110 V, 60 Hz
Switching power	12 (6) A; UL 10 A	12 (6) A; UL 10 A	12 (6) A; UL 10 A	12 (6) A; UL 10 A	12 (6) A; UL 10 A
Accessories					samotronic
Page	194	196	198	200	202
Optional	other voltages, other switching power, clutches, adjusting knob, UL approval,				

Cam Programmers

Hand settable timer



Type	KKH	KKH – 100	KKH – 200	KKH – 300
Characteristics	<ul style="list-style-type: none"> ■ ■ 	<ul style="list-style-type: none"> ■ motor and load on same switch 	<ul style="list-style-type: none"> ■ motor and load on two separate switches 	<ul style="list-style-type: none"> ■ motor and 2 loads on three separate switches
Nombre channels	1, 2 or 3	1	2	3
Program duration	1 min ... 24 h	1 min ... 24 h	1 min ... 24 h	1 min ... 24 h
Motor	Synchro, unidir	Synchro, unidir	Synchro, unidir	Synchro, unidir
Voltage	230 V, 50 Hz 110 V, 60 Hz	230 V, 50 Hz 110 V, 60 Hz	230 V, 50 Hz 110 V, 60 Hz	230 V, 50 Hz 110 V, 60 Hz
Switching power	16 (6) A; UL 15 A	16 (6) A; UL 15 A	16 (6) A; UL 15 A	16 (6) A; UL 15 A
Accessories	Knob, fixing ...			
Page	208	210	212	214

Optional other voltages, other switching power, clutches, adjusting knob, UL approval,

With "on" position




Hand settable programmer



Type	KKH – 288	KKH – 388	KKH – 2 –	KKH – 3 –
Characteristics	<ul style="list-style-type: none"> ■ motor and load on two separate switches 	<ul style="list-style-type: none"> ■ motor and 2 loads on three separate switches 	<ul style="list-style-type: none"> ■ milled cams according customer requests 	<ul style="list-style-type: none"> ■ on three separate switches
Nombre channels	2	3	2	3
Program duration	1 min ... 24 h	1 min ... 24 h	1 min ... 24 h	1 min ... 24 h
Motor	Synchro, unidir	Synchro, unidir	Synchro, unidir	Synchro, unidir
Voltage	230 V, 50 Hz 110 V, 60 Hz	230 V, 50 Hz 110 V, 60 Hz	230 V, 50 Hz 110 V, 60 Hz	230 V, 50 Hz 110 V, 60 Hz
Switching power	16 (6) A; UL 15 A	16 (6) A; UL 15 A	16 (6) A; UL 15 A	16 (6) A; UL 15 A
Accessories				
Page	216	218	220	222

Optional other voltages, other switching power, clutches, adjusting knob, UL approval,

Synchronous Motors

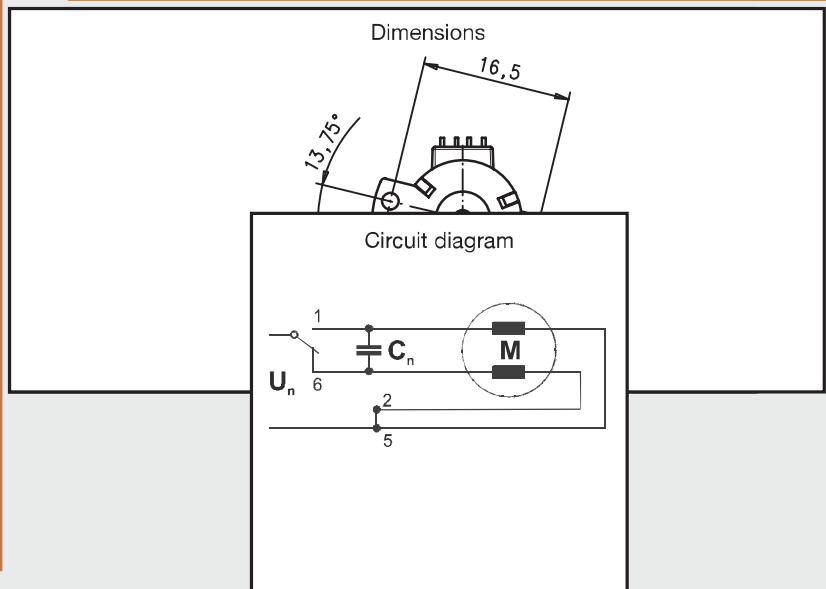

 JOHNSON
ELECTRIC

innovating motion

www.contact-evolution.com

URT

URT

Dimensions (mm)	$\varnothing 13 \times 11$
Voltage (V)	3–24
Speed (rpm) 50 Hz	600
Pole number	10
Running torque *	
(mNm) 50 Hz/60 Hz	0,6
Power output (W)	
50 Hz/60 Hz	0,038
Gear combination	—

* standard magnet



Standard Data

Climatic class	„wide-spread“ according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15 ... +60
Ambient temperature storage	°C -20 ... +100
Thermal resistance at f=0 R _{therm}	83 K/W
Thermal class	B according to DIN EN 60085
Approval	standard
Mounting	any position
Electrical connection	Pin, optional flex print
Protection	IP 40 according to DIN EN 60529
Weight	7 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	integrated high temperature plastic bearing

Order Reference

Type	Synchronous Motor	URT	1E	N	24 V / 50 Hz	R	N
Configuration	1E standard magnet						
Approval	N						
Voltage/Frequency	See next page						
Direction	R reversible						
Connector	N Pin						
	C flex print						

This motor type doesn't fulfil basis insulation requirements of EN 60335-1: 2004
Customer application must realize a suitable protection class.

URT


Technical Data

URT1

Rated frequency	Hz	50
Speed n	rpm	600
Running torque M_n *	mNm	0,6
Detent torque M_s *	mNm	0,3
Power output	W	0,038
Power consumption	VA	0,75
Rotor inertia J_R	gcm ²	0,033
Tolerance of voltage		standard power supply system +10%/-10%
Duty cycle		100%
Winding temperature T_{max}	°C	130
Direction of rotation		reversible
Capacitors	Rated voltage U_n	V
	Operating capacitor C50	µF/40 VAC

* standard magnet

Circuit diagram Parallel circuit

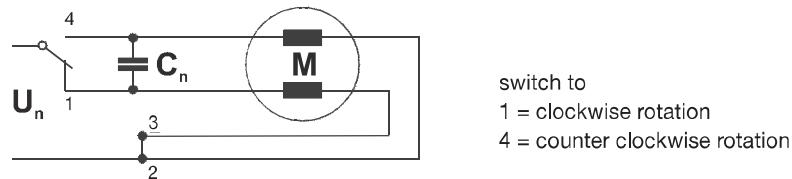

Dimensions


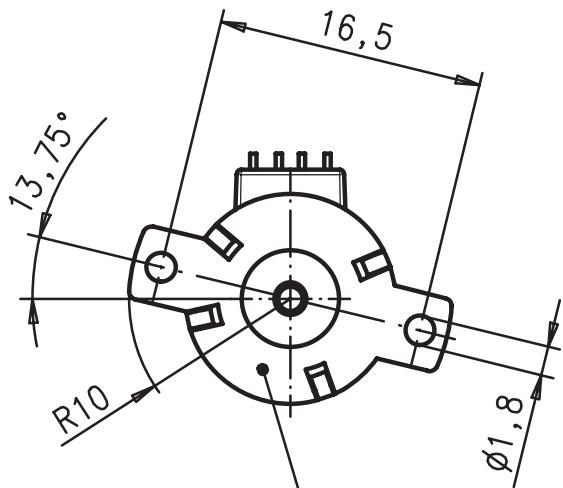



plate modification
customer- specified possible

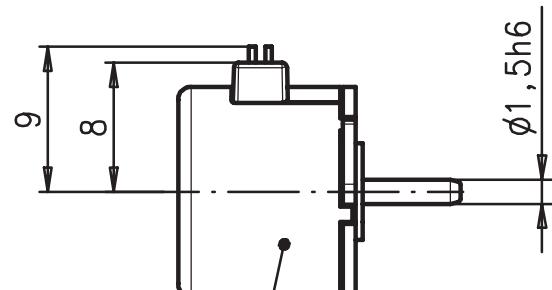


version with pin connection N

URT

Dimensions

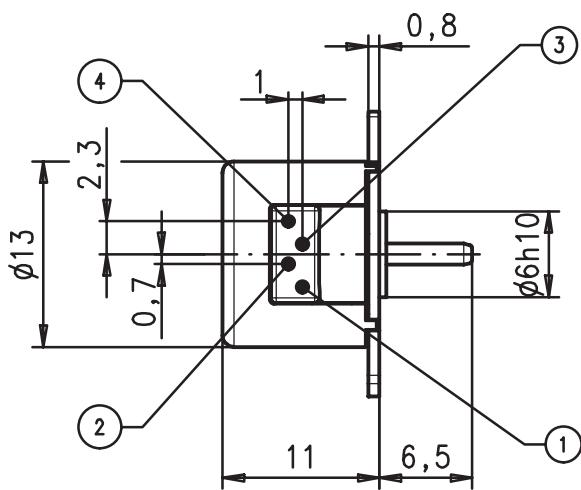

recommended FPC layout for
flex print connector 1 mm

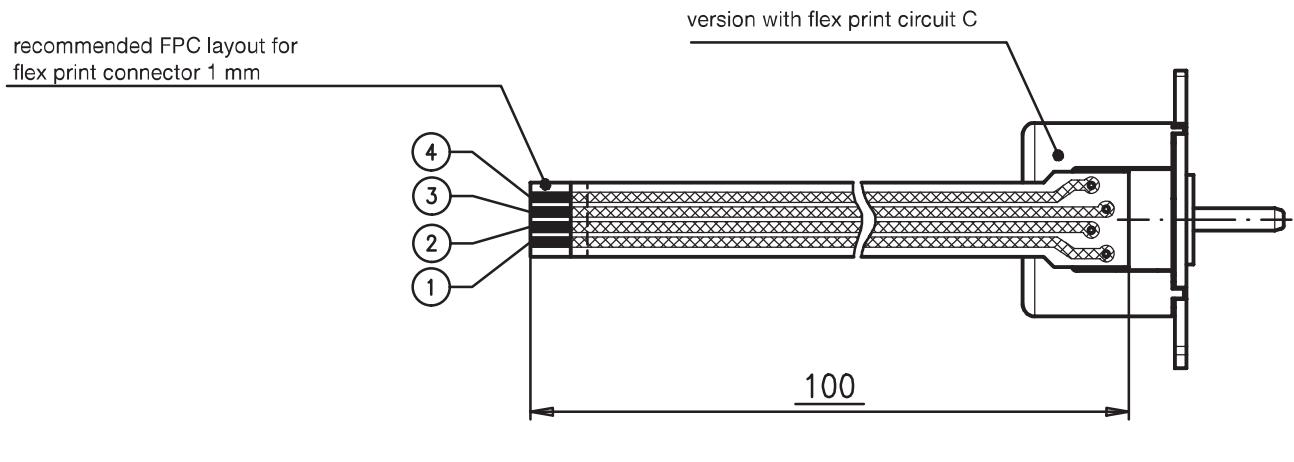

version with flex print circuit C

UAT1

UAT1

Dimensions (mm)	$\varnothing 20 \times 17,2$
Voltage (V)	12–48
Speed (rpm) 50 Hz	600
60 Hz	720
Pole number	10
Running torque (cNm) 50 Hz	0,31
60 Hz	0,3
Power output (W)	
50 Hz	0,19
60 Hz	0,23
Gear combination	on request



Standard Data

Climatic class	„wide-spread“ according to DIN IEC 60721-2-1
Ambient temperature operation	°C -40 ... +60
Ambient temperature storage	°C -40 ... +100
Thermal resistance at f=0 R _{therm}	50 K/W
Thermal class	„B“ according to DIN EN 60085
Approval	standard
Mounting	any position
Electrical connection	insulation displacement connection, pins, lead wires
Protection	IP 40 according to DIN EN 60529
Weight	25 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	sintered bronze, self-lubricating


Order Reference

Type	Synchronous Motor			UAT1	0	N	24 V/50 Hz	R	E
Rotor shaft, mounting	0	centring 8 mm, screw plate with thread M2							
	3	centring 8 mm, screw plate with slotted hole							
	A	centring 6 mm, screw plate with thread M2							
	E	centring 6 mm, screw plate with slotted hole							
Approval	N	Approval Standard							
Voltage/Frequency	See next page								
Direction	reversible								
Cable	E	Lead wires 150 mm with plug AMP MicroMatch 0-215083-6 (other on request)							

Technical Data


	Hz	50	60
Rated frequency			
Speed n	rpm	600	720
Power consumption	W	0,9	0,9
Power output	W	0,19	0,23
Running torque	cNm	0,3	0,3
Rotor inertia J _R	gcm ²	0,31	
Detent torque M _s	cNm	0,1	
Tolerance of voltage		standard power supply system + 10% / - 10%	
Duty cycle		100%	
Winding temperature T ^{max}	°C	130	
Direction of rotation		reversible	
Capacitors	Rated voltage U _N	V	24
	Operation capacitor C ₅₀	µF/VAC	2,2/40
	Operation capacitor C ₆₀	µF/VAC	2,2/40

Circuit diagram Parallel circuit

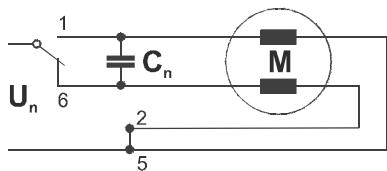

6 = clockwise rotation
1 = counter clockwise rotation

Dimensions

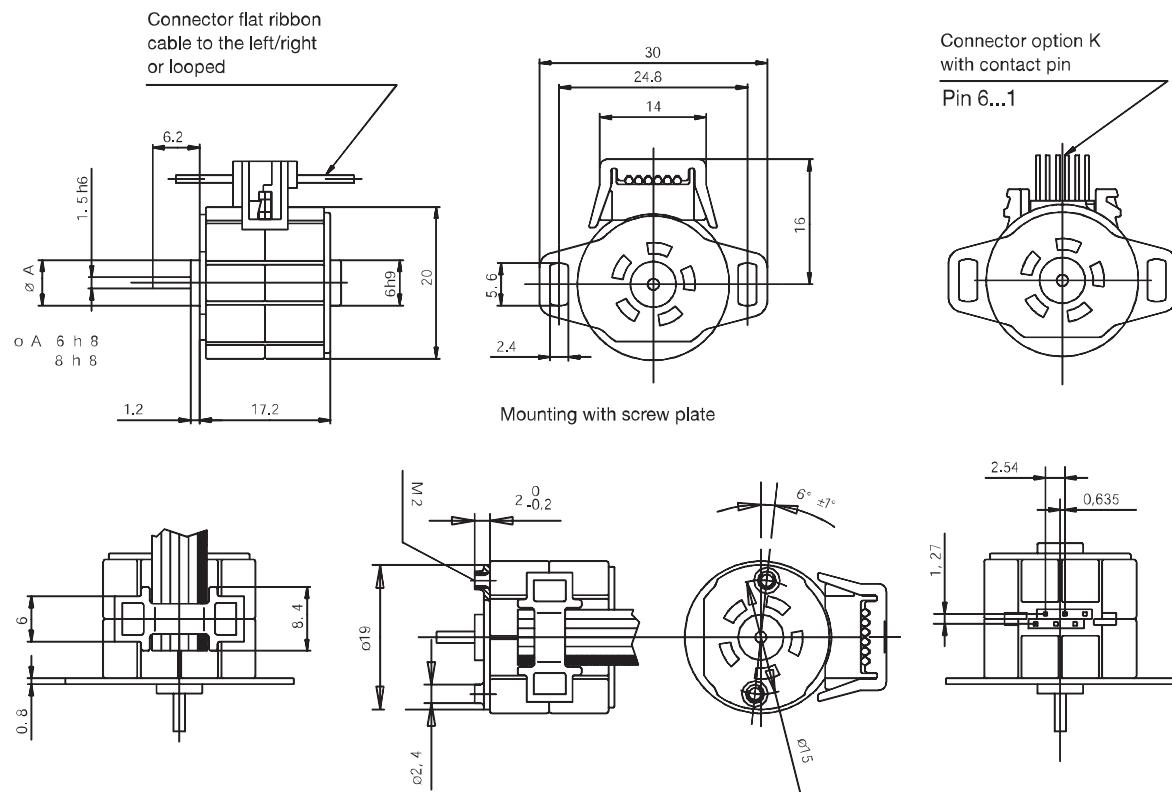

UAT3

UAT3

Dimensions (mm)	$\varnothing 20 \times 17,2$
Voltage (V)	24
Speed (rpm) 50 Hz	600
60 Hz	720
Pole number	10
Running torque (cNm) 50 Hz	0,32
60 Hz	0,3
Power output (W) 50 Hz	0,20
60 Hz	0,23
Gear combination	on request



Standard Data

Climatic class	„wide-spread“ according to DIN IEC 60721-2-1
Ambient temperature operation	$^{\circ}\text{C} -20 \dots +60$
Ambient temperature storage	$^{\circ}\text{C} -40 \dots +100$
Thermal resistance at $f=0$ R_{therm}	47 K/W
Thermal class	„B“ according to DIN EN 60085
Approval	standard
Mounting	any position
Electrical connection	lead wires
Protection	IP 40 according to DIN EN 60529
Weight	22 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	sintered bronze, self-lubricating

Order Reference


Type	Synchronous Motor	UAT3	3	N	24 V/50 Hz	R	E
Rotor shaft, mounting	3 centring 8 mm, mounting plate with long holes 5 centring 8 mm, mounting plate (for clipping) E centring 6 mm, mounting plate with long holes G centring 6 mm, mounting plate (for clipping)						
Approval	N Approval Standard						
Voltage/Frequency	See next page						
Direction	reversible						
Cable	E cable 150 mm with Tyco connector CT 173977-4 (other on request)						

UAT3




Technical Data

	Hz	50	60
Speed n	rpm	600	720
Power consumption	W	1,4	1,4
Power output	W	0,20	0,23
Running torque	cNm	0,32	0,30
Rotor inertia J _R	gcm ²	0,26	
Detent torque M _s	mNm	> 0,6	
Tolerance of voltage		standard power supply system + 10% / - 10%	
Duty cycle		100%	
Winding temperature T _{max}	°C	130	
Direction of rotation		reversible	
Capacitors	Rated voltage U _N	V	24
	Operation capacitor C ₅₀	µF/VAC	3,3/40
	Operation capacitor C ₆₀	µF/VAC	2,7/40

Circuit diagram Parallel circuit

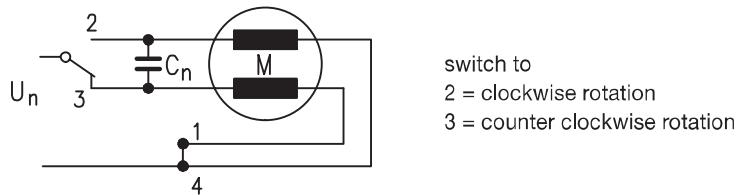

Dimensions

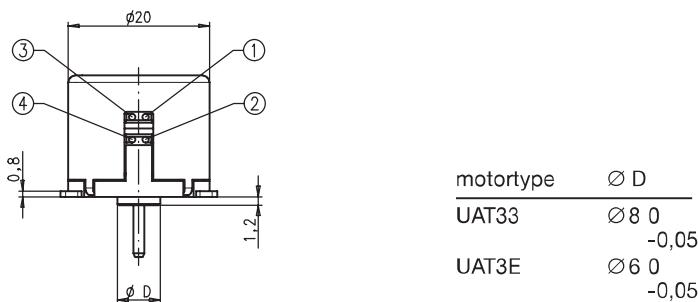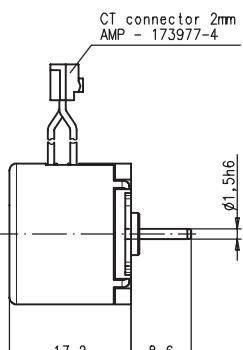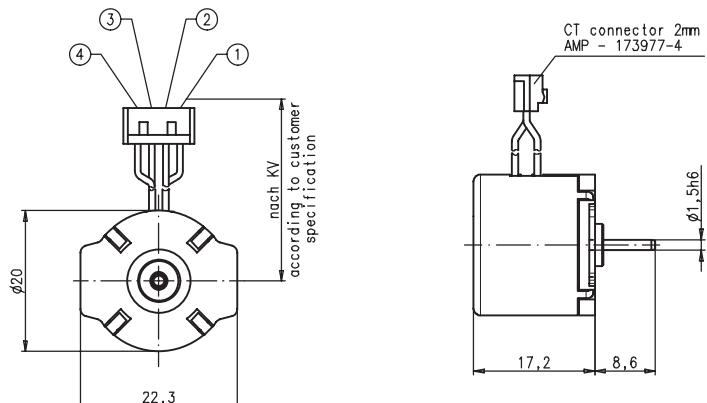

UCM1/7

Dimensions (mm)	Ø 28 x 24
Voltage (V) *	12–230
Speed (rpm) 50 Hz	250
Pole number	24
Running torque **	
(cNm) 50 Hz	1,2–1,3
60 Hz	1,2–1,3
Power output (W) **	
50 Hz	0,31–0,34
60 Hz	0,38–0,41
Gear combination	on request



* regard circuit diagram and connector type

** values for lead wire version (connection N) / connector versions up to 15 % higher

Standard Data

Climatic class	„wide-spread“ according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15 ... +60
Ambient temperature storage	°C -20 ... +100
Thermal resistance at f=0 R _{therm}	29 K/W
Thermal class	B according to DIN EN 60085
Approval	standard
Mounting	any position
Electrical connection	connector type D or N
Protection	IP 30 according to DIN EN 60529
Weight	54 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	Sintered bronze, self-lubricating

Order Reference


Type	Synchronous Motor	UCM	1	0	N	24 V / 50 Hz	R	D
Configuration	1 standard magnet							
	7 stronger magnet							
Rotor shaft, mounting	3 centring 8 mm, shaft 2,0 mm, screw plate	E	centring 10 mm, shaft 2,0 mm, screw plate					
	4 centring 8 mm, shaft 1,5 mm, screw plate	K	centring 10 mm, shaft 1,5 mm, screw plate					
	0 centring 8 mm, shaft 2,0 mm, clip	A	centring 10 mm, shaft 2,0 mm, clip					
	1 centring 8 mm, shaft 1,5 mm, clip	C	centring 10 mm, shaft 1,5 mm, clip					
Approval	N Approval Standard							
Voltage/Frequency	see next pages							
Direction	R reversible							
Connection	D see next pages „Connection Types“							
	N							

Technical Data


		UCM1	UCM1	UCM7	UCM7	
bipolar	Rated frequency	Hz	50	60	50	60
	Speed n	rpm	250	300	250	300
	Running torque *	cNm	1,2	1,2	1,3	1,3
	Detent torque M _s	cNm	0,18		0,18	0,36
	Power output *	W	0,31		0,38	0,34
	Power consumption	VA	2,2	2,2	2,2	2,2
	Rotor inertia J _R	gcm ²	2,2	2,2	2,4	2,4
	Tolerance of voltage			standard power supply system +10%/-10%		
	Duty cycle		100%			
	Winding temperature T _{max}	°C	130			
	Direction of rotation		reversible			
Capacitors	Rated voltage U _N	V	12	24	110	
	Operating capacitor C ₅₀	µF/V~	18/20	4,7/40	0,33/200	

* values for lead wire version (connection N) / connector versions up to 15 % higher

Circuit diagram Parallel circuit 12 V, 24 V, 48 V, 110 V

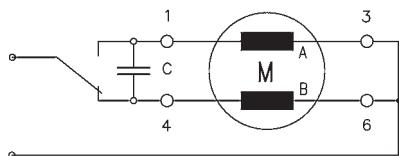


Parallel circuit 230 V (only for connector N)
with 110 V motor and resistor R_v

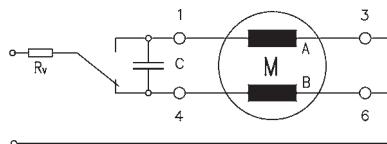

switch to


- 1 clockwise rotation
- 4 counter clockwise rotation
- 6 counter clockwise rotation
(for series circuit)

Parallel circuit 230 V (only for connector N)
with 110 V motor and capacitor C_v

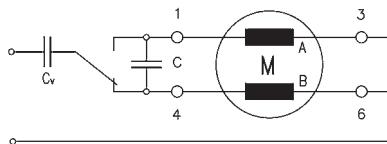


Series resistor R_v = 5,6 kΩ, 3 W
Series capacitor C_v = 0,33 µF, 250 VAC

Dimensions Version with Connector D

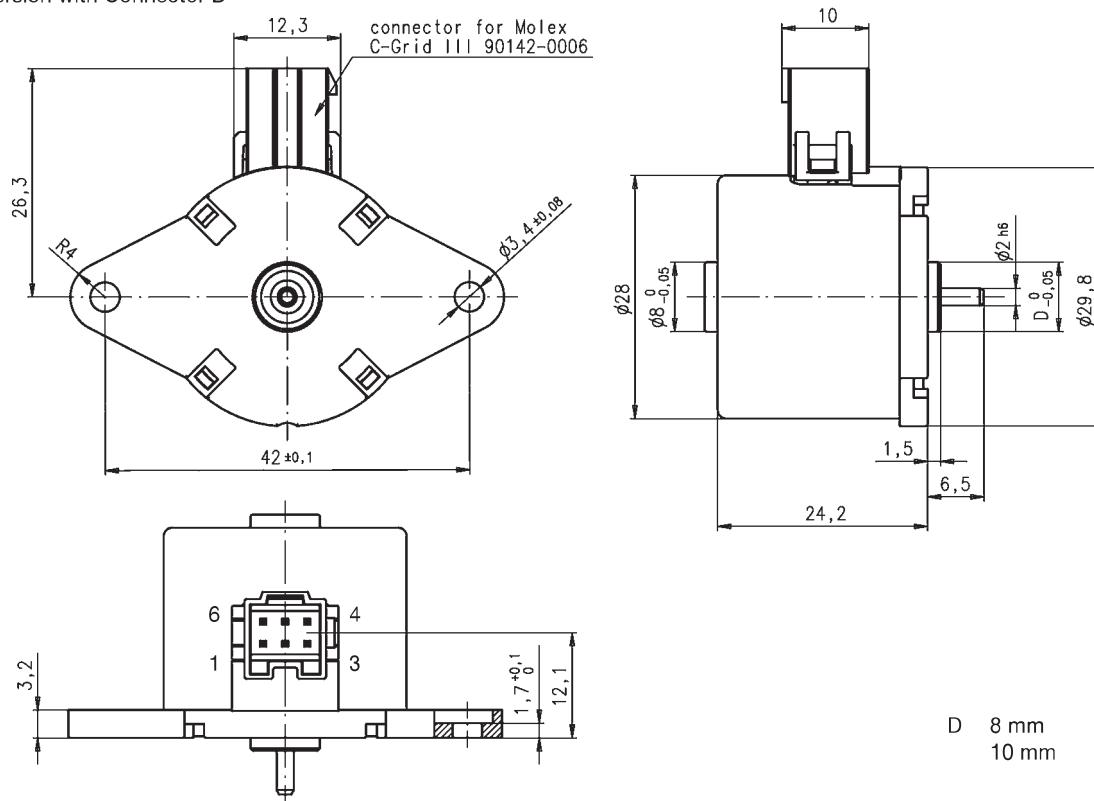

Version with Connector N

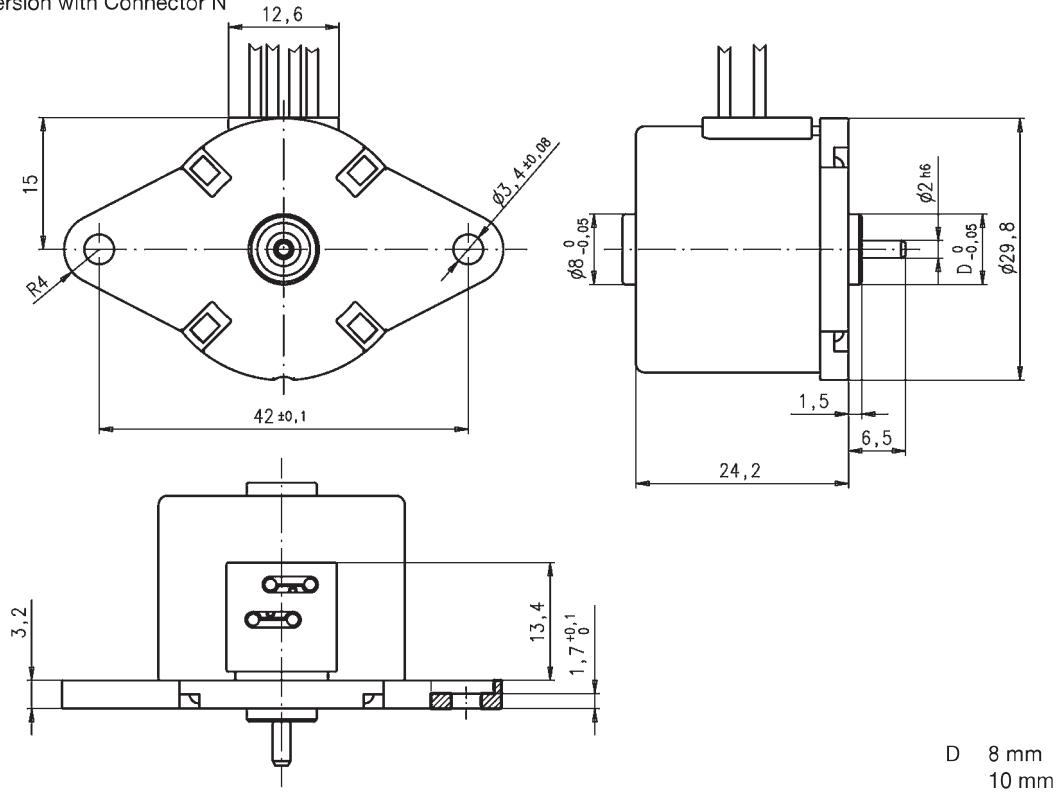

UCR1/7

Dimensions (mm)	Ø 28 x 24
Voltage (V) *	12–230
Speed (rpm) 50 Hz	500
Pole number	12
Running torque **	
(cNm) 50 Hz	0,8–1,1
60 Hz	0,8–1,1
Power output (W) **	
50 Hz	0,42–0,58
60 Hz	0,50–0,69
Gear combination	on request



* regard circuit diagram and connector type

** values for lead wire version (connection N) / connector versions up to 15 % higher

Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15 ... +60
Ambient temperature storage	°C -20 ... +100
Thermal resistance at f=0 R _{therm}	29 K/W
Thermal class	B according to DIN EN 60085
Approval	standard
Mounting	any position
Electrical connection	connector type D or N
Protection	IP 30 according to DIN EN 60529
Weight	54 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	Sintered bronze, self-lubricating

Order Reference


Type	Synchronous Motor	UCR	1	0	N	24 V / 50 Hz	R	D
Configuration	1 standard magnet							
	7 stronger magnet							
Rotor shaft, mounting	3 centring 8 mm, shaft 2,0 mm, screw plate 4 centring 8 mm, shaft 1,5 mm, screw plate 0 centring 8 mm, shaft 2,0 mm, clip 1 centring 8 mm, shaft 1,5 mm, clip	E K A C	centring 10 mm, shaft 2,0 mm, screw plate centring 10 mm, shaft 1,5 mm, screw plate centring 10 mm, shaft 2,0 mm, clip centring 10 mm, shaft 1,5 mm, clip					
Approval	N Approval Standard							
Voltage/Frequency	see next pages							
Direction	R reversible							
Connection	D see next pages „Connection Types“ N Cable							

Technical Data


			UCR1	UCR1	UCR7	UCR7
bipolar	Rated frequency	Hz	50	60	50	60
	Speed n	rpm	500	600	500	600
	Running torque *	cNm	0,8	0,8	1,1	1,1
	Detent torque M _s	cNm	0,18		0,18	0,4
	Power output *	W	0,42		0,50	0,58
	Power consumption	VA	2,2	2,2	2,2	2,2
	Rotor inertia J _R	gcm ²	2,1		2,1	2,4
	Tolerance of voltage				standard power supply system +10%/-10%	
	Duty cycle				100%	
	Winding temperature T _{max}	°C			130	
	Direction of rotation				reversible	
Capacitors	Rated voltage U _N	V	12	24	110	
	Operating capacitor C ₅₀	µF/V~	22/20	5,6/40	0,27/200	

* values for lead wire version (connection N) / connector versions up to 15 % higher

Circuit diagram Parallel circuit 12 V, 24 V, 48 V, 110 V

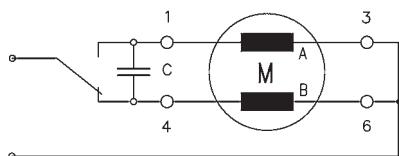


Parallel circuit 230 V (only for connector N)
with 110 V motor and resistor R_v

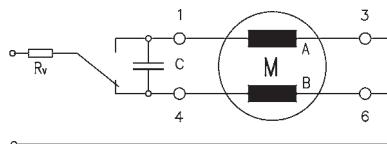

switch to


- 1 clockwise rotation
- 4 counter clockwise rotation
- 6 counter clockwise rotation
(for series circuit)

Parallel circuit 230 V (only for connector N)
with 110 V motor and capacitor C_v

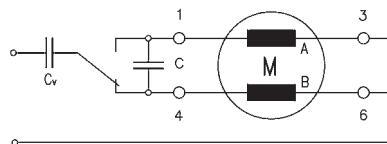


Series resistor R_v = 5,6 kΩ, 3 W
Series capacitor C_v = 0,33 µF, 250 VAC

Dimensions Version with Connector D

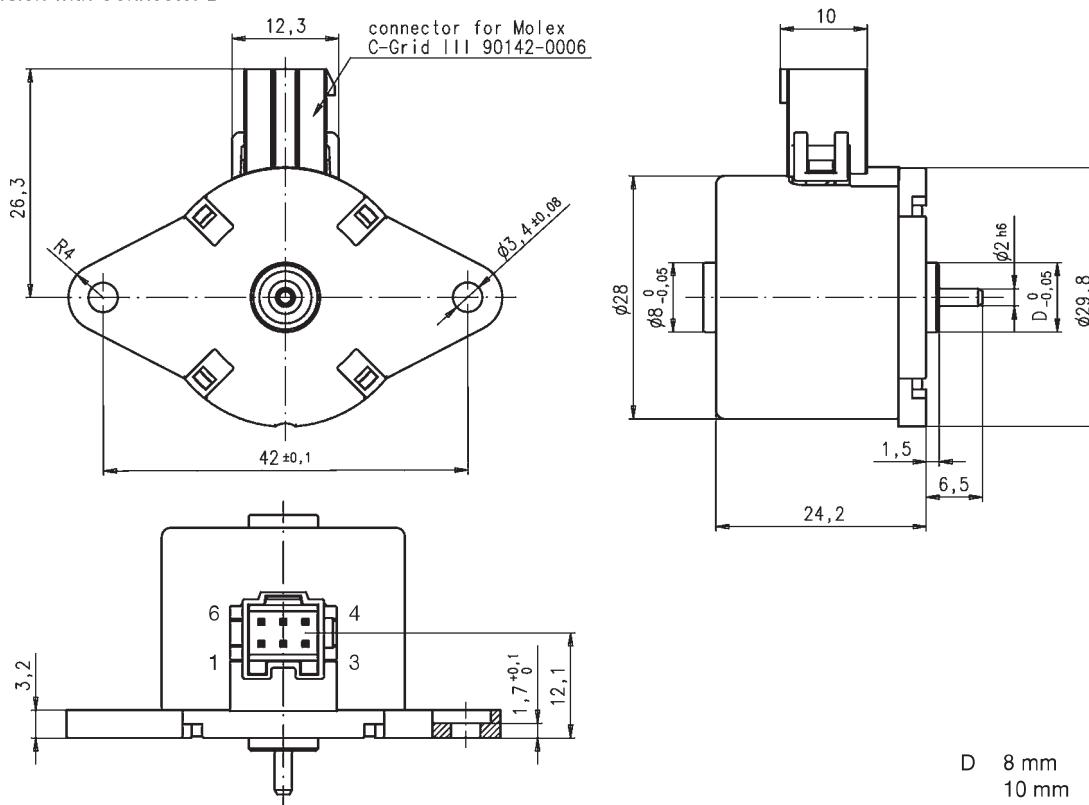

Version with Connector N

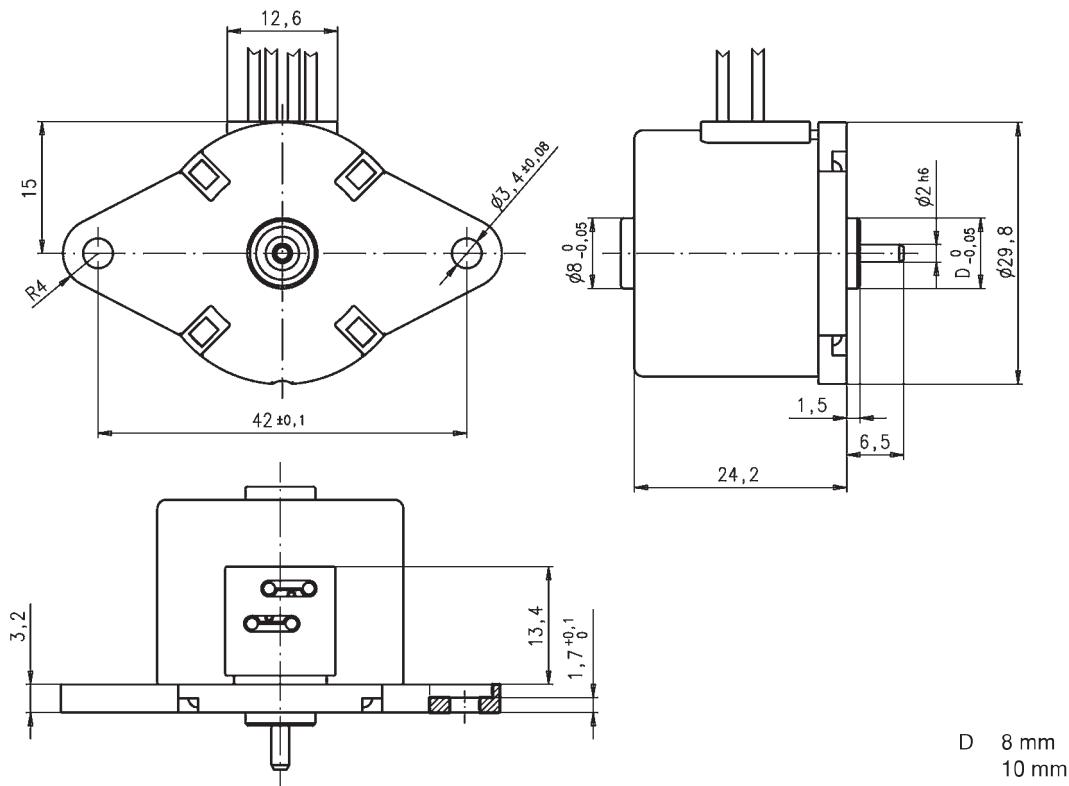

UBR1

UBR1

Dimensions (mm)	$\varnothing 36 \times 21$
Voltage (V)	12–230
Speed (rpm) 50 Hz	250
60 Hz	300
Pole number	24
Running torque (cNm) 50 Hz	0,9
60 Hz	0,9
Power output (W) 50 Hz	0,24
60 Hz	0,28
Gear combination	A, D, M, B, F, V, J



Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15...+55
Ambient temperature storage	°C -20...+100
Thermal resistance at f=0 R _{therm}	27 K/W
Thermal class	A according to DIN EN 60085
Approval	standard (UL/CSA on request)
Mounting	any position
Electrical connection	cable
Protection	IP 40 according to DIN EN 60529
Weight	60 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	sintered bronze, self-lubricating
Electric strength	according to DIN EN 60034-1/DIN EN 60335-1

Order Reference


Type	Synchronous Motor	UBR1	0	N	24 V/50 Hz	R	E
Rotor shaft, mounting	0 centring 8 mm, shaft 2,0 mm, clip 1 centring 8 mm, shaft 1,5 mm, clip 3 centring 8 mm, shaft 2,0 mm, screw plate 4 centring 8 mm, shaft 1,5 mm, screw plate	A C E K	centring 10 mm, shaft 2,0 mm, clip centring 10 mm, shaft 1,5 mm, clip centring 10 mm, shaft 2,0 mm, screw plate centring 10 mm, shaft 1,5 mm, screw plate				
Approval	N Approval Standard						
Voltage/Frequency	See next page						
Direction	reversible						
Cable	E cable 150 mm (other on request)						

UBR1


Technical Data

	Hz	50	60				
Speed n	rpm	250	300				
Power consumption	W	1,3	1,3				
Power output	W	0,24	0,28				
Running torque	cNm	0,9	0,9				
Rotor inertia J _R	gcm ²	2,8					
Detent torque M _S	cNm	0,22					
Tolerance of voltage		standard power supply system + 10% / - 10%					
Duty cycle		100%					
Winding temperature T _{max}	°C	105					
Direction of rotation		reversible					
Capacitors	Rated voltage U _N	V	12	24	48	110	230
	Operation capacitor C ₅₀	µF/VAC	12/20	3,3/40	0,82/200	0,15/200	0,22/200
	Operation capacitor C ₆₀	µF/VAC	12/20	3,3/40	0,82/200	0,15/200	0,12/200


Circuit diagram Parallel circuit 12V, 24V, 48V, 110V

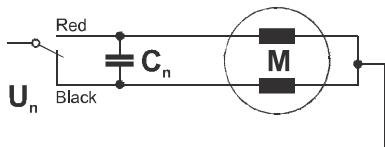


Parallel circuit 230V

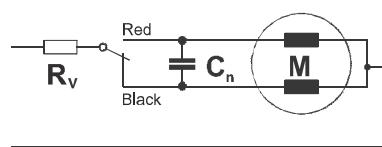


Series circuit 230V

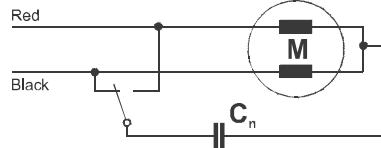


Parallel circuit 230V

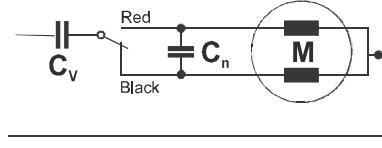Red = clockwise rotation
Black = counter clockwise rotation

Dimensions Mounting with screw plate

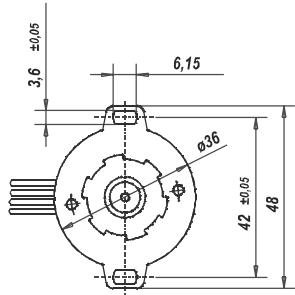

Mounting with snap on clip

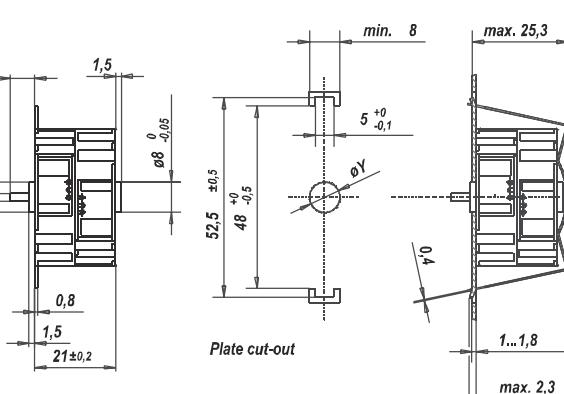

øD Rotor shaft

ø 2 h6

ø 1,5 js8

øZ

øY


8 8FB

10 10F8

UBR2

UBR2

Dimensions (mm)	\varnothing 36 x 21
Voltage (V)	12-230
Speed (rpm) 50 Hz	500
60 Hz	600
Pole number	12
Running torque (cNm) 50 Hz	0,75
60 Hz	0,72
Power output (W)	
50 Hz	0,39
60 Hz	0,45
Gear combination	A, D, M, B, F, V, J

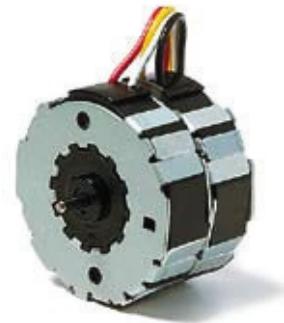

Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15...+55
Ambient temperature storage	°C -20...+100
Thermal resistance at f=0 R _{therm}	27 K/W
Thermal class	A according to DIN EN 60085
Approval	standard (UL/CSA on request)
Mounting	any position
Electrical connection	cable
Protection	IP 40 according to DIN EN 60529
Weight	60 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	sintered bronze, self-lubricating
Electric strength	according to DIN EN 60034-1/DIN EN 60335-1

Order Reference


Type	Synchronous Motor	UBR2	:	0	:	N	:	24 V/50 Hz	:	R	:	E
Rotor shaft, mounting	0 centring 8 mm, shaft 2,0 mm, clip	A	centring 10 mm, shaft 2,0 mm, clip									
	1 centring 8 mm, shaft 1,5 mm, clip	C	centring 10 mm, shaft 1,5 mm, clip									
	3 centring 8 mm, shaft 2,0 mm, screw plate	E	centring 10 mm, shaft 2,0 mm, screw plate									
	4 centring 8 mm, shaft 1,5 mm, screw plate	K	centring 10 mm, shaft 1,5 mm, screw plate									
Approval	N Approval Standard											
Voltage/Frequency	See next page											
	reversible											
Direction	E cable 150 mm (other on request)											
Cable												

UBR2


Technical Data

Rated frequency	Hz	50	60				
Speed n	rpm	500	600				
Power consumption	W	1,6	1,6				
Power output	W	0,39	0,45				
Running torque	cNm	0,75	0,72				
Rotor inertia J _R	gcm ²	2,8					
Detent torque M _s	cNm	0,25					
Tolerance of voltage		standard power supply system + 10% / - 10%					
Duty cycle		100%					
Winding temperature T _{max}	°C	105					
Direction of rotation		reversible					
Capacitors	Rated voltage U _n	V	12	24	48	110	230
	Operation capacitor C ₅₀	µF/VAC	15/20	3,9/40	1,0/70	0,18/170	0,27/170
	Operation capacitor C ₆₀	µF/VAC	15/20	3,9/40	1,0/70	0,18/170	0,22/170


Circuit diagram Parallel circuit 12V, 24V, 48V, 110V

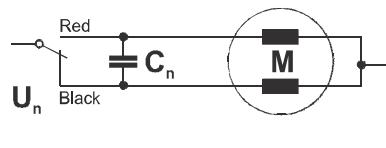


Parallel circuit 230V

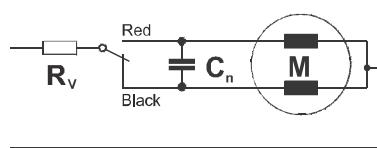

Series circuit 230V

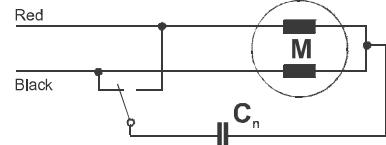


Parallel circuit 230V

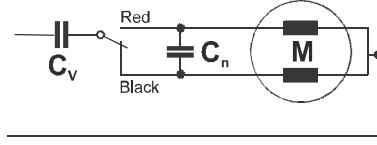


Red = clockwise rotation
Black = counter clockwise rotation

Dimensions Mounting with screw plate

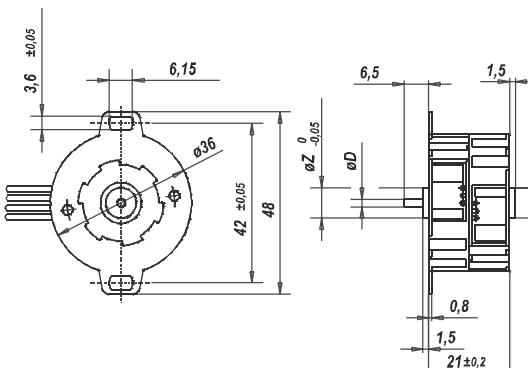

Mounting with snap on clip

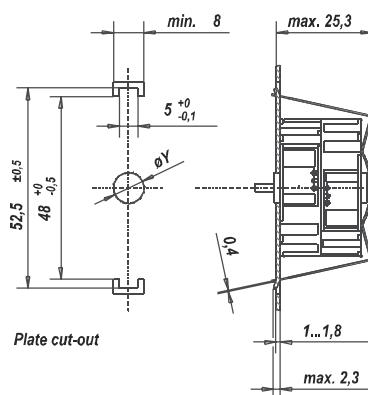

ØD Rotor shaft

Ø 2 h6

Ø 1,5 js8

ØZ ØY

8 8F8

10 10F8

UDR1

Dimensions (mm)	$\varnothing 48 \times 24$
Voltage (V)	12–230
Speed (rpm) 50 Hz	500
60 Hz	600
Pole number	12
Running torque (cNm) 50 Hz	1,5
60 Hz	1,4
Power output (W)	
50 Hz	0,77
60 Hz	0,87
Gear combination	A, D, M, B, F, V, J

**Standard Data**


Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15...+60
Ambient temperature storage	°C -20...+100
Thermal resistance at f=0 R _{therm}	18 K/W
Thermal class	A according to DIN EN 60085
Approval	standard/UL/CSA
Mounting	any position
Electrical connection	cable
Protection	IP 40 according to DIN EN 60529
Weight	132 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	sintered bronze, self-lubricating
Electric strength	according to DIN EN 60034-1/DIN EN 60335-1

Order Reference

Type	Synchronous Motor	UDR1	0	N	24 V/50 Hz	R	N
Rotor shaft, mounting	0 centring 8 mm, shaft 1,5 mm, clip 1 centring 8 mm, shaft 2,0 mm, clip						
Approval	N Approval Standard U Approval UL/CSA						
Voltage/Frequency	See next page						
Direction	reversible						
Cable	N cable 150 mm (other on request)						


Technical Data

	Hz	50	60		
Rated frequency					
Speed n	rpm	500	600		
Power consumption	W	2,1	2,2		
Power output	W	0,77	0,87		
Running torque	cNm	1,5	1,4		
Rotor inertia J _R	gcm ²	6,3			
Detent torque M _S	cNm	0,35			
Tolerance of voltage		standard power supply system + 10% / - 10%			
Duty cycle		100 %			
Winding temperature T _{max}	°C	105			
Direction of rotation		reversible			
Capacitors	Rated voltage U _N	V	12	24	48
	Operation capacitor C ₅₀	µF/VAC	27/20	6,8/40	1,5/100
	Operation capacitor C ₆₀	µF/VAC	22/20	4,7/40	1,5/100
Circuit diagram	Parallel circuit				

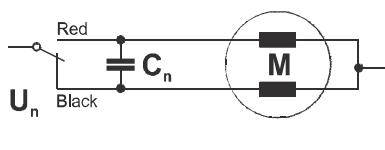


Red = clockwise rotation
Black = counter clockwise rotation


Dimensions

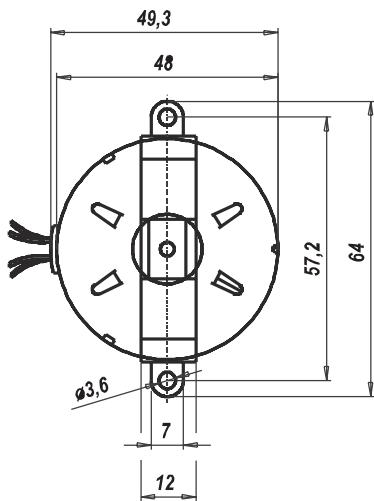

Mounting with screw clip

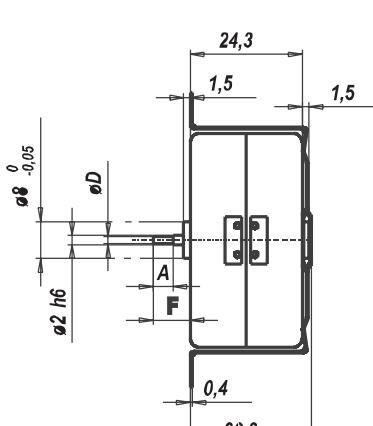

Mounting with snap-on clip

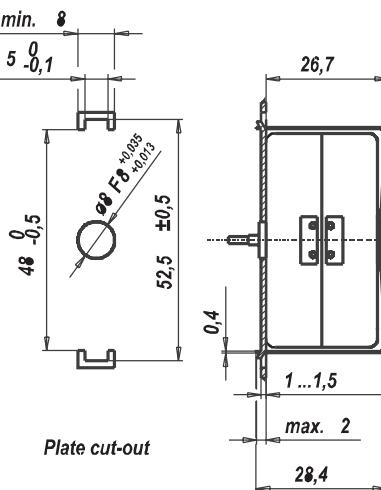

øD Rotor shaft

ø 1,5 js8 ^{+0,007} _{-0,007}

ø 2 h6 ⁰ _{-0,006}

Dimension A Dimension F

4,3 6,5

— 8,2

UDS

UDS1

Dimensions (mm)	\varnothing 48 x 18,5
Voltage (V)	6-230
Speed (rpm) 50 Hz	500
60 Hz	600
Pole number	12
Running torque (cNm) 50 Hz	0,9
60 Hz	0,8
Power output (W) 50 Hz	0,5
60 Hz	0,5
Gear combination	A, D, M, B, F, V, J



Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15...+60
Ambient temperature storage	°C -20...+100
Thermal resistance at f=0 R _{therm}	17 K/W
Thermal class	A according to DIN EN 60085
Approval	standard/UL/CSA
Mounting	any position
Electrical connection	cable
Protection	IP 40 according to DIN EN 60529
Weight	102 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	plastic, self-lubricating
Electric strength	according to DIN EN 60034-1/DIN EN 60335-1


Order Reference

Type	Synchronous Motor		UDS1	0	N	24 V/50 Hz	R	N
Rotor shaft, mounting	0	centring 8 mm, shaft 1,5 mm, clip						
	1	centring 8 mm, shaft 2,0 mm, clip						
Approval	N	Approval Standard						
	U	Approval UL/CSA						
Voltage/Frequency	See next page							
Direction	R	clockwise rotation						
	L	Counter-clockwise rotation						
Cable	N	cable 150 mm (other on request)						

Technical Data

Rated frequency	Hz	50	60
Speed n	rpm	500	600
Power consumption	W	2,4	1,8
Power output	W	0,5	0,5
Running torque	cNm	0,9	0,8
Rated voltage U _N	V	6, 12, 24, 48, 110, 230	
Rotor inertia J _R	gcm ²	11	
Detent torque M _S	cNm	0,27 (in direction of rotation)	
Tolerance of voltage		standard power supply system + 10% / - 10%	
Duty cycle		100 %	
Winding temperature T _{max}	°C	105	
Direction of rotation		clockwise or counter-clockwise	

Dimensions

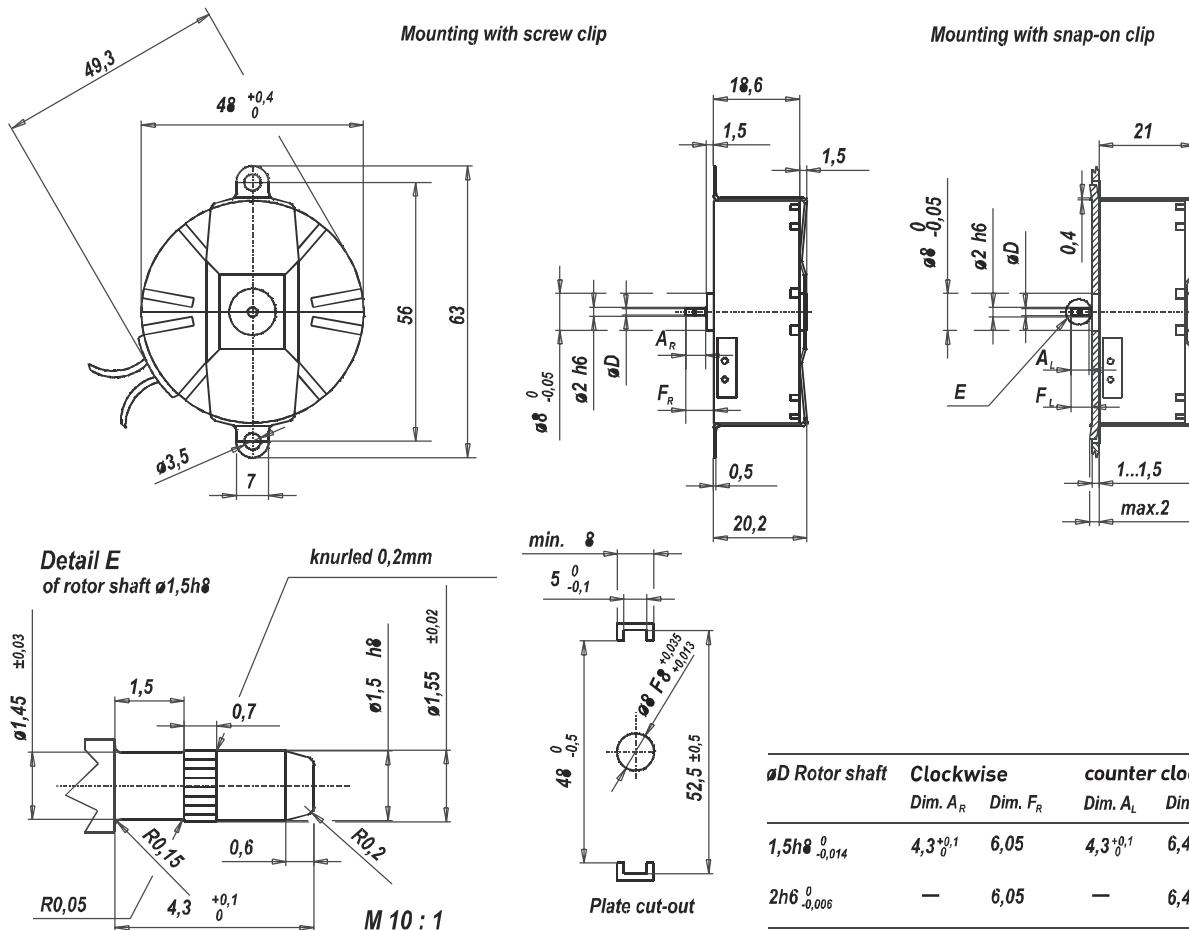

UO (SM5021; SM5022)

Dimensions (mm)	$\varnothing 50 \times 21$
Voltage (V)	6–230
Speed (rpm) 50 Hz	250/375/500
60 Hz	300/450/600
Pole number	24/16/12
Running torque (cNm) 50 Hz	2,0–3,3 (SM5021); 3,3–7,5 (SM5022)
60 Hz	1,8–3 (SM5021); 4,5–7,0 (SM5022)
Power output (W) 50 Hz	0,65–2,75 (SM5021); 1,3–2,73 (SM5022)
60 Hz	0,78–3,0 (SM5021); 1,8–2,83 (SM5022)
Gear combination	VK4, O, P, R



SM5021

SM5022

Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15 ... +40
Ambient temperature storage	°C -20 ... +100
Thermal class	B (SM5021) ; A (SM5022) according to DIN EN 60085
Approval	standard
Mounting	any position
Electrical connection	cable
Protection	IP 30 according to DIN EN 60529
Weight	170 ... 180 g (SM5021); 180 ... 195 g (SM5022)
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	Sintered bronze, self-lubricating


Order Reference

Type	Synchronous Motor	SM5021 R / SM5022 R	250	24 V	50 Hz
rpm	250 375 500				
Voltage	24 V 110 V 230 V				
Frequency	50 Hz 60 Hz 50/60 Hz				


Technical Data

Motor type		R-250/1	R250/1	R-500/1	R-500/1	R-375/1	R-375/1	R-375/2	R-375/2
(SM5021)	Rated frequency	Hz	50	60	50	60	50	60	50
	Speed of rotation	rpm	250	300	500	600	375	450	375
	Running torque M _n	cNm	2,5	2,5	2	1,8	2,3	2	3,3
	Power output	W	0,65	0,78	1	1,1	0,9	0,95	1,3
	Power consumption	VA	3,86	4,37	4,37	4,83	4,2	4,6	6
	Nominal current at 230 V	mA	16,8	19	19	21	18,3	20	26
	Max. permissible ext. inertia	gcm ²	30	10	10	10	15	10	10
	Detent torque M _s	cNm	0,25	0,25	0,25	0,25	0,25	0,25	0,25
	Winding temperature increase	K	55	60	63	70	60	65	80
	Weight	g	180	180	170	170	180	180	180
Capacitors	at U _N : 24 V	μF/V~	10/63	10/63	10/63	10/63	10/63	15/63	15/63
	at U _N : 110 V	μF/V~	0,47/250	0,47/250	0,47/250	0,47/250	0,47/250	0,75/250	0,75/250
	at U _N : 230 V	μF/V~	0,12/500	0,12/500	0,12/500	0,12/500	0,12/500	0,18/500	0,18/500
Motor type (SM5022)		R-250/1	R-250/1	R-250/S2	R-250/S2	R-375/1	R-375/1	R-375/S2	R-375/S2
	Rated frequency	Hz	50	60	50	60	50	60	60
	Speed of rotation	rpm	250	300	250	300	375	450	375
	Running torque M _n	cNm	6	5,7	7,5	7	4,7	4,5	7
	Power output	W	1,57	1,8	2	2,2	1,85	2,1	2,7
	Power consumption	VA	6,1	6,6	9	9,7	6,45	6,9	9,2
	Nominal current at 230 V	mA	26,5	28,7	39,1	42,2	28	30	45
	Max. permissible ext. inertia	gcm ²	50	20	60	30	60	40	40
	Detent torque M _s	cNm	1	1	1	1	1	1	1
	Winding temperature increase	K	85	90	60 (S2 10 min.)	85	90	60 (S2 10 min.)	
	Weight	g	195	195	195	195	195	195	195
Capacitors	at U _N : 24 V	μF/V~	15/63	15/63	25/63	25/63	15/63	15/63	25/63
	at U _N : 110 V	μF/V~	0,75/250	0,75/250	1,2/250	1,2/250	0,75/250	0,75/250	1,2/250
	at U _N : 230 V	μF/V~	0,18/500	0,18/500	0,27/500	0,27/500	0,18/500	0,18/500	0,27/500
Motor type		R-500	R-500	R-500/S2	R-500/S2				
	Rated frequency	Hz	50	60	50	60			
	Speed of rotation	rpm	500	600	500	600			
	Running torque M _n	cNm	3,7	3,2	5,2	4,5			
	Power output	W	1,94	2	2,73	2,83			
	Power consumption	VA	6,21	6,67	8,85	9,2			
	Nominal current at 230 V	mA	27	29	38,5	40			
	Max. permissible ext. inertia	gcm ²	35	15	45	25			
	Detent torque M _s	cNm	1	1	1	1			
	Winding temperature increase	K	85	90	55 (S2 10 min.)				
	Weight	g	195	195	195	195			
Capacitors	at U _N : 24 V	μF/V~	15/63	15/63	25/63	25/63			
	at U _N : 110 V	μF/V~	0,75/250	0,75/250	1,2/250	1,2/250			
	at U _N : 230 V	μF/V~	0,18/500	0,18/500	0,27/500	0,27/500			

Circuit diagram Parallel circuit

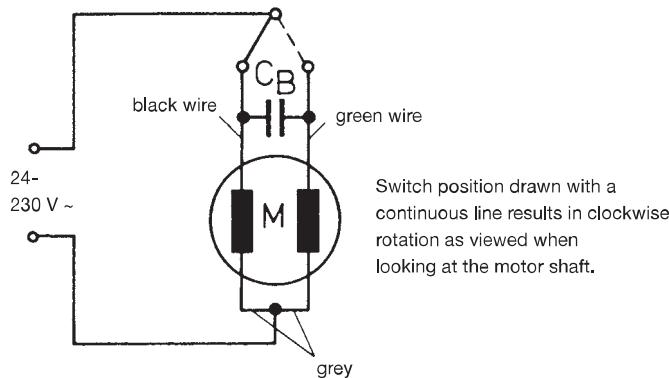

Dimensions

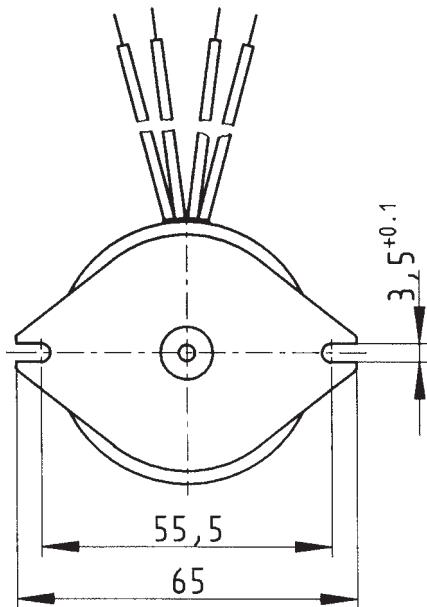

Standard - wire length: 200 mm / 4 mm stripped
General tolerances acc. to DIN ISO 2768-mk



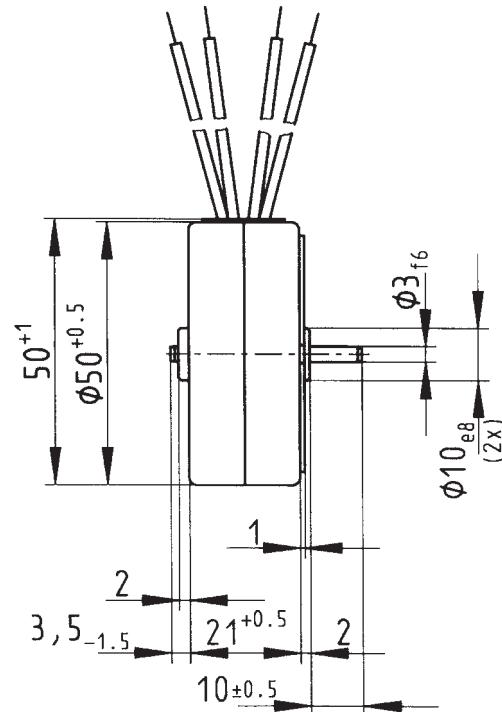


Chart: Torque versus voltage


UOM1 (SM 5021 R-250/1)

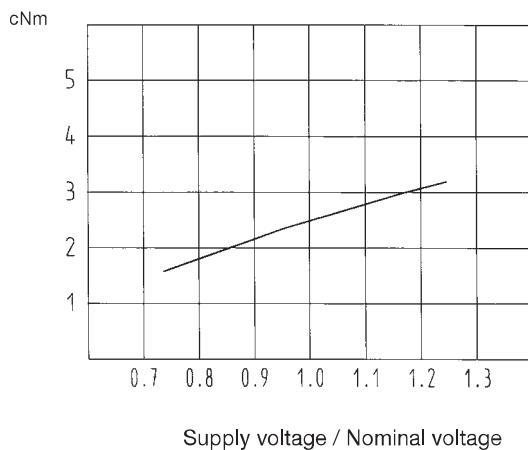

UOR1 (SM 5021 R-500/1)

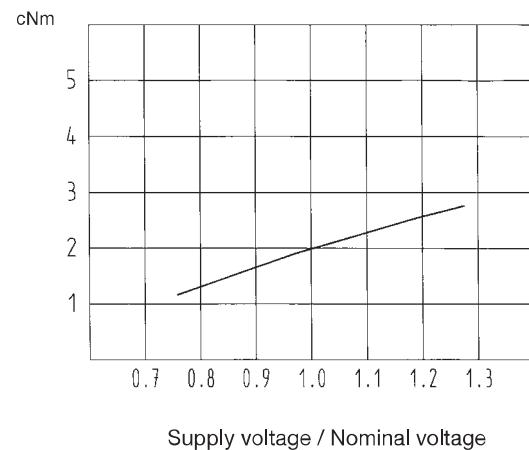

UOU1 (SM 5021 R-375/1)

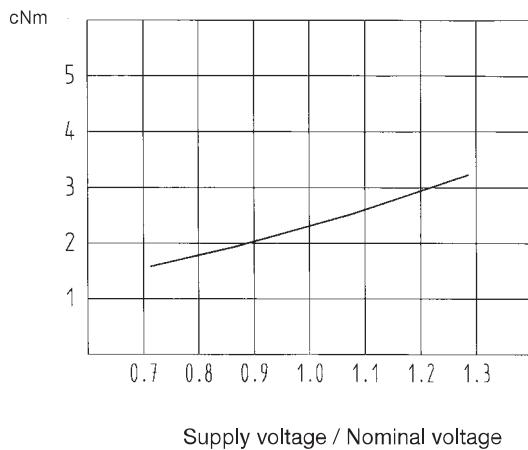

UOU1 (SM 5021 R-375/2)



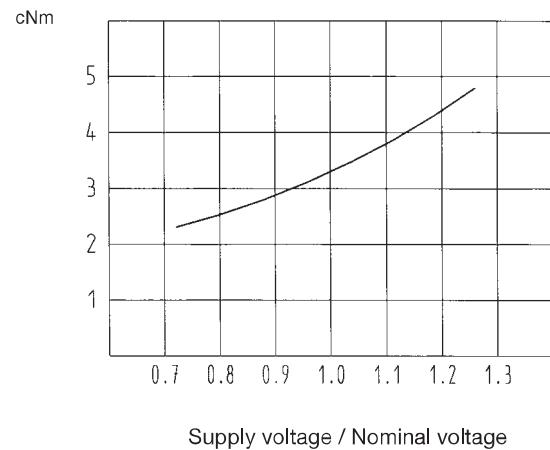


Chart: Torque versus voltage


UOM5 (SM 5022 R-250)

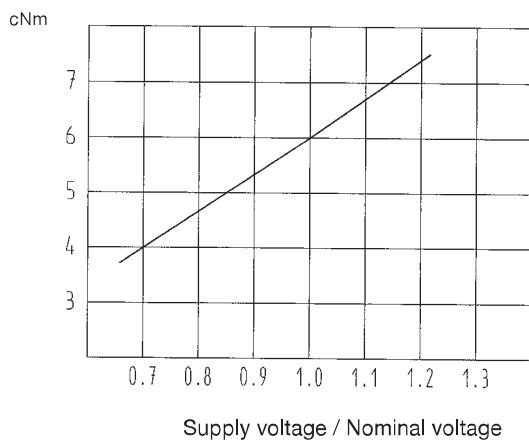


UOM5 (SM 5022 R-250/S2)

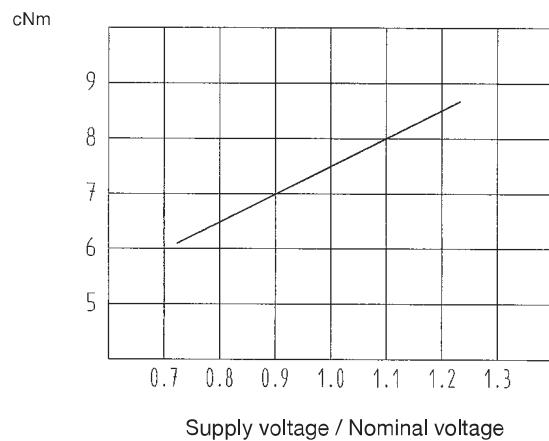


UOU5 (SM 5022 R-375)

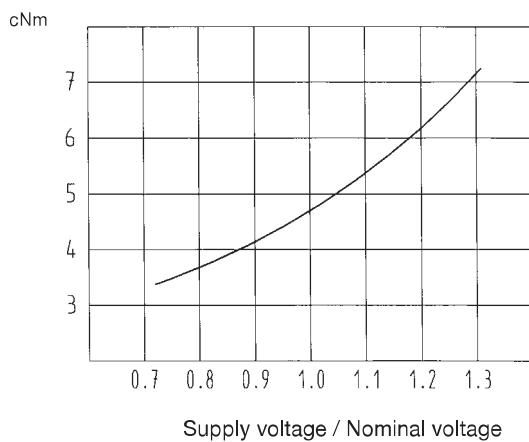


UOU5 (SM 5022 R-375/S2)

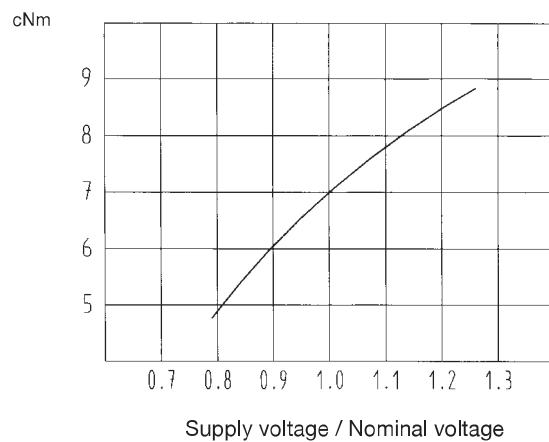

UOR5 (SM 5022 R-500)

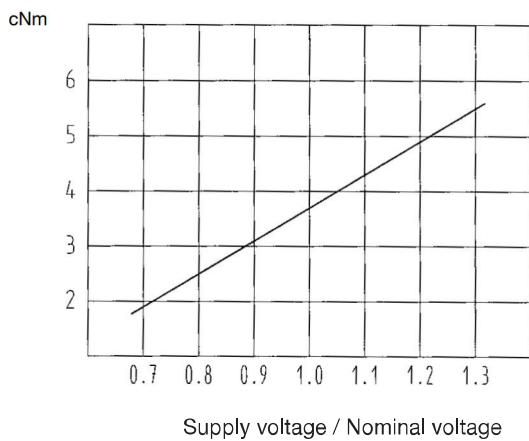

UOR5 (SM 5022 R-500/S2)

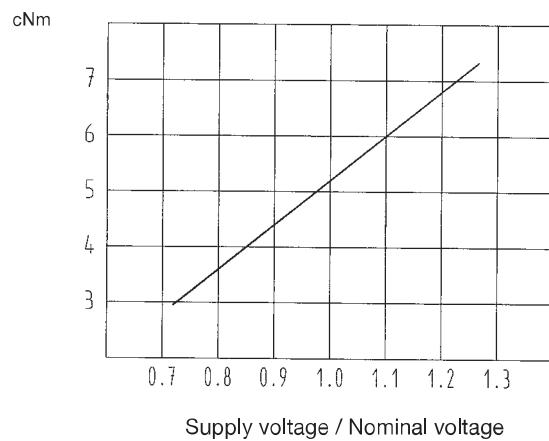

UFM

UFM1

Dimensions (mm)	$\varnothing 52 \times 28$
Voltage (V)	12–230
Speed (rpm) 50 Hz	250
60 Hz	300
Pole number	24
Running torque (cNm)	
50 Hz	3,8
60 Hz	3,5
Power output (W)	
50 Hz	1
60 Hz	1,1
Gear combination	A, D, M, B, F, V, J, O



Standard Data


Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15...+55
Ambient temperature storage	°C -20...+100
Thermal resistance at f=0 R _{therm}	13 K/W
Thermal class	A according to DIN EN 60085 (B on request)
Approval	standard (UL/CSA on request)
Mounting	any position
Electrical connection	cable
Protection	IP 30 according to DIN EN 60529
Weight	180 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	sintered bronze, self-lubricating
Electric strength	according to DIN EN 60034-1/DIN EN 60335-1

Order Reference

Type	Synchronous Motor	UFM1	0	N	24 V/50 Hz	R	N
Rotor shaft, mounting	0 centring 8 mm, shaft 3,0 mm, clip 1 centring 8 mm, shaft 2,0 mm, clip 2 centring 8 mm, shaft 1,5 mm, clip 3 centring 8 mm, shaft 3,0 mm, screw plate 4 centring 8 mm, shaft 2,0 mm, screw plate 5 centring 8 mm, shaft 1,5 mm, screw plate	E centring 10 mm, shaft 3,0 mm, screw plate K centring 10 mm, shaft 2,0 mm, screw plate M centring 10 mm, shaft 1,5 mm, screw plate					
Approval	N Approval Standard						
Voltage/Frequency	See next page						
Direction	reversible						
Cable	N cable 150 mm (other on request)						


Technical Data

Rated frequency	Hz	50	60			
Speed n	rpm	250	300			
Power consumption	W	4	3,1			
Power output	W	1	1,1			
Running torque	cNm	3,8	3,5			
Rotor inertia J _R	gcm ²	14,4				
Detent torque M _s	cNm	0,45				
Tolerance of voltage		standard power supply system + 10% / - 10%				
Duty cycle		100%				
Winding temperature T _{max}	°C	105				
Direction of rotation		reversible				
Capacitors	Rated voltage U _n	V	12	24	48	110
	Operation capacitor C ₅₀	µF/VAC	39/24	10/45	2,2/90	0,39/240
	Operation capacitor C ₆₀	µF/VAC	33/24	8,2/45	1,8/90	0,33/240
Circuit diagram	Parallel circuit					

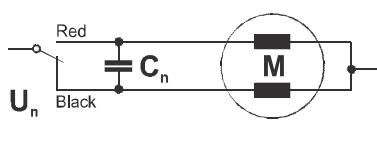

Red = clockwise rotation
Black = counter clockwise rotation

Dimensions

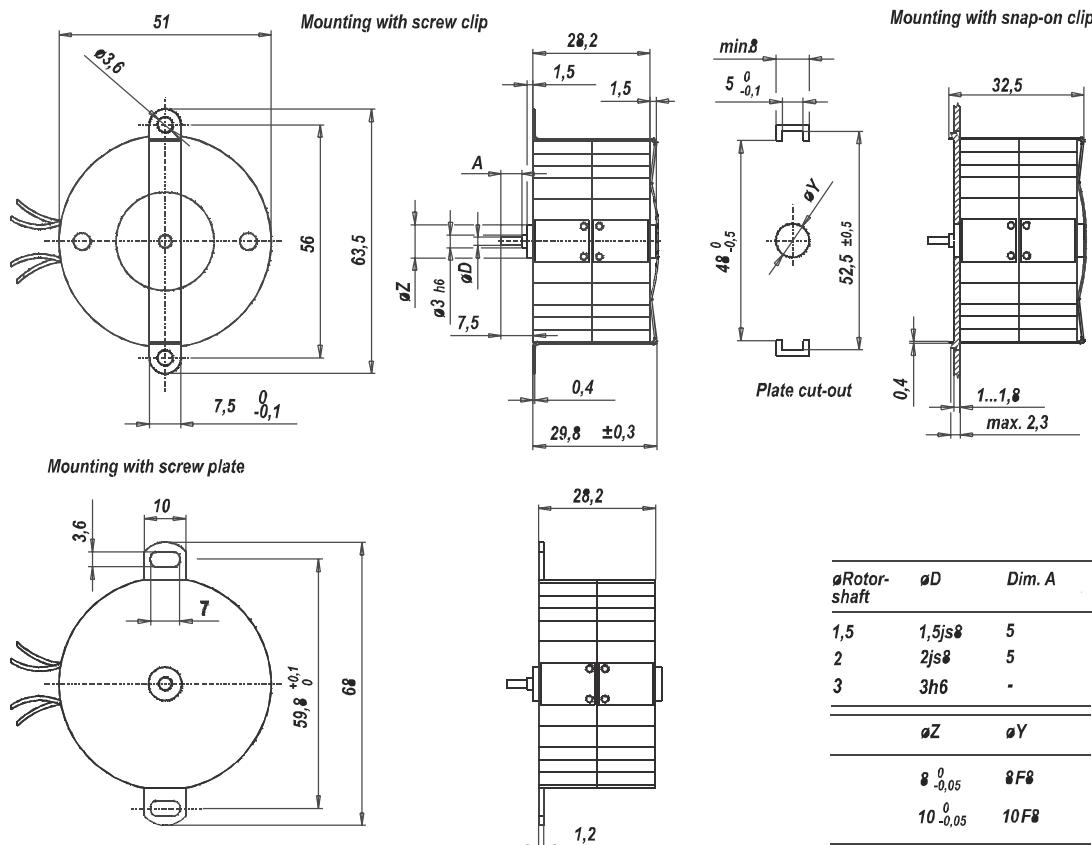

UFR

UFR1/UFR3/UFR4

Dimensions (mm)	$\varnothing 52 \times 28$ / $\varnothing 52 \times 42$ / $\varnothing 52 \times 56$
Voltage (V)	12–230
Speed (rpm) 50 Hz	500
60 Hz	600
Pole number	12
Running torque (cNm)	
50 Hz	2,8 / 3,7 / 5,3
60 Hz	2,6 / 3,1 / 4,7
Power output (W)	
50 Hz	1,5 / 1,9 / 2,8
60 Hz	1,6 / 2 / 3
Gear combination	A, D, M, B, F, V, J, O



Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	$^{\circ}\text{C}$ -15...+55
Ambient temperature storage	$^{\circ}\text{C}$ -20...+100
Thermal resistance at $f=0$ R_{therm}	11 K/W (UFR1), 7 K/W (UFR4)
Thermal class	A according to DIN EN 60085 (B on request)
Approval	standard (UL/CSA on request)
Mounting	any position
Electrical connection	cable
Protection	IP 30 according to DIN EN 60529
Weight	180 g (UFR1), 370 g (UFR4)
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	sintered bronze, self-lubricating
Electric strength	according to DIN EN 60034-1/DIN EN 60335-1

Order Reference


Type	Synchronous Motor	UFR	1	0	N	24 V/50 Hz	R	N
Configuration								
1	Two coils	A	centring 12 mm, shaft 3,0 mm, clip					
3	Three coils	E	centring 10 mm, shaft 3,0 mm, screw plate*					
4	Four coils	K	centring 10 mm, shaft 2,0 mm, screw plate*					
Rotor shaft, mounting	0 centring 8 mm, shaft 3,0 mm, clip 1 centring 8 mm, shaft 2,0 mm, clip 2 centring 8 mm, shaft 1,5 mm, clip 3 centring 8 mm, shaft 3,0 mm, screw plate* 4 centring 8 mm, shaft 2,0 mm, screw plate* 5 centring 8 mm, shaft 1,5 mm, screw plate*	M	centring 10 mm, shaft 1,5 mm, screw plate*					
Approval	N Approval Standard							
Voltage/Frequency	See next page							
Direction	reversible							
Cable	N cable 150 mm (other on request)							

* screw plate not for UFR3 and UFR4


Technical Data

UFR1	Rated frequency	Hz	50	60	
	Speed n	rpm	500	600	
	Power output P_{mech}	W	1,5	1,6	
	Running torque M_n	cNm	2,8	2,6	
	Power consumption P_{el}	W	3,3	3,6	
	Detent torque M_s	cNm	0,46		
	Rotor inertia J_R	gcm ²	14,2		
	Capacitors at Rated voltage U_N	V	24	48	110
	Operation capacitor C_{50}	μF/VAC	10/45	2,7/90	0,47/200
	Operation capacitor C_{60}	μF/VAC	8,2/45	2,2/90	0,39/200
UFR3	Rated frequency	Hz	50	60	230
	Speed n	rpm	500	600	0,12/400
	Power output P_{mech}	W	1,9	2	0,10/400
	Running torque M_n	cNm	3,7	3,1	
	Power consumption P_{el}	W	6,1	5,1	
	Detent torque M_s	cNm	0,54		
	Rotor inertia J_R	gcm ²	17		
	Capacitors at Rated voltage U_N	V	24	48	110
	Operation capacitor C_{50}	μF/VAC	39/24	10/50	1,8/110
	Operation capacitor C_{60}	μF/VAC	27/24	6,8/50	1,2/110
UFR4	Rated frequency	Hz	50	60	230
	Speed n	rpm	500	600	0,39/240
	Power output P_{mech}	W	2,8	3	0,27/240
	Running torque M_n	cNm	5,3	4,7	
	Power consumption P_{el}	W	6,4	6,9	
	Detent torque M_s	cNm	0,8		
	Rotor inertia J_R	gcm ²	24,2		
	Capacitors at Rated voltage U_N	V	24	48	110
	Operation capacitor C_{50}	μF/VAC	18/45	4,7/90	0,82/200
	Operation capacitor C_{60}	μF/VAC	15/45	3,9/90	0,68/200
	Tolerance of voltage				standard power supply system + 10% ... - 10%
	Winding temperature T_{max}				105°C
	Duty cycle				100%
	Direction of rotation				reversible


Circuit diagram UFR1 Parallel circuit

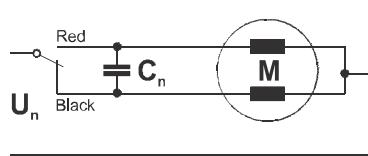

UFR3 Parallel circuit

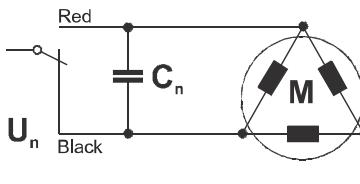


UFR4 Parallel circuit

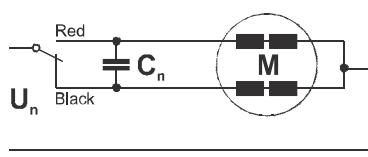


Red = clockwise rotation
Black = counter clockwise rotation

Dimensions

UFR1

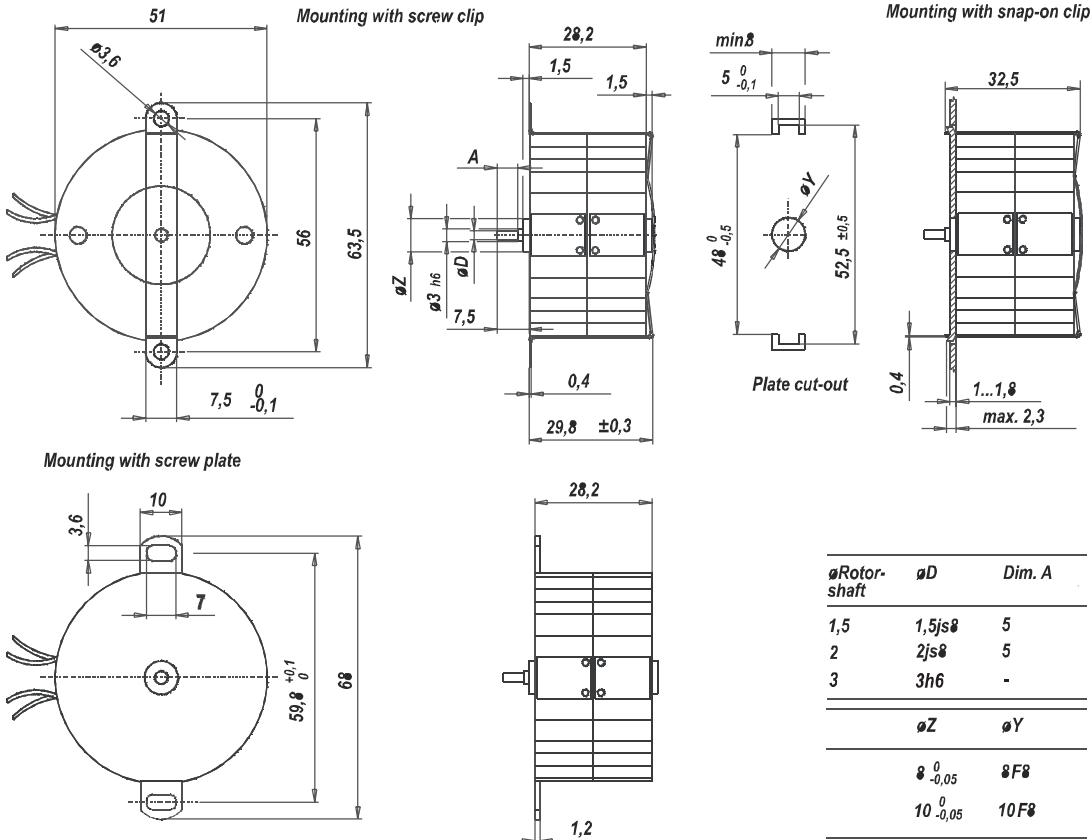


UFR3

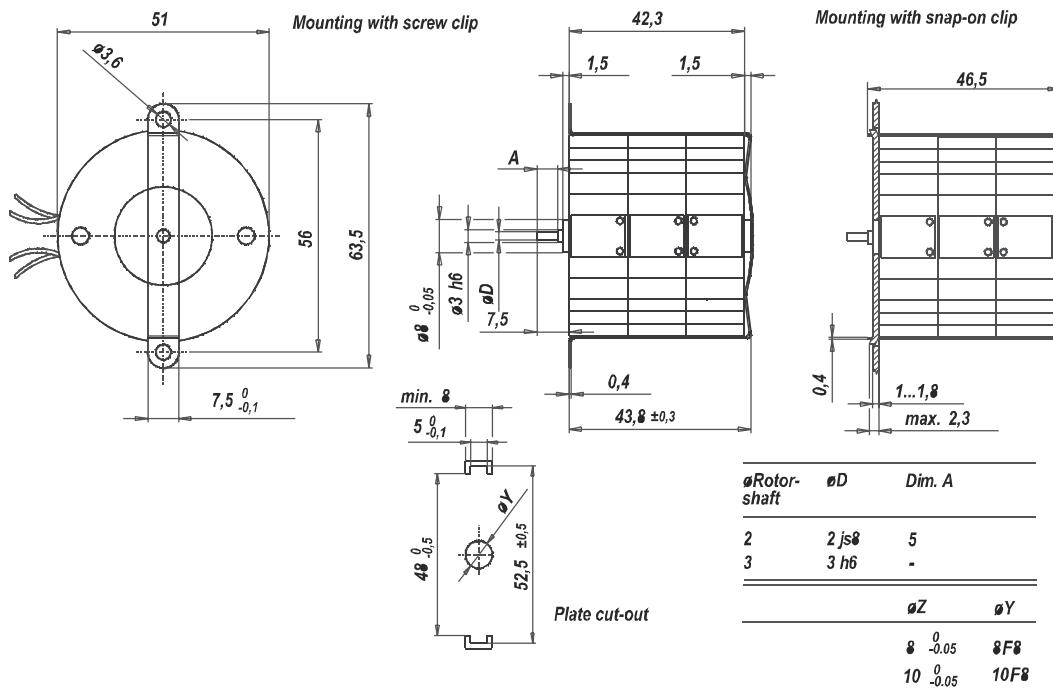

Dimensions

UFR4

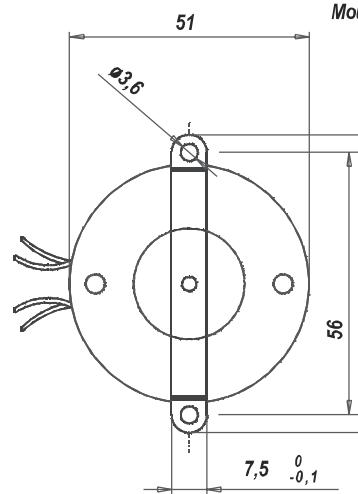

Mounting with screw clip


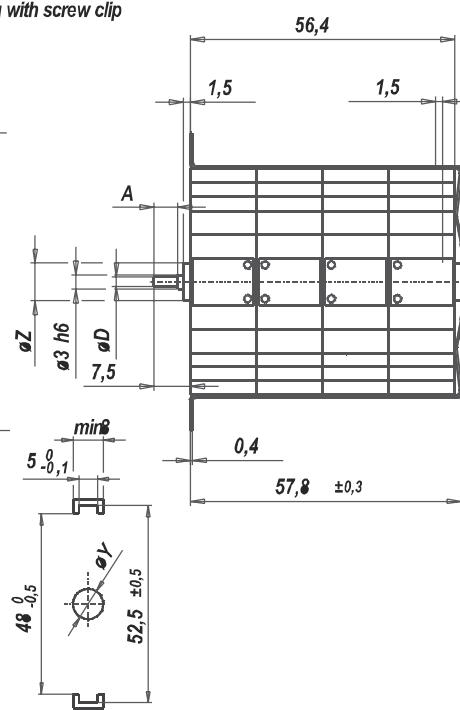


Plate cut-out

Mounting with snap-on clip

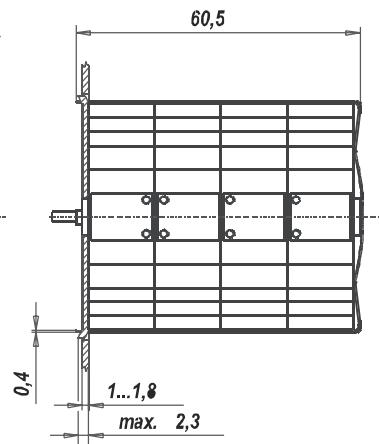

φRotor-shaft	φD	Dim. A
2	2 js8	5
3	3 h6	-
φZ	φY	
8 0 -0,05	8F8	
10 0 -0,05	10F8	

UHM

UHM1/5; UHM4/8

Dimensions (mm)	$\varnothing 59 \times 35$ / $\varnothing 59 \times 70$
Voltage (V)	12–230
Speed (rpm) 50 Hz	250
60 Hz	300
Pole number	24
Running torque (cNm)	
50 Hz	8,5–15
60 Hz	6,6–9,5
Power output (W)	
50 Hz	2,2–3,9
60 Hz	2,1–3
Gear combination	J



Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	-15 ... +55° C
Ambient temperature storage	-20 ... +100° C
Thermal resistance at f=0 (R_{therm})	10 (UHM 1/5), 6,5 (UHM 4/8) K/W
Thermal class	A according to DIN EN 60085 (B on request)
Approval	standard
Mounting	any position
Electrical connection	cable
Protection	IP 30 according to DIN EN 60529
Weight (g)	300 (UHM1/5), 580 (UHM4/8)
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	sintered bronze, self-lubricating
Electric strength	according to DIN EN 60034-1/DIN EN 60335-1


Order Reference

Type	Synchronous Motor	UHM	1	0	N	12V/50Hz	R	N
Configuration	1 two coils, standard magnet 5 two coils, stronger magnet	4 four coils, standard magnet 8 four coils, stronger magnet						
Rotor shaft, mounting	0 centring 12 mm, shaft 6,35 mm, clip ** 1 centring 12 mm, shaft 4,0 mm, clip ** 2 centring 12 mm, shaft 3,0 mm, clip **	3 centring 12 mm, shaft 6,35 mm, screw plate * 4 centring 12 mm, shaft 4,0 mm, screw plate * 5 centring 12 mm, shaft 3,0 mm, screw plate *						
Approval	N Approval Standard							
Voltage/Frequency	See next page							
Direction	reversible							
Cable	N cable 150 mm (other on request)							
	* not for UHM4/8							
	** not for UHM1/2							

Technical Data

UHM1/5	Rated frequency	Hz	50		60		
	Speed n	rpm	250		300		
	Power output P _{mech}	W	2,2 (UHM 1); 2,5 (UHM 5)		2,1 (UHM 1)		
	Running torque M _n	cNm	8,5 (UHM 1); 9,5 (UHM 5)		6,6 (UHM 1)		
	Power consumption P _{el}	W	5		4,5		
	Detent torque M _s	cNm	1,3 (UHM1); 2,1 (UHM5)				
	Rotor inertia J _R	gcm ²	49 (UHM1); 56 (UHM5)				
UHM1/5	Capacitors at Rated voltage U _n	V	12	24	48	110	230
	Operation capacitor C ₅₀ UHM1/5	µF/VAC	56/24	15/50	3,9/100	0,68/220	0,18/440
	Operation capacitor C ₆₀ UHM1/5	µF/VAC	39/24	10/50	2,7/100	0,47/220	0,12/440
UHM4/8	Rated frequency	Hz	50		60		
	Speed n	rpm	250		300		
	Power output P _{mech}	W	3,9 (UHM4); 3,9 (UHM8)		3,0 (UHM4)		
	Running torque M _n	cNm	15 (UHM4)		9,5 (UHM4); 14,7 (UHM8)		
	Power consumption P _{el}	W	10 (UHM4)		9,0 (UHM4)		
	Detent torque M _s	cNm	3,4 (UHM4); 5,3 (UHM8)				
	Rotor inertia J _R	gcm ²	135 (UHM4); 141 (UHM8)				
UHM4/8	Capacitors at Rated voltage U _n	V	12	24	48	110	230
	Operation capacitor C ₅₀ UHM4/8	µF/VAC	100/24	27/50	6,8/100	1,2/220	0,33/440
	Operation capacitor C ₆₀ UHM4/8	µF/VAC	47/24	15/50	4,7/100	0,82/220	0,15/440
Tolerance of voltage		standard power supply system + 10% ... -10%					
Winding temperature T _{max}		105°C					
Duty cycle		100%					
Direction of rotation		reversible					



Circuit diagram Parallel circuit

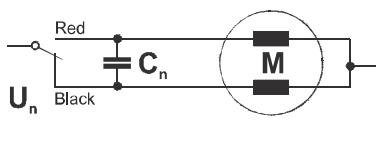



Red = clockwise rotation
Black = counter clockwise rotation

Dimensions

UHM1/5

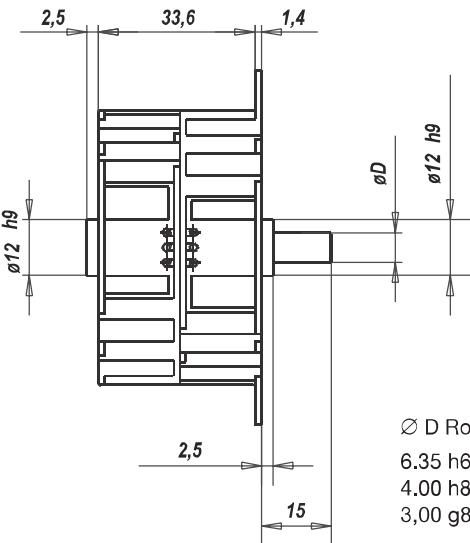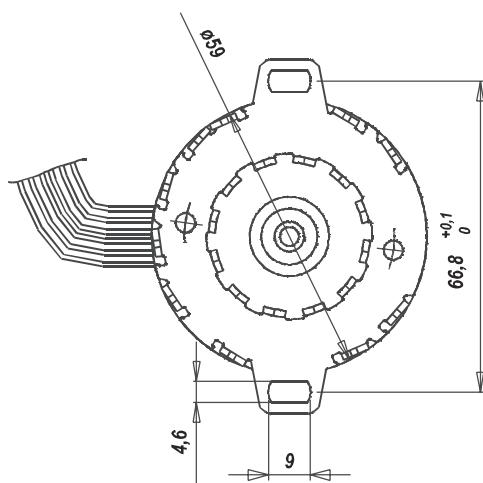

UHM4/8

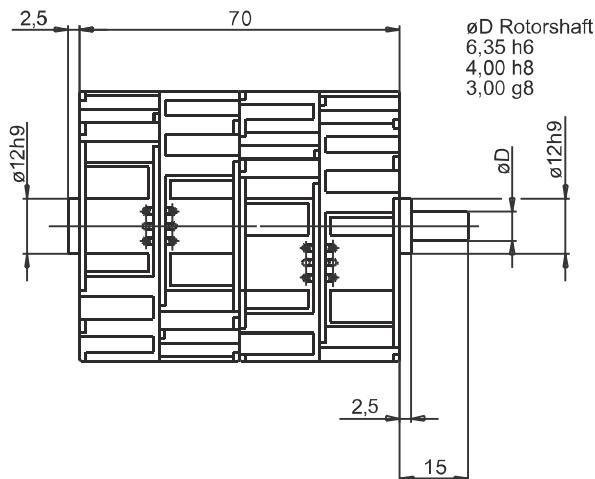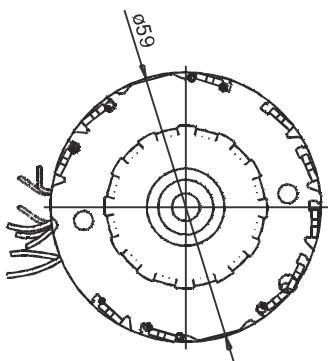

UP (SM6443; SM6444)

Dimensions (mm)	\varnothing 64 x 34
Voltage (V)	12–230
Speed (rpm) 50 Hz	250/375 (SM6443); 375 (SM6444)
60 Hz	300/450 (SM6443); 450 (SM6444)
Pole number	24/16 (SM6443); 16 (SM6444)
Running torque (cNm) 50 Hz	10,3–18,5 (SM6443); 28–35 (SM6444)
60 Hz	8,5–17 (SM6443); 21–30 (SM6444)
Power output (W)	
50 Hz	3,5–7,3 (SM6443); 11–13,8 (SM6444)
60 Hz	3,9–8,0 (SM6443); 9,9–14,2 (SM6444)
Gear combination	O, P, R

**Standard Data**

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15 ... +40
Ambient temperature storage	°C -20 ... +100
Thermal class	B (SM6443) ; A (SM6444) according to DIN EN 60085
Approval	standard
Mounting	any position
Electrical connection	cable
Protection	IP 30 according to DIN EN 60529
Weight	500 g (SM6443); 550 g (SM6444)
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	Sintered bronze, self-lubricating


Order Reference

Type	Synchronous Motor	SM6443 R / SM6444	250	24 V	50 Hz
rpm	250 (SM6443 R) 375 (SM6443 R / SM6444 R)				
Voltage	24 V 110 V 230 V				
Frequency	50 Hz 60 Hz 50/60 Hz				


Technical Data

		R-250/1	R-250/1	R-375/1	R-375/1	R-375/2	R-375/2	R-375/S2/1	R-375/S2/1
Motor type (SM6443)	Rated frequency	Hz	50	60	50	60	50	50	60
	Speed	rpm	250	300	375	450	375	450	375
	Running torque M_n	cNm	13.5	12.5	12	10.5	10.5	8.5	18.5
	Power output	W	3.54	3.94	4.7	4.95	4.13	4	7.3
	Power consumption	VA	10.3	11.3	11.7	12.65	9.55	9.7	18
	Nominal current at 230 V	mA	44.5	49	51	55	41.5	42	78.2
	Max. permissible ext. inertia	gcm ²	200	130	100	50	80	40	130
	Detent torque M_s	cNm	2.5	2.5	1.8	1.8	1.8	1.8	2
	Winding temperature increase	K	85	90	95	100	80	80	90 (S2 60 min.)
	Weight	g	500	500	500	500	500	500	500
Capacitors	at U_N : 24 V	$\mu\text{F}/\text{V}\sim$	25.8/63	25.8/63	30/63	30/63	25.8/63	25.8/63	47/63
	at U_N : 110 V	$\mu\text{F}/\text{V}\sim$	1.3/250	1.3/250	1.3/250	1.3/250	1.3/250	1.3/250	2.2/250
	at U_N : 230 V	$\mu\text{F}/\text{V}\sim$	0,27/500	0,27/500	0,33/500	0,33/500	0,27/500	0,27/500	0,47/500
Motor type (SM6444)				R-375/S2/1		R-375/S2/1		R-375/S2/2	
	Rated frequency	Hz	50		60		50		60
	Speed	rpm	375		450		375		450
	Running torque M_n	cNm	28		21		35		30
	Power output	W	11		9.9		13.8		14.2
	Power consumption	VA	26		28		31		33.5
	Nominal current at 230 V	mA	113		122		135		145
	Max. permissible external inertia	gcm ²	500		350		600		400
	Detent torque M_s	cNm	7		7		7		7
	Winding temperature increase	K	85 (S2 6,5 min)		85 (S2 6,5 min)		95 (S2 5 min.)		95 (S2 5 min.)
	Weight	g	550		550		550		550
Capacitors	at U_N : 24 V	$\mu\text{F}/\text{V}\sim$	68 / 63		68 / 63		82 / 63		82 / 63
	at U_N : 110 V	$\mu\text{F}/\text{V}\sim$	2.7 / 250		2.7 / 250		3.3 / 250		3.3 / 250
	at U_N : 230 V	$\mu\text{F}/\text{V}\sim$	0.68 / 500		0.68 / 500		0.82 / 500		0.82 / 500

Circuit diagram Parallel circuit

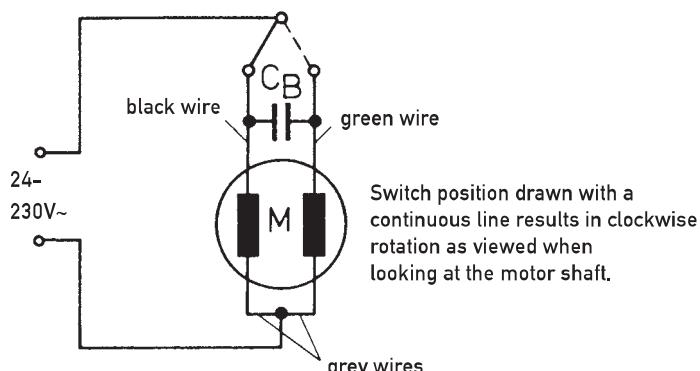

Dimensions

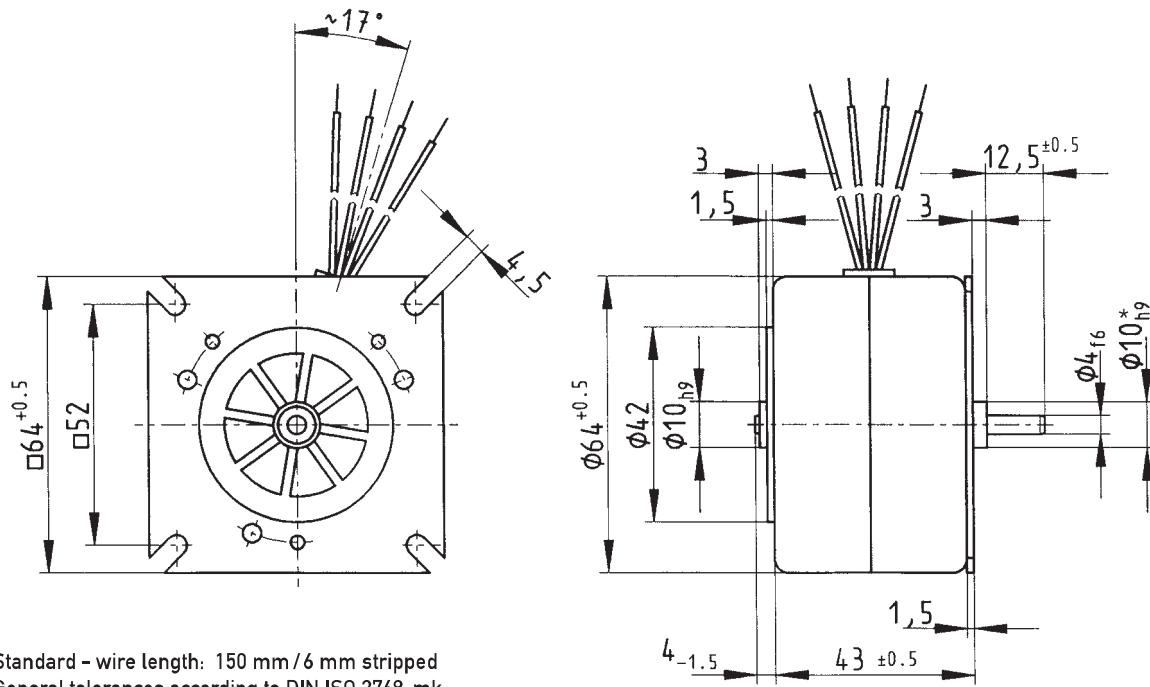


Standard - wire length: 150 mm / 6 mm stripped
General tolerances according to DIN ISO 2768-mk


* on request 14h9

Chart: Torque versus voltage


UPM1 (SM 6443 R-250/1)

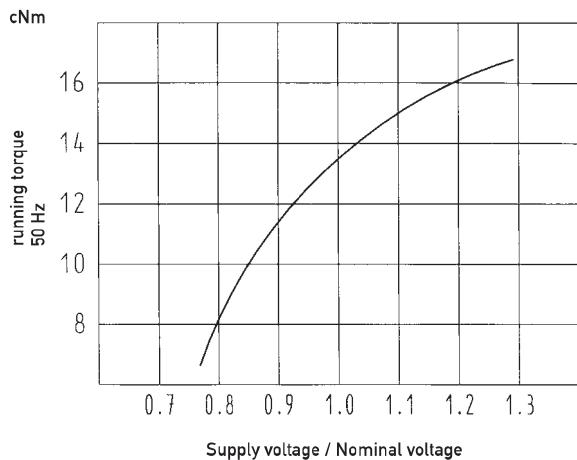

UPU1 (SM 6443 R-375/1)

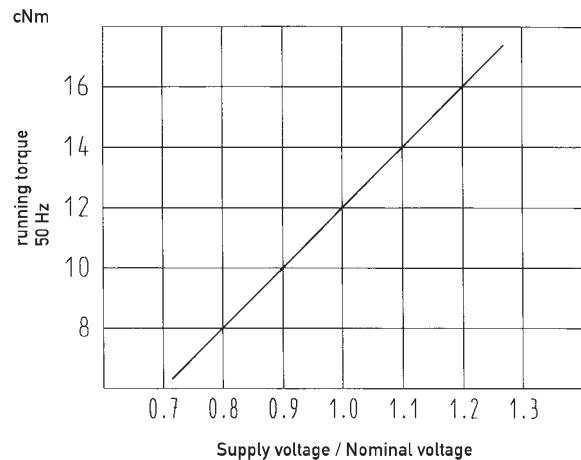

UPU1 (SM 6443 R-375/2)

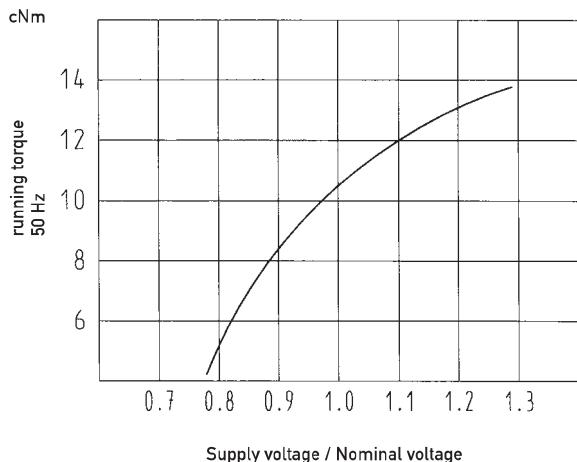

UPU1 (SM 6443 R-375/S2/1)


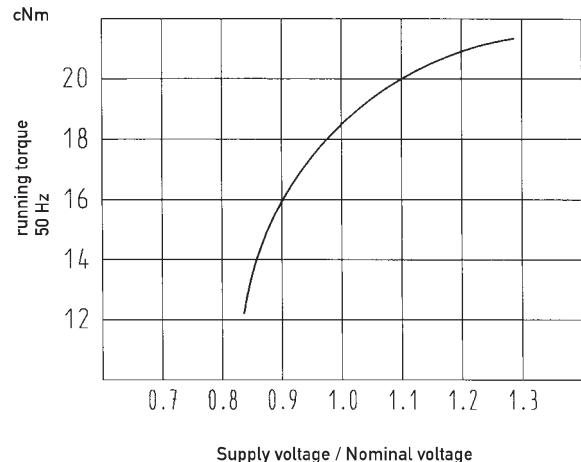


Chart: Possible duty cycle versus torque

UPU5 (SM 6444 R-375/S2/1)

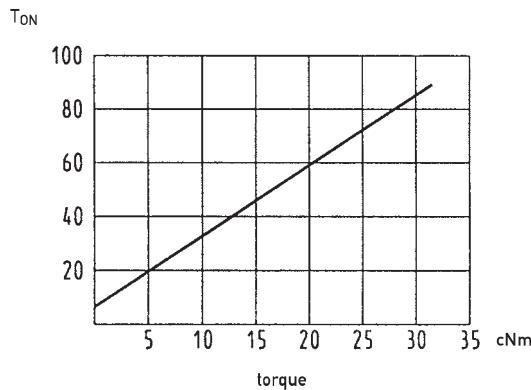

UPU5 (SM 6444 R-375/S2/2)



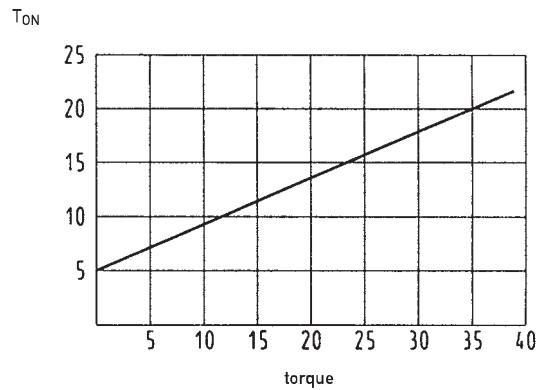


Chart: Torque versus voltage

UPU5 (SM 6444 R-375/S2/1)

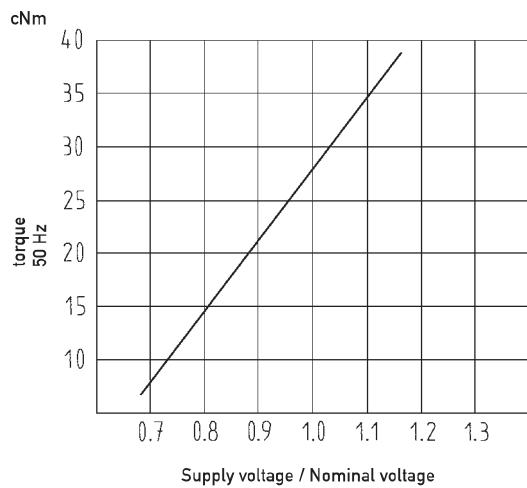

UPU5 (SM 6444 R-375/S2/2)

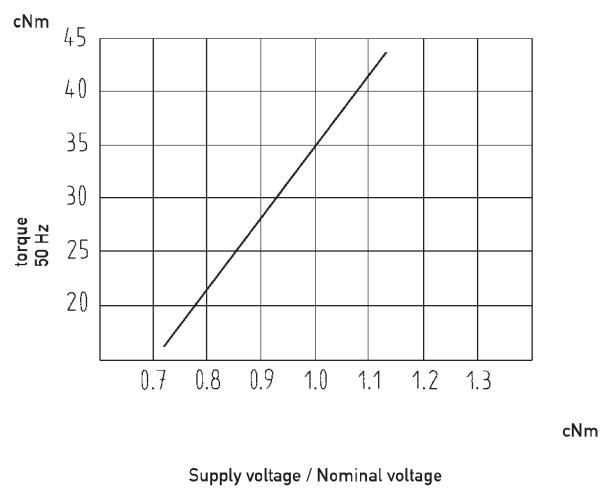

UNU0

UNU0 (SM 3532 RG)

Dimensions (mm)	$\varnothing 35 \times 32$
Voltage (V)	24–230
Speed (rpm) 50 Hz	375
60 Hz	450
Pole number	16
Stalled limited torque (cNm)	
50 Hz	0,6
60 Hz	0,6
Power output (W)	
50 Hz	0,25
60 Hz	0,3
Gear combination	O, P, R



Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15 ... +40
Ambient temperature storage	°C -20 ... +100
Thermal class	B according to DIN EN 60085
Approval	standard
Mounting	any position
Electrical connection	cable
Protection	IP 30 according to DIN EN 60529
Weight	100 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	Sintered bronze, self-lubricating


Order Reference

Type	Synchronous Motor	SM 3532 RG 375	24 V	50 Hz
Voltage	24 V 110 V 230 V			
Frequency	50 Hz 60 Hz			


Technical Data

Rated frequency	Hz	50	60
Speed of rotation	rpm	375	450
Stalled limited torque	cNm	0,6 +/-15%	0,6 +/-15% (see chart next page)
Power output	W	0,25	0,3
Power consumption	VA	2,65	2,75
Nominal current at 230 V	mA	11,5	12
Detent torque M_s	cNm	0,1	0,1
Winding temperature increase	K	45	50
<hr/>			
Capacitors at U_N : 24 V	$\mu\text{F}/\text{V}\sim$	4,7/63	4,7/63
at U_N : 110 V	$\mu\text{F}/\text{V}\sim$	0,22/250	0,22/250
at U_N : 230 V	$\mu\text{F}/\text{V}\sim$	0,068/500	0,068/500

Circuit diagram Parallel circuit

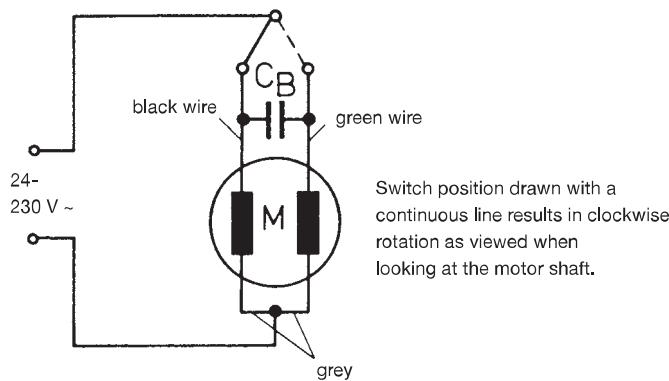


Dimensions

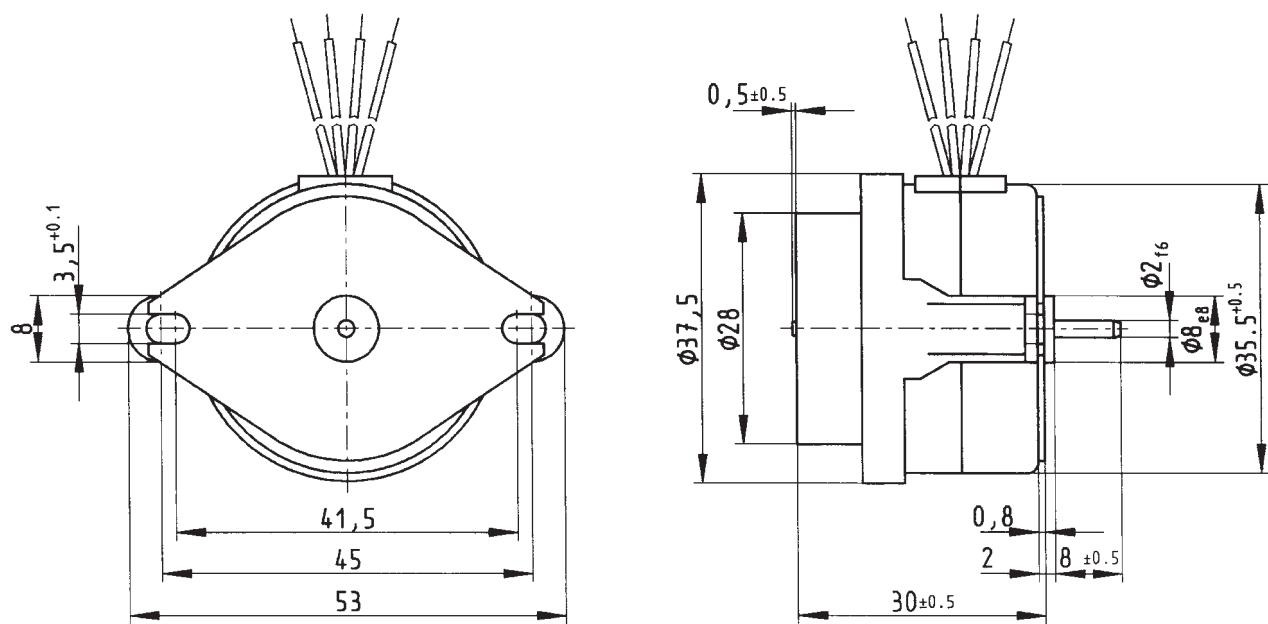

Standard - wire length: 100 mm / 6 mm stripped
General tolerances acc. to DIN ISO 2768-mk

Chart: Torque limit versus motor temperature

UNU0 (SM 3532 RG-375)

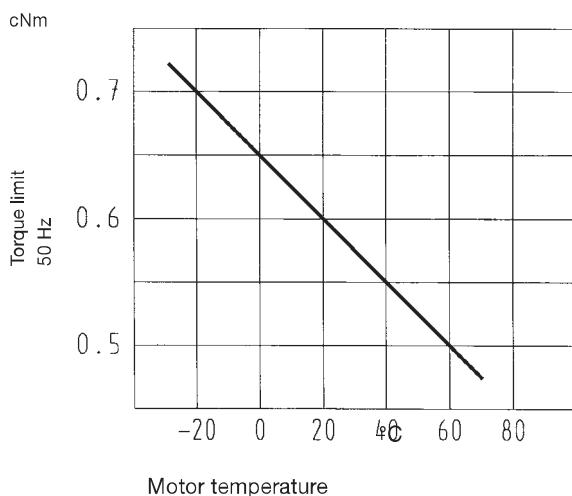

UOU0

UOU0 (SM 5032 RG)

Dimensions (mm)	\varnothing 50 x 32
Voltage (V)	24–230
Speed (rpm) 50 Hz	375
60 Hz	450
Pole number	16
Stalled limited torque (cNm)	
50 Hz	2
60 Hz	2
Power output (W)	
50 Hz	0,8
60 Hz	0,95
Gear combination	O, P, R



Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15 ... +40
Ambient temperature storage	°C -20 ... +100
Thermal class	B according to DIN EN 60085
Approval	standard
Mounting	any position
Electrical connection	cable
Protection	IP 30 according to DIN EN 60529
Weight	190 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	Sintered bronze, self-lubricating


Order Reference

Type	Synchronous Motor		
Voltage	24 V	110 V	24 V
	110 V	230 V	50 Hz
Frequency	50 Hz	60 Hz	50 Hz

Technical Data



Rated frequency	Hz	50	60
Speed of rotation	rpm	375	450
Stalled limited torque	cNm	2 +10/-15%	2 +10/-15% (see chart next page)
Power output	W	0,8	0,95
Power consumption	VA	4,1	5,3
Nominal current at 230 V	mA	18	23
Detent torque M_s	cNm	0,3	0,3
Winding temperature increase	K	55	70
<hr/>			
Capacitors at U_N : 24 V	$\mu\text{F}/\text{V}\sim$	10/63	10/63
at U_N : 110 V	$\mu\text{F}/\text{V}\sim$	0,47/250	0,47/250
at U_N : 230 V	$\mu\text{F}/\text{V}\sim$	0,12/500	0,12/500

Circuit diagram Parallel circuit

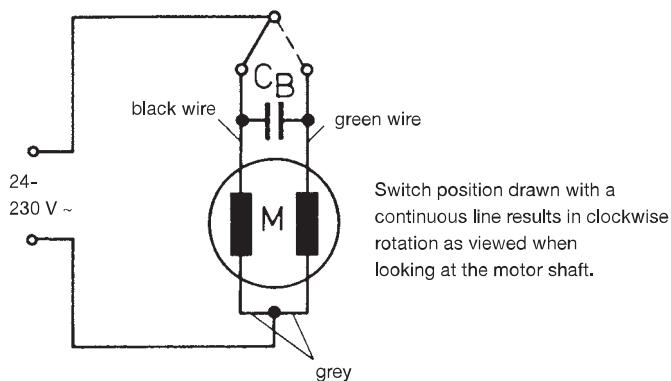


UOU0

Dimensions

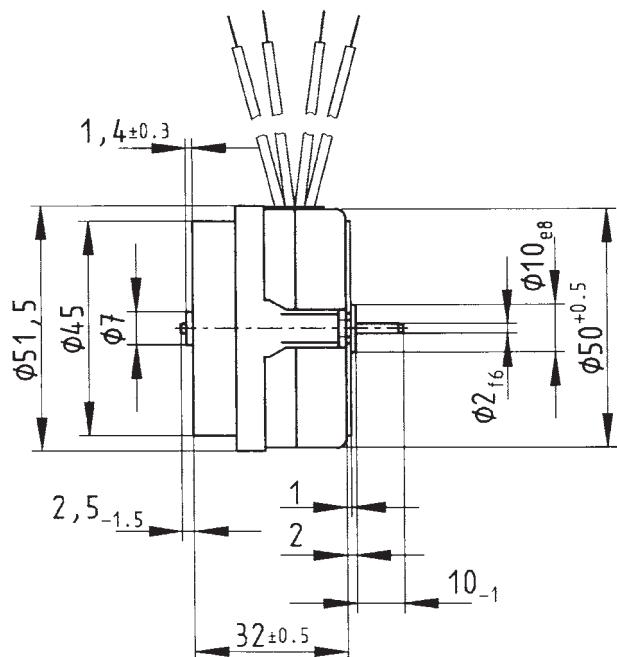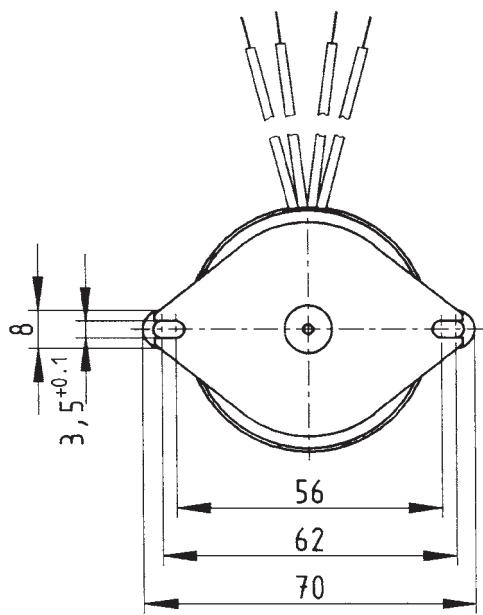

Standard - wire length: 200 mm / 4 mm stripped
General tolerances acc. to DIN ISO 2768-mk

Chart: Torque limit versus motor temperature

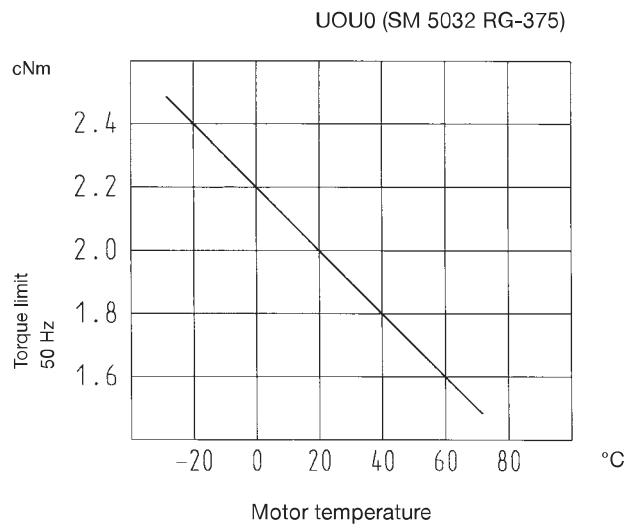

UPU0

UPU0 (SM6469RG)

Dimensions (mm)	\varnothing 64 x 69
Voltage (V)	24–230
Speed (rpm) 50 Hz	375
60 Hz	450
Pole number	16
Stalled limited torque (cNm)	
50 Hz	7
60 Hz	7
Power output (W)	
50 Hz	2,75
60 Hz	3,3
Gear combination	O, P, R



Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15 ... +40
Ambient temperature storage	°C -20 ... +100
Thermal class	B according to DIN EN 60085
Approval	standard
Mounting	any position
Electrical connection	cable
Protection	IP 30 according to DIN EN 60529
Weight	600 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	Sintered bronze, self-lubricating


Order Reference

Type	Synchronous Motor	SM6469RG 375	24 V	50 Hz
Voltage	24 V 110 V 230 V			
Frequency	50 Hz 60 Hz			

Technical Data


Rated frequency	Hz	50	60
Speed of rotation	rpm	375	450
Stalled limited torque	cNm	7 +/-10%	7 +/-10% (see chart next page)
Power output	W	2,75	3,3
Power consumption	VA	10,5	13,5
Nominal current at 230 V	mA	46	59
Detent torque M_s	cNm	3	3
Winding temperature increase	K	70	90
<hr/>			
Capacitors at U_N : 24 V	$\mu\text{F}/\text{V}\sim$	30/63	30/63
at U_N : 110 V	$\mu\text{F}/\text{V}\sim$	1,3/250	1,3/250
at U_N : 230 V	$\mu\text{F}/\text{V}\sim$	0,33/500	0,33/500

Circuit diagram Parallel circuit

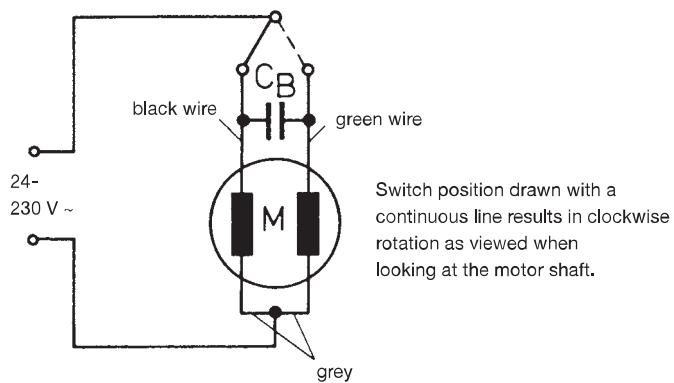

UPU0

Dimensions

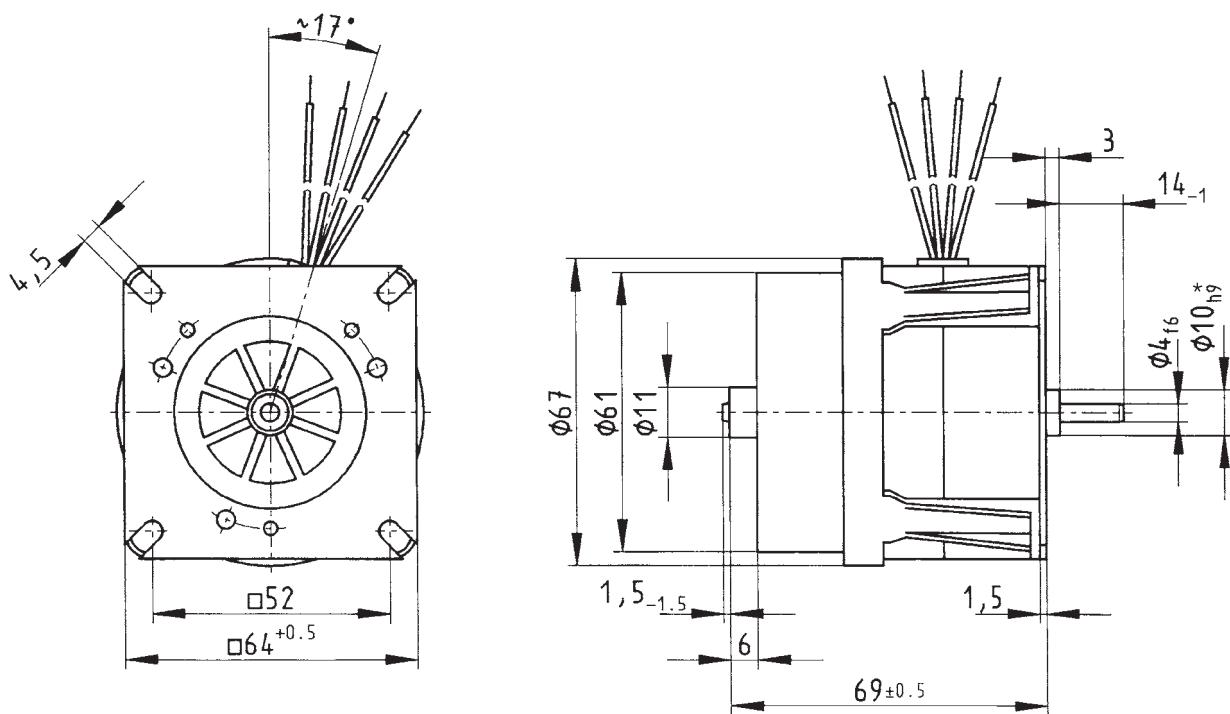


Standard - wire length: 150 mm / 6 mm stripped
General tolerances according to DIN ISO 2768-mk


* on request 14h9

Chart: Torque limit versus motor temperature

UPU0 (SM 6469 RG-375)
cNm

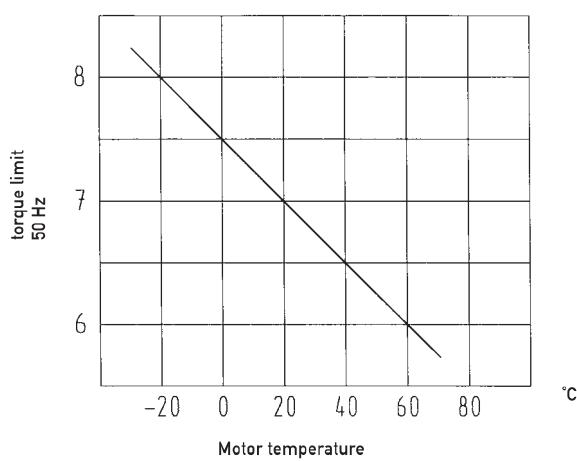

Stepper Motors

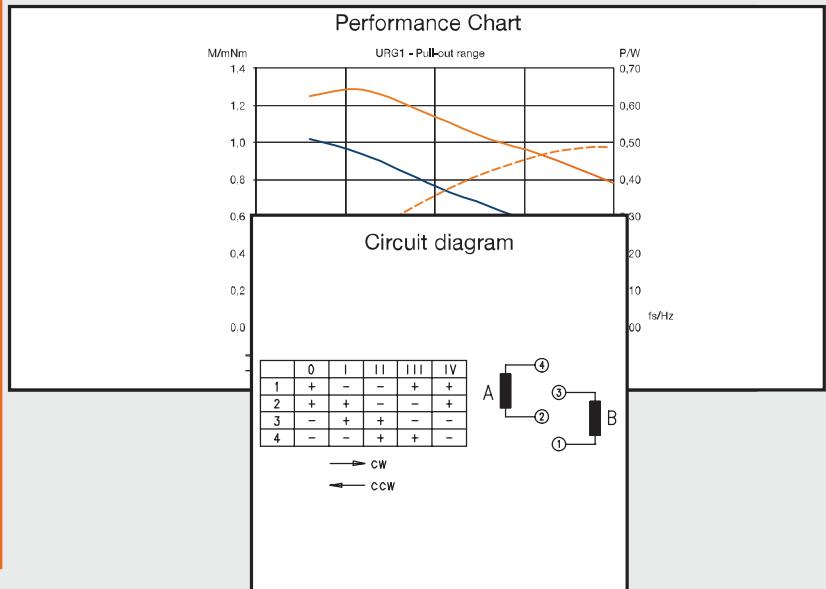

 JOHNSON
ELECTRIC

innovating motion

www.contact-evolution.com

URG

Dimensions (mm)	$\varnothing 13 \times 11$
Step angle (°)	18
Holding torque *	
(mNm)	2,0
Detent torque (mNm)	0,3
Winding	bipolar
Gear combination	—

* winding for duty cycle 30 %, standard magnet



Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15 ... +60
Ambient temperature storage	°C -20 ... +100
Thermal resistance at f=0 R _{therm}	83 K/W
Thermal class	B according to DIN EN 60085
Approval	standard
Mounting	any position
Electrical connection	Pin, optional flex print
Protection	IP 40 according to DIN EN 60529
Weight	7 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	integrated high temperature plastic bearing

Order Reference

Type	Stepper Motor	URG	1E	N	6 Ω	R	C
Configuration	1E bipolar, standard magnet						
Approval	N						
Resistance	see next page						
Direction	R reversible						
Connector	N Pin C flex print						

This motor type doesn't fulfil basis insulation requirements of EN 60335-1: 2004
 Customer application must realize a suitable protection class.

Technical Data

bipolar	Rated voltage U_N	V	3	6	12
	Resistance per winding R_{20}	Ω	6	26	102
	Holding torque M_H	mNm	2,5		
	Detent torque M_S	mNm	0,3		
	Rotor inertia J_R	gcm^2	0,033		
	Steps per revolution		20		
	Duty cycle		30 %		
	Direction of rotation		reversible		

Dimensions


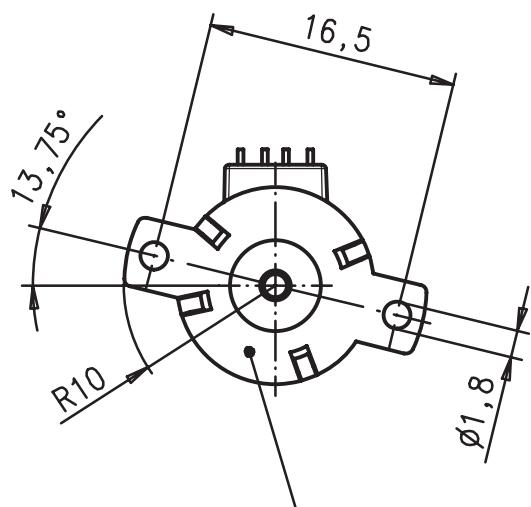


plate modification
customer- specified possible


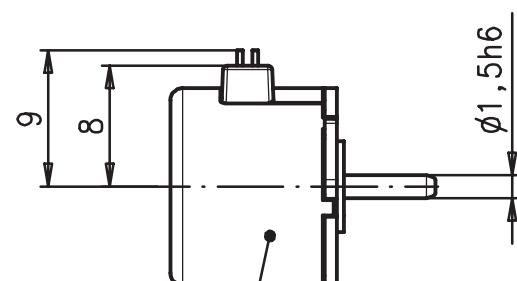


version with pin connection N


	0	I	II	III	IV
1	+	-	-	+	+
2	+	+	-	-	+
3	-	+	+	-	-
4	-	-	+	+	-

→ clockwise rotation


← counter clockwise rotation

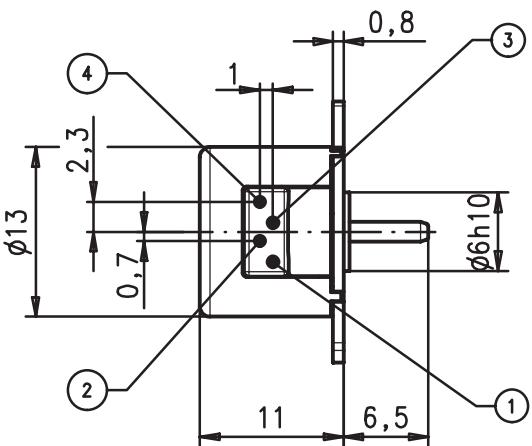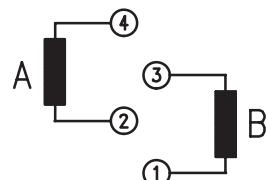

Dimensions

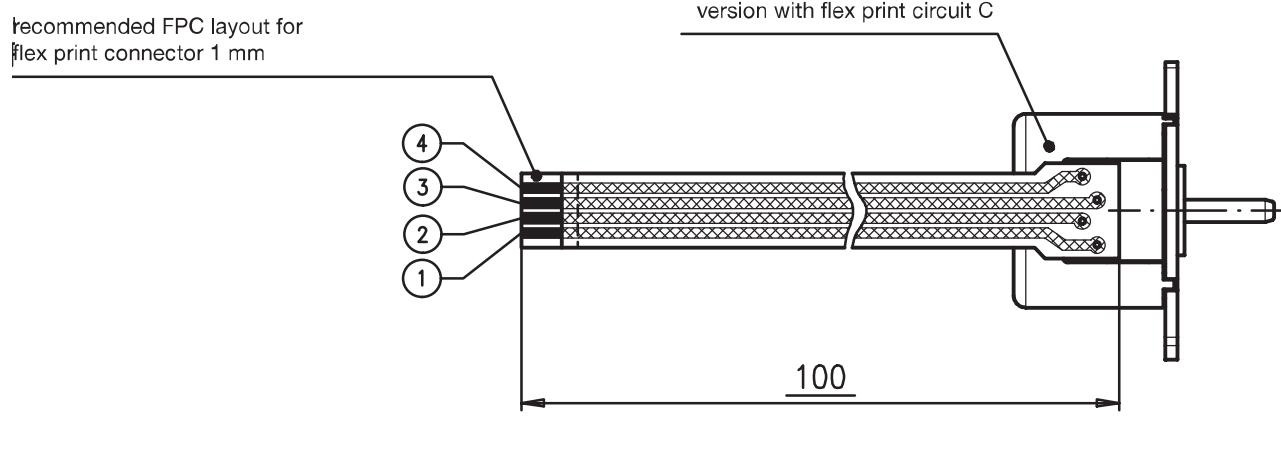

Performance Chart

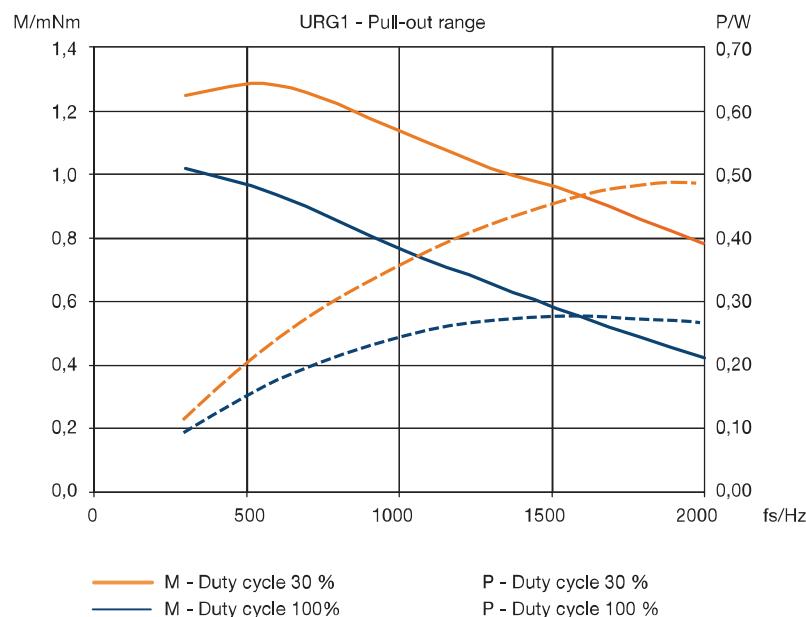

UAG1/2

UAG1/2

Dimensions (mm)	$\varnothing 20 \times 17,2$
Step angle (°)	18
Holding torque (cNm)	0,7 / 0,5
Detent torque (cNm)	0,14
Winding	bipolar/unipolar
Gear combination	on request



Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -40...+60
Ambient temperature storage	°C -40...+100
Thermal resistance at f=0 R_{therm}	50 K/W
Thermal class	B according to DIN EN 60085
Approval	standard
Mounting	any position
Electrical connection	insulation displacement connection, pins, lead wires
Protection	IP 40 according to DIN EN 60529
Weight	25 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	sintered bronze, self-lubricating


Order Reference

Type	Stepper Motor	UAG	1	0	N	27(Ω)	R	E
Configuration	1 bipolar 2 unipolar							
Rotor shaft, mounting	0 centring 8 mm, mounting plate with screw M2 3 centring 8 mm, mounting plate with long holes A centring 6 mm, mounting plate with screw M2 E centring 6 mm, mounting plate with long holes							
Approval	N Approval Standard							
Resistance	See next page Resistance per winding for bipolar or unipolar.							
Direction	reversible							
Cable	E Lead wires 150 mm with plug AMP MicroMatch 0-215083-6 (other on request)							


Technical Data

bipolar (UAG1)	Rated voltage U_N	V	6	12	24
	Resistance per winding	R_{20}	27	150	675
unipolar (UAG2)	Rated voltage U_N	V	6	12	24
	Resistance per winding R_{20}	Ω	35	170	700
	Steps per revolution		20		
	Duty cycle		100%		
	Winding temperature T_{max}		130° C		
	Rotor inertia J_R		0,31 gcm ²		
	Holding torque M_H		0,7 cNm (UAG1) 0,5 cNm (UAG2)		
	Detent torque M_D		0,14 cNm		
	Direction of rotation		reversible		

Dimensions

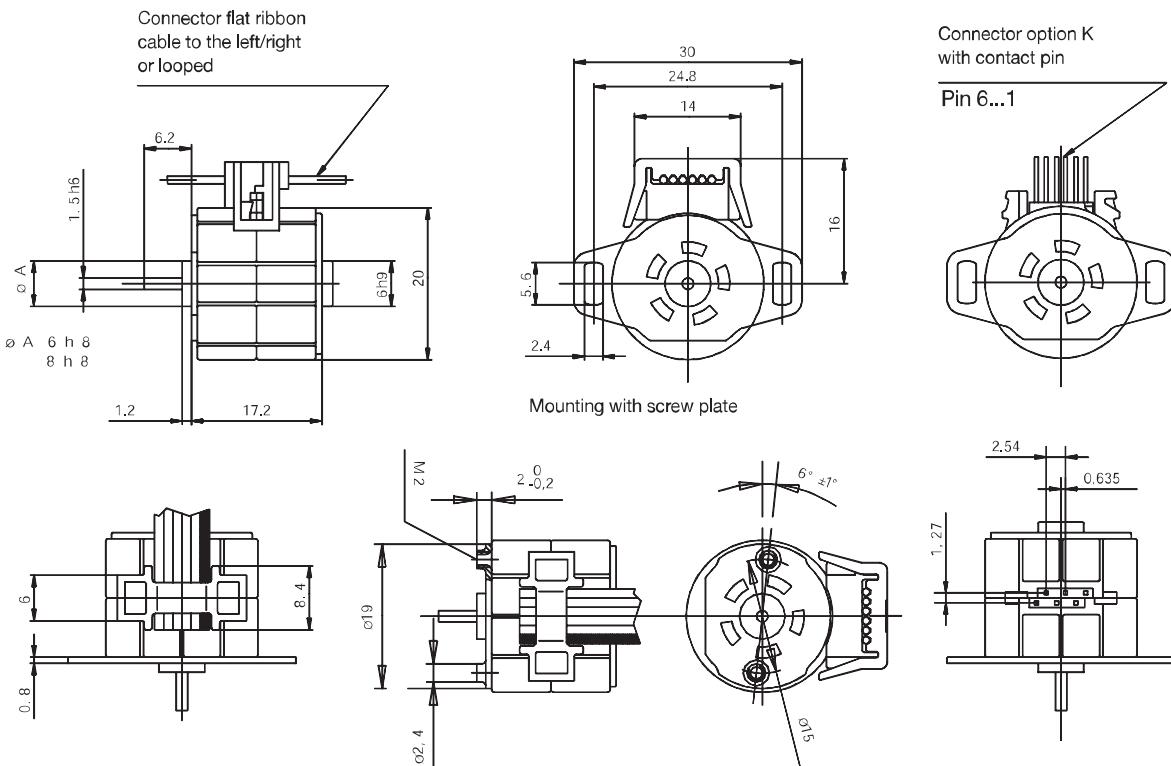

Performance Chart

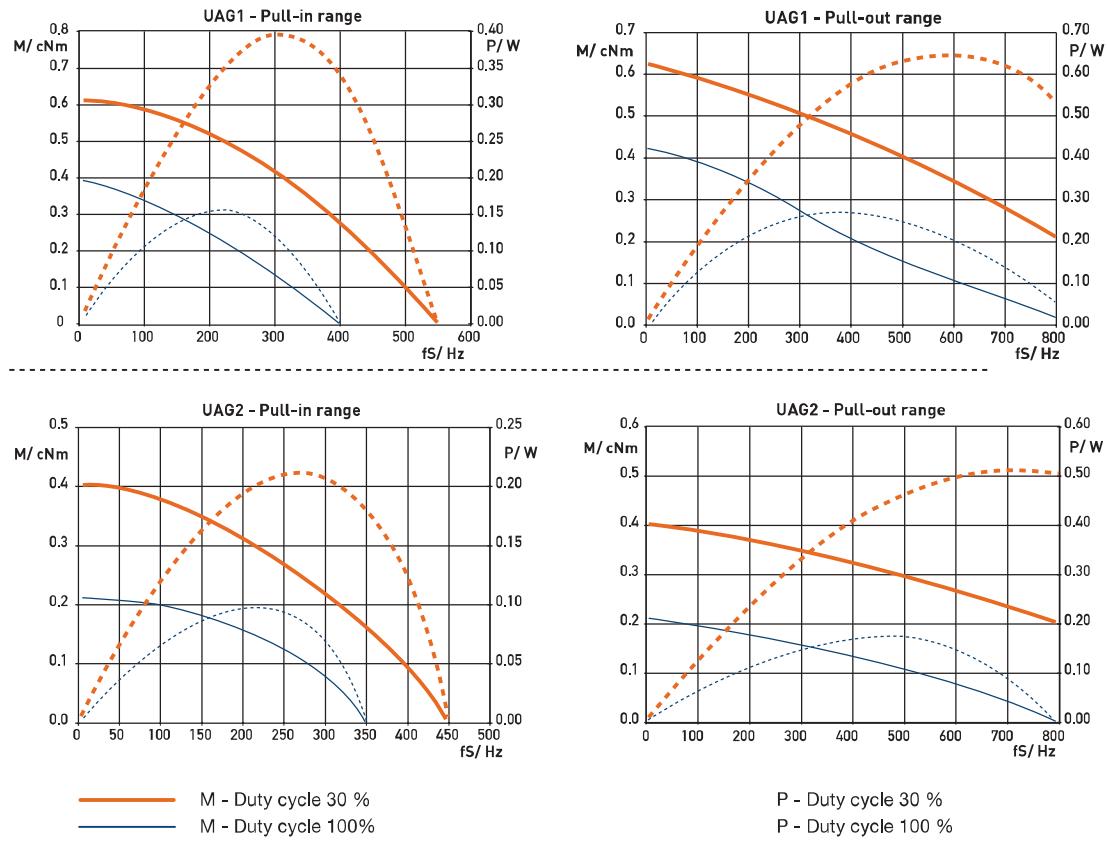

UAG3/4

UAG3/4

Dimensions (mm)	Ø 20 x 17
Step angle (°)	18
Holding torque (mNm)	5,6 / 4,2
Detent torque (mNm)	> 0,6
	bipoar/unipolar
Winding	on request
Gear combination	



Rotational

Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -20...+60
Ambient temperature storage	°C -40...+100
Thermal resistance at f=0 R _{therm}	47 K/W
Thermal class	B according to DIN EN 60085
Approval	standard
Mounting	any position
Electrical connection	cable
Protection	IP 40 according to DIN EN 60529
Weight	22 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	sintered bronze, self-lubricating

Order Reference

Type	Stepper Motor	UAG	3	3	N	150 (Ω)	Ω	R	E
Configuration	3 bipolar 4 unipolar								
Rotor shaft, mounting	3 centring 8 mm, mounting plate with long holes 5 centring 8 mm, mounting plate (for clipping) E centring 6 mm, mounting plate with long holes G centring 6 mm, mounting plate (for clipping)								
Approval	N Approval Standard								
Resistance	See next page Resistance per winding for bipolar or unipolar.								
Direction	reversible								
Cable	E cable 150 mm with Tyco connector CT 173977-4 1-6 (other on request)								






Technical Data

bipolar (UAG3)	Rated voltage U_N	V	12
	Resistance per winding R_{20}	Ω	150
unipolar (UAG4)	Rated voltage U_N	V	12
	Resistance per winding R_{20}	Ω	150
Steps per revolution	20		
Duty cycle	100%		
Winding temperature T_{max}	130° C		
Rotor inertia J_R	0,26 gcm ²		
Holding torque M_H	0,56 cNm (UAG3) 0,42 cNm (UAG4)		
Detent torque M_H	> 0,6 mNm		
Direction of rotation	reversible		

Dimensions

motortype	$\emptyset D$
UAG33	$\emptyset 8\ 0$ -0,05
UAG3E	$\emptyset 6\ 0$ -0,05

motortype	$\emptyset D$
UAG43	$\emptyset 8\ 0$ -0,05
UAG4E	$\emptyset 6\ 0$ -0,05

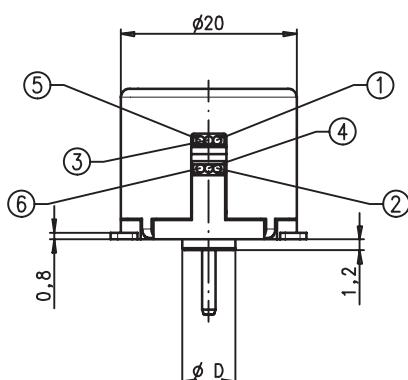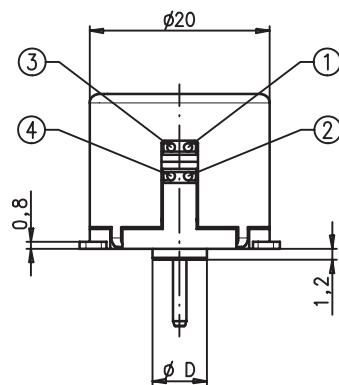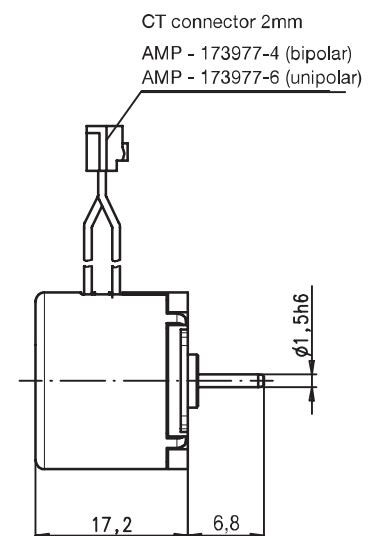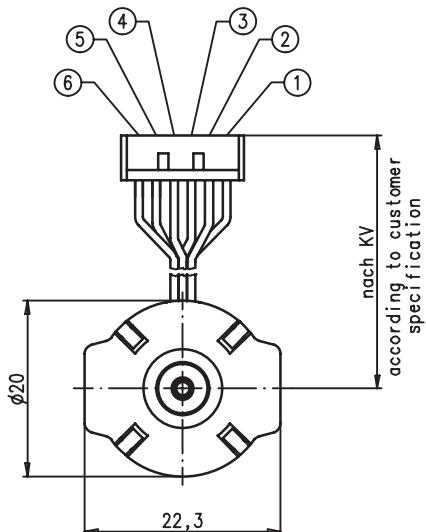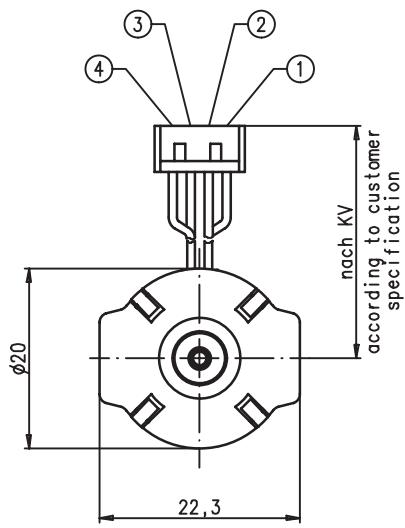


	0	I	II	III	IV
1	+	+	-	-	+
2	+	-	-	+	+
3	-	-	+	+	-
4	-	+	+	-	-

→ clockwise rotation
← counter clockwise rotation


	0	I	II	III	IV
1	-	-	+	+	-
2	-	+	+	-	-
3	+	+	+	+	+
4	+	+	+	+	+
5			-	-	
6		-	-		

→ clockwise rotation
← counter clockwise rotation

Performance Chart

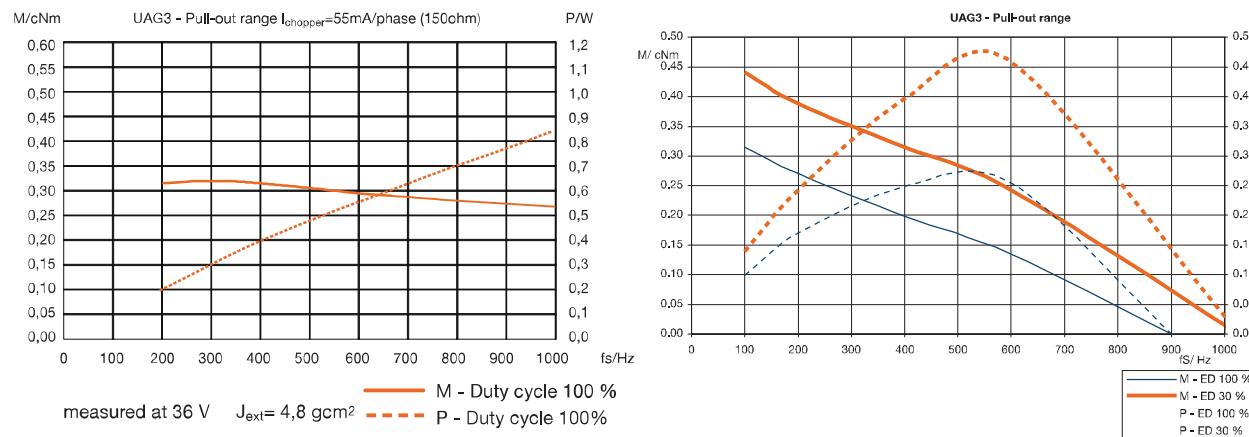

Rotational

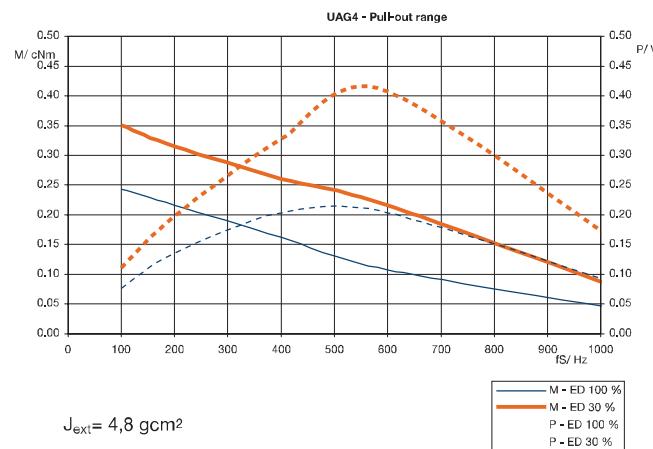

UCD1/7; UCD2/8

Dimensions (mm)	$\varnothing 28 \times 24$
Step angle (°)	7,5
Holding torque *	(cNm) 1,6–2,7
Detent torque (cNm)	0,26–0,42
Winding	bipolar/unipolar
Gear combination	on request

* values for lead wire version (connection N) / connector versions up to 15 % higher

**Standard Data**

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15 ... +60
Ambient temperature storage	°C -20 ... +100
Thermal resistance at f=0 R _{therm}	29 K/W
Thermal class	B according to DIN EN 60085
Approval	standard
Mounting	any position
Electrical connection	connector type D or N
Protection	IP 30 according to DIN EN 60529
Weight	54 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	Sintered bronze, self-lubricating

Order Reference



Type	Stepper Motor	UCD	1	0	N	24 Ω	R	B
Configuration	1 bipolar, standard magnet 2 unipolar, standard magnet	7 bipolar, stronger magnet 8 unipolar, stronger magnet						
Rotor shaft, mounting	3 centring 8 mm, shaft 2,0 mm, screw plate 4 centring 8 mm, shaft 1,5 mm, screw plate 0 centring 8 mm, shaft 2,0 mm, clip 1 centring 8 mm, shaft 1,5 mm, clip	E centring 10 mm, shaft 2,0 mm, screw plate K centring 10 mm, shaft 1,5 mm, screw plate A centring 10 mm, shaft 2,0 mm, clip C centring 10 mm, shaft 1,5 mm, clip						
Approval	N Approval Standard							
Resistance	see next pages; Resistance per winding for bipolar or unipolar							
Direction	R reversible							
Connection	D see next pages „Connection Types“ N							

Technical Data



bipolar		UCD1	UCD7	
Holding torque M_H *	cNm	2	2,7	
Detent torque M_S	cNm	0,26	0,42	
Rotor inertia J_R	gcm ²	2,2	2,4	
Rated voltage U_N	V	6	12	24
Resistance per winding R_{20}	Ω	24	90	380
Steps per revolution		48		
Duty cycle		100%		
Direction of rotation	V	reversible		
unipolar		UCD2	UCD8	
Holding torque M_H	cNm	1,6	2,3	
Detent torque M_S	cNm	0,26	0,42	
Rotor inertia J_R	gcm ²	2,2	2,4	
Rated voltage U_N	V	3	6	24
Resistance per winding R_{20}	Ω	24	90	380
Steps per revolution		48		
Duty cycle		100%		
Direction of rotation	V	reversible		

* values for lead wire version (connection N) / connector versions up to 15 % higher


Circuit diagram bipolar

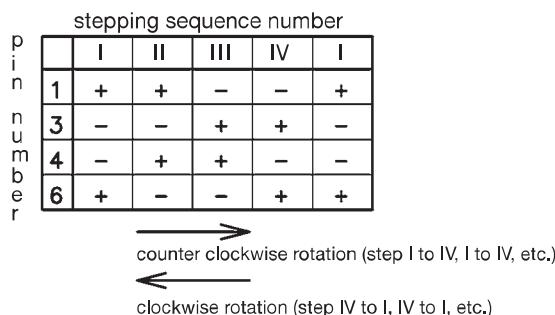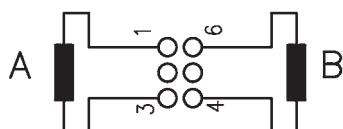


unipolar

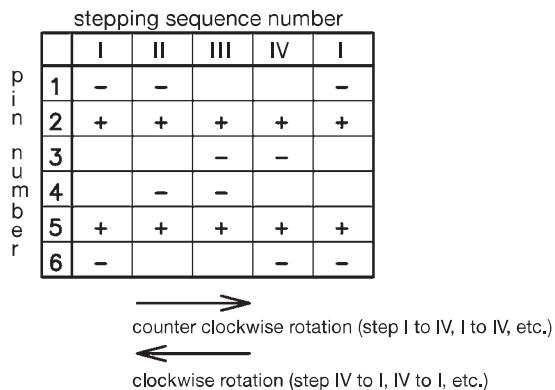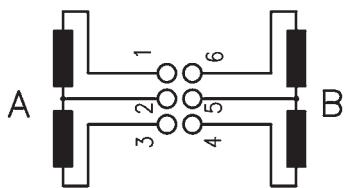


Dimensions Version with Connector D

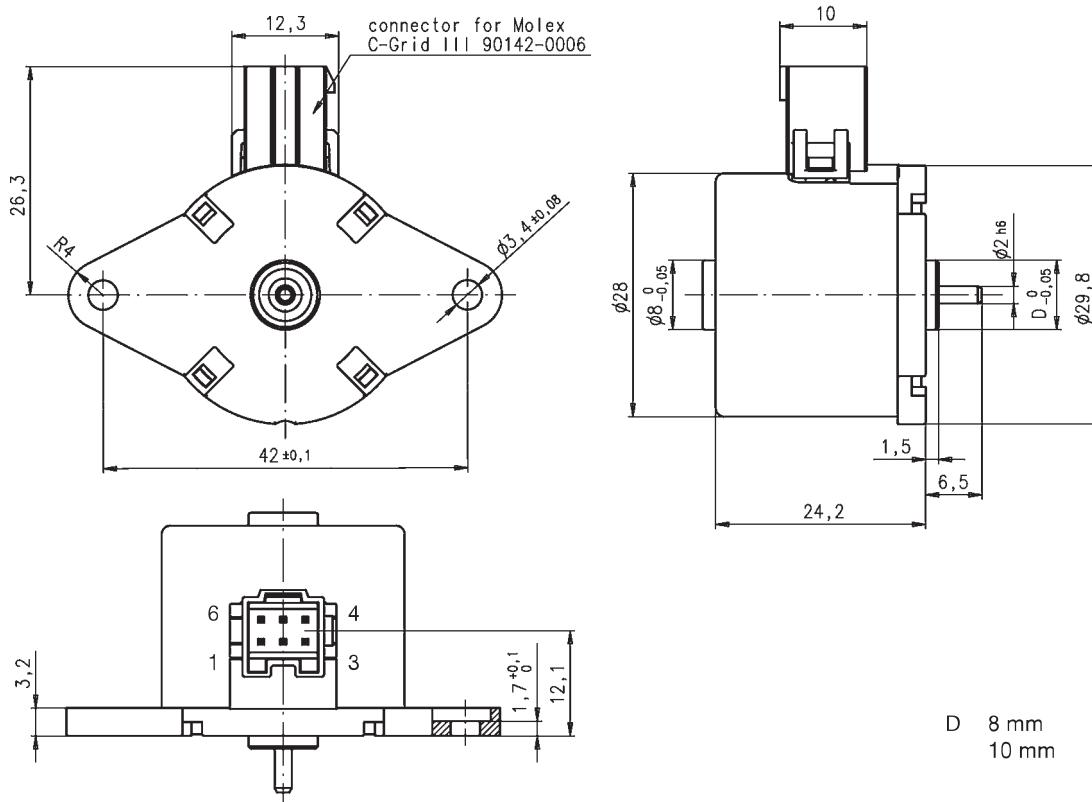

Version with Connector N

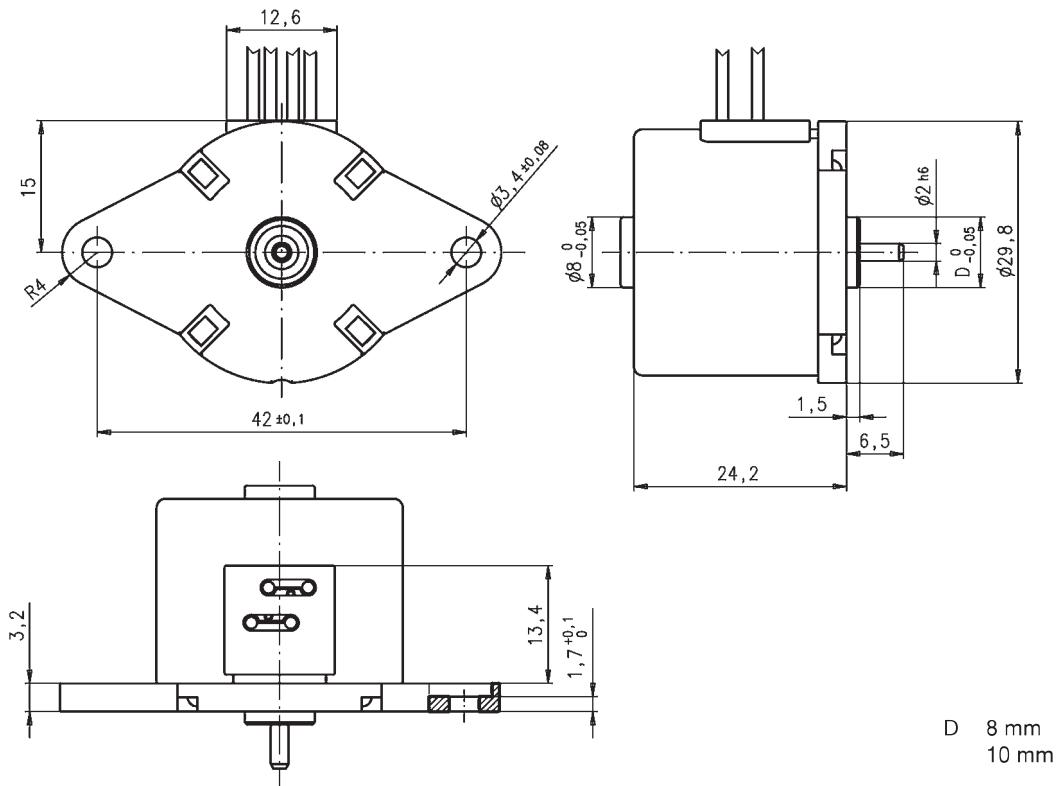

Performance Chart

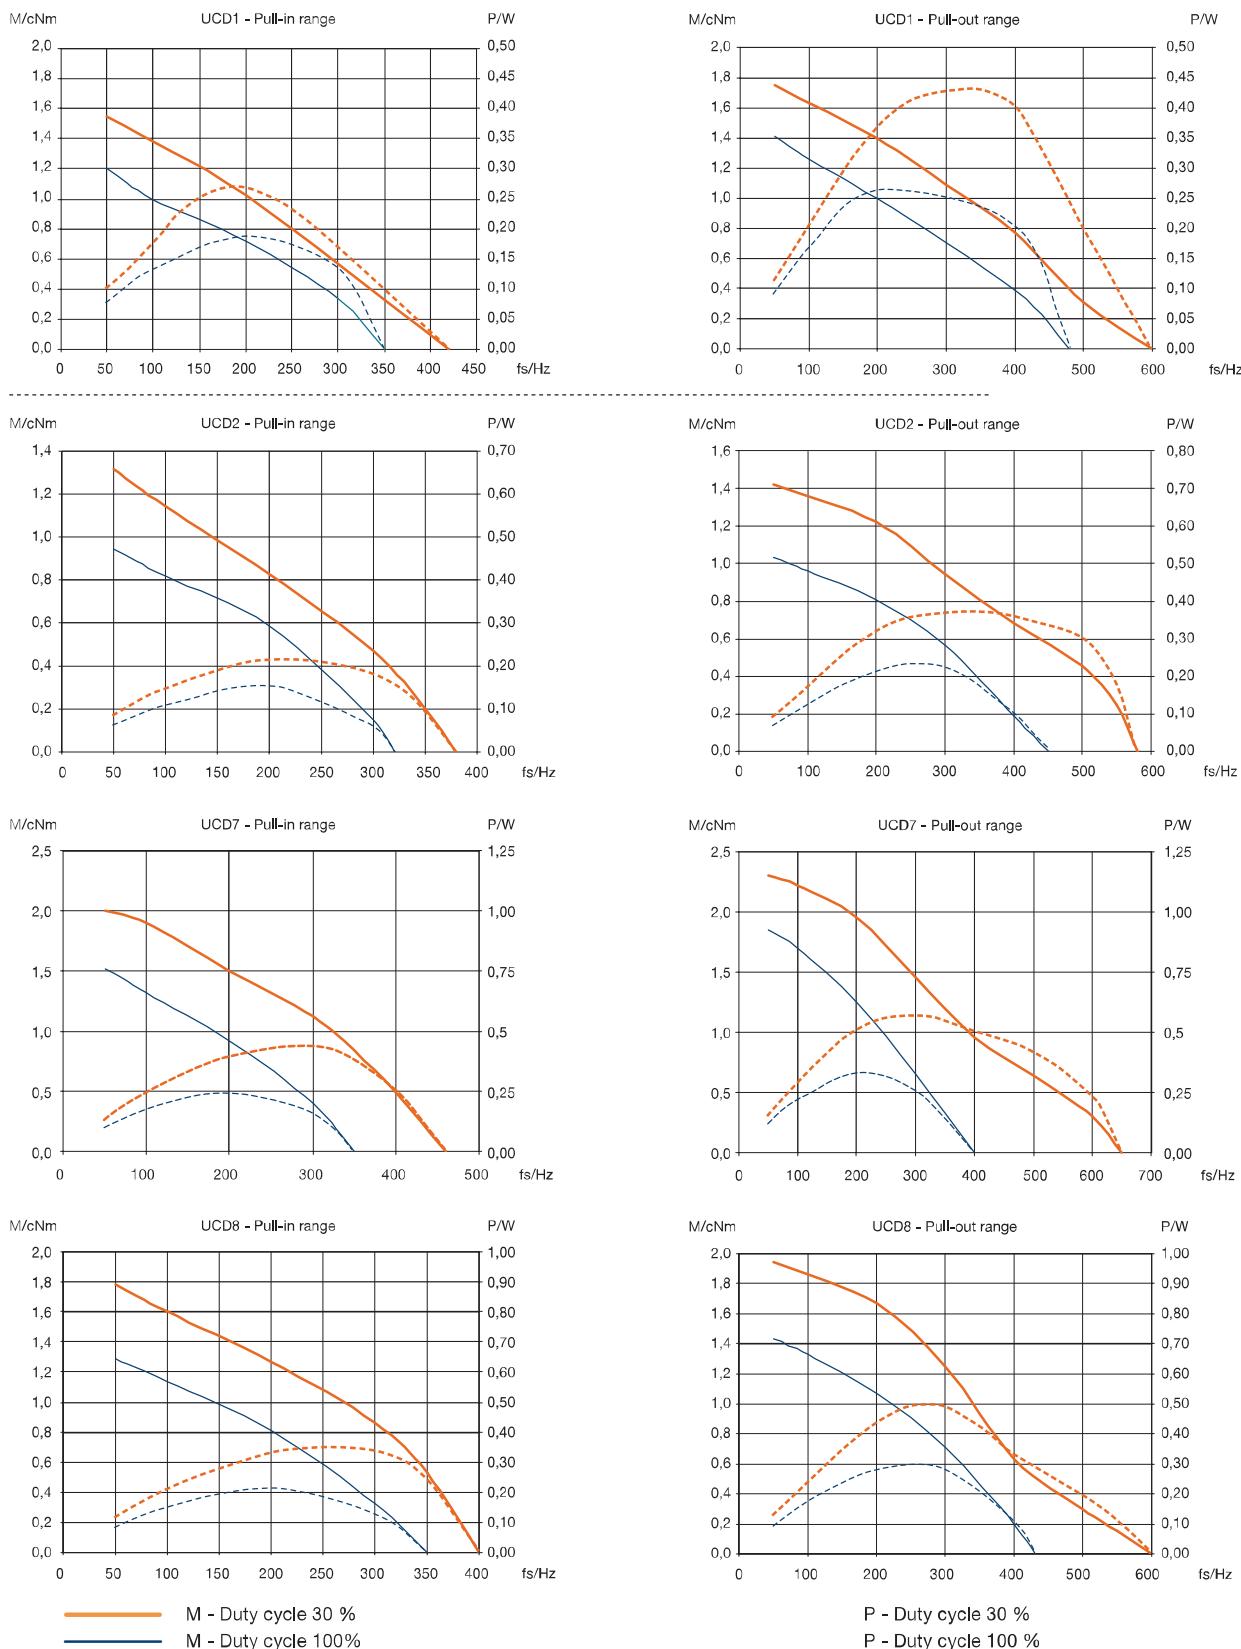

UCB1/7; UCB2/8

Dimensions (mm)	$\varnothing 28 \times 24$
Step angle (°)	15
Holding torque *	(cNm) 1,3–2,3
Detent torque (cNm)	0,29
Winding	bipolar/unipolar
Gear combination	on request

* values for lead wire version (connection N) / connector versions up to 15 % higher

**Standard Data**

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15 ... +60
Ambient temperature storage	°C -20 ... +100
Thermal resistance at f=0 R _{therm}	29 K/W
Thermal class	B according to DIN EN 60085
Approval	standard
Mounting	any position
Electrical connection	connector type D or N
Protection	IP 30 according to DIN EN 60529
Weight	54 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	Sintered bronze, self-lubricating

Order Reference


Type	Stepper Motor	UCB	1	0	N	24 Ω	R	B
Configuration	1 bipolar, standard magnet 2 unipolar, standard magnet	7 8	bipolar, stronger magnet unipolar, stronger magnet					
Rotor shaft, mounting	3 centring 8 mm, shaft 2,0 mm, screw plate 4 centring 8 mm, shaft 1,5 mm, screw plate 0 centring 8 mm, shaft 2,0 mm, clip 1 centring 8 mm, shaft 1,5 mm, clip	E K A C	centring 10 mm, shaft 2,0 mm, screw plate centring 10 mm, shaft 1,5 mm, screw plate centring 10 mm, shaft 2,0 mm, clip centring 10 mm, shaft 1,5 mm, clip					
Approval	N Approval Standard							
Resistance	see next pages; Resistance per winding for bipolar or unipolar							
Direction	R reversible							
Connection	D see next pages „Connection Types“ N							

Technical Data

bipolar			UCB1	UCB7
Holding torque M_H^*	cNm	1,7	2,3	
Detent torque M_S	cNm	0,29	0,46	
Rotor inertia J_R	gcm ²	2,1	2,4	
Rated voltage U_N	V	6	12	24
Resistance per winding R_{20}	Ω	24	90	380
Steps per revolution		24		
Duty cycle		100%		
Direction of rotation	V	reversible		
unipolar			UCB2	UCB8
Holding torque M_H^*	mNm	1,3	1,8	
Detent torque M_S	mNm	0,29	0,46	
Rotor inertia J_R	gcm ²	2,1	2,4	
Rated voltage U_N	V	6	12	24
Resistance per winding R_{20}	Ω	24	90	380
Steps per revolution		24		
Duty cycle		100%		
Direction of rotation	V	reversible		

* values for lead wire version (connection N) / connector versions up to 15 % higher

Circuit diagram bipolar

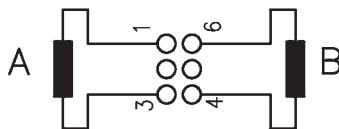


stepping sequence number					
p o s i t i o n n u m b e r	I	II	III	IV	I
1	+	+	-	-	+
3	-	-	+	+	-
4	-	+	+	-	-
6	+	-	-	+	+

counter clockwise rotation (step I to IV, I to IV, etc.)

clockwise rotation (step IV to I, IV to I, etc.)

unipolar

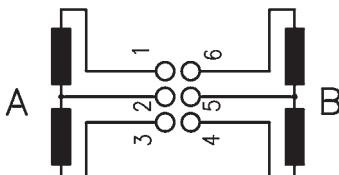


stepping sequence number					
p o s i t i o n n u m b e r	I	II	III	IV	I
1	-	-			-
2	+	+	+	+	+
3			-	-	
4		-	-		
5	+	+	+	+	+
6	-			-	-


counter clockwise rotation (step I to IV, I to IV, etc.)

clockwise rotation (step IV to I, IV to I, etc.)


Dimensions Version with Connector D

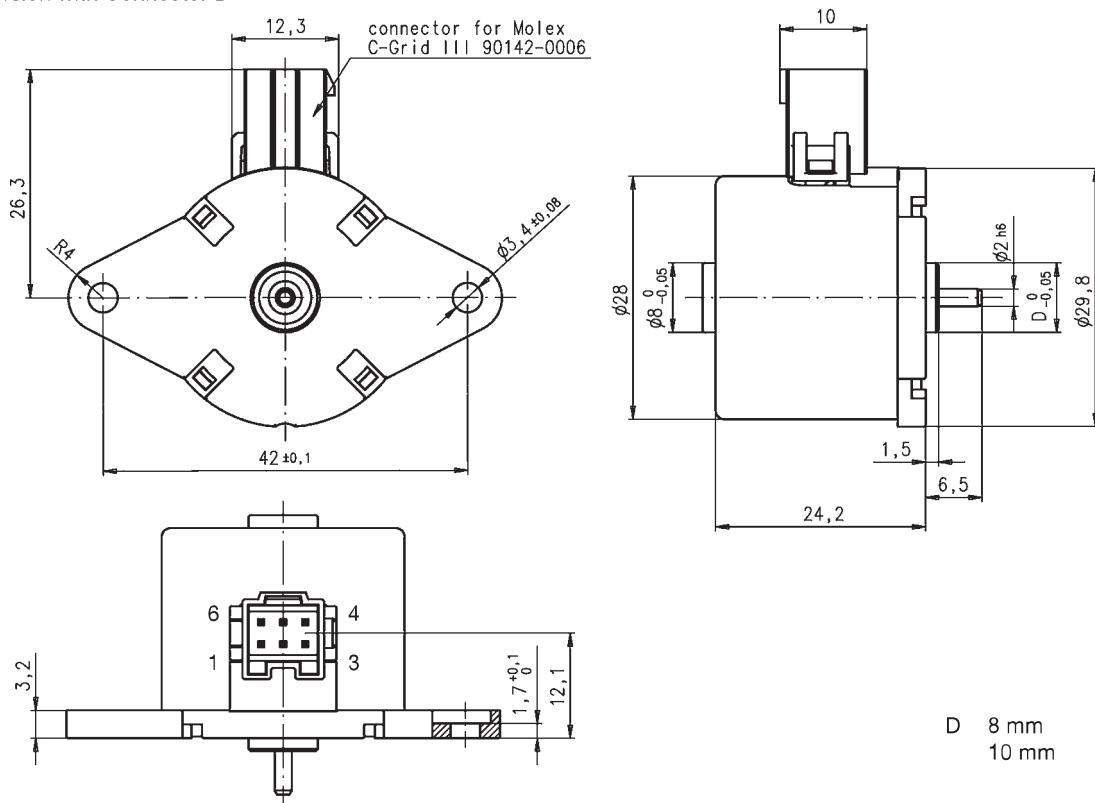

Version with Connector N

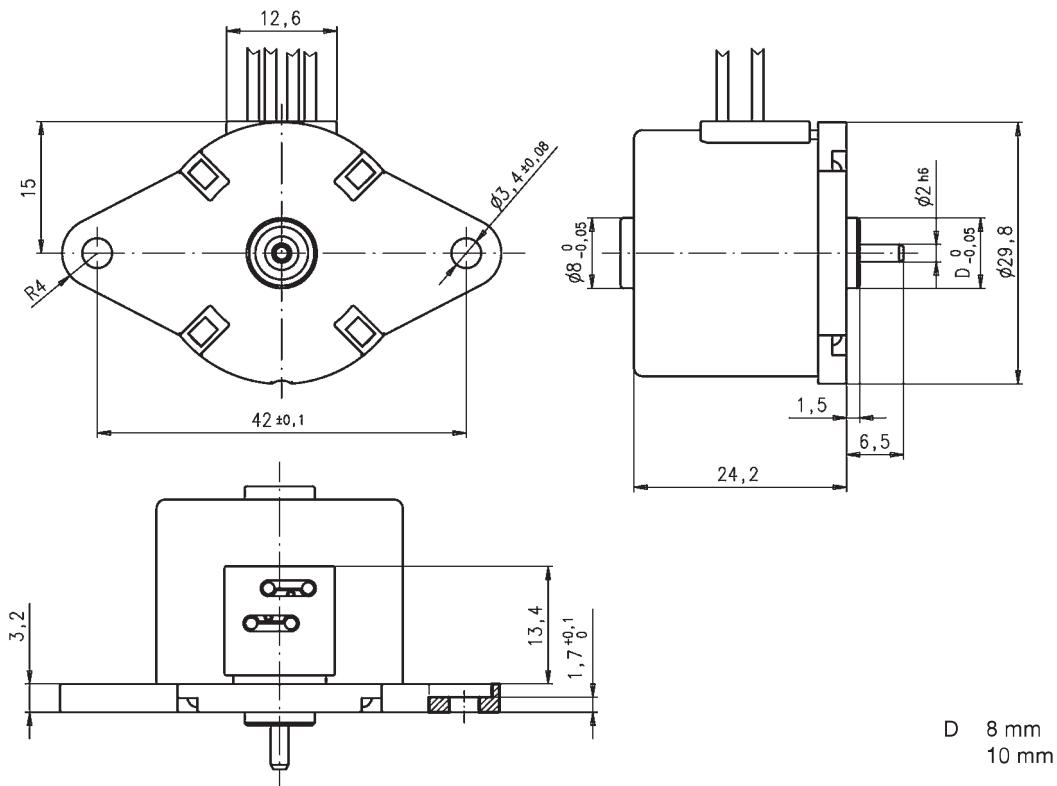

Performance Chart

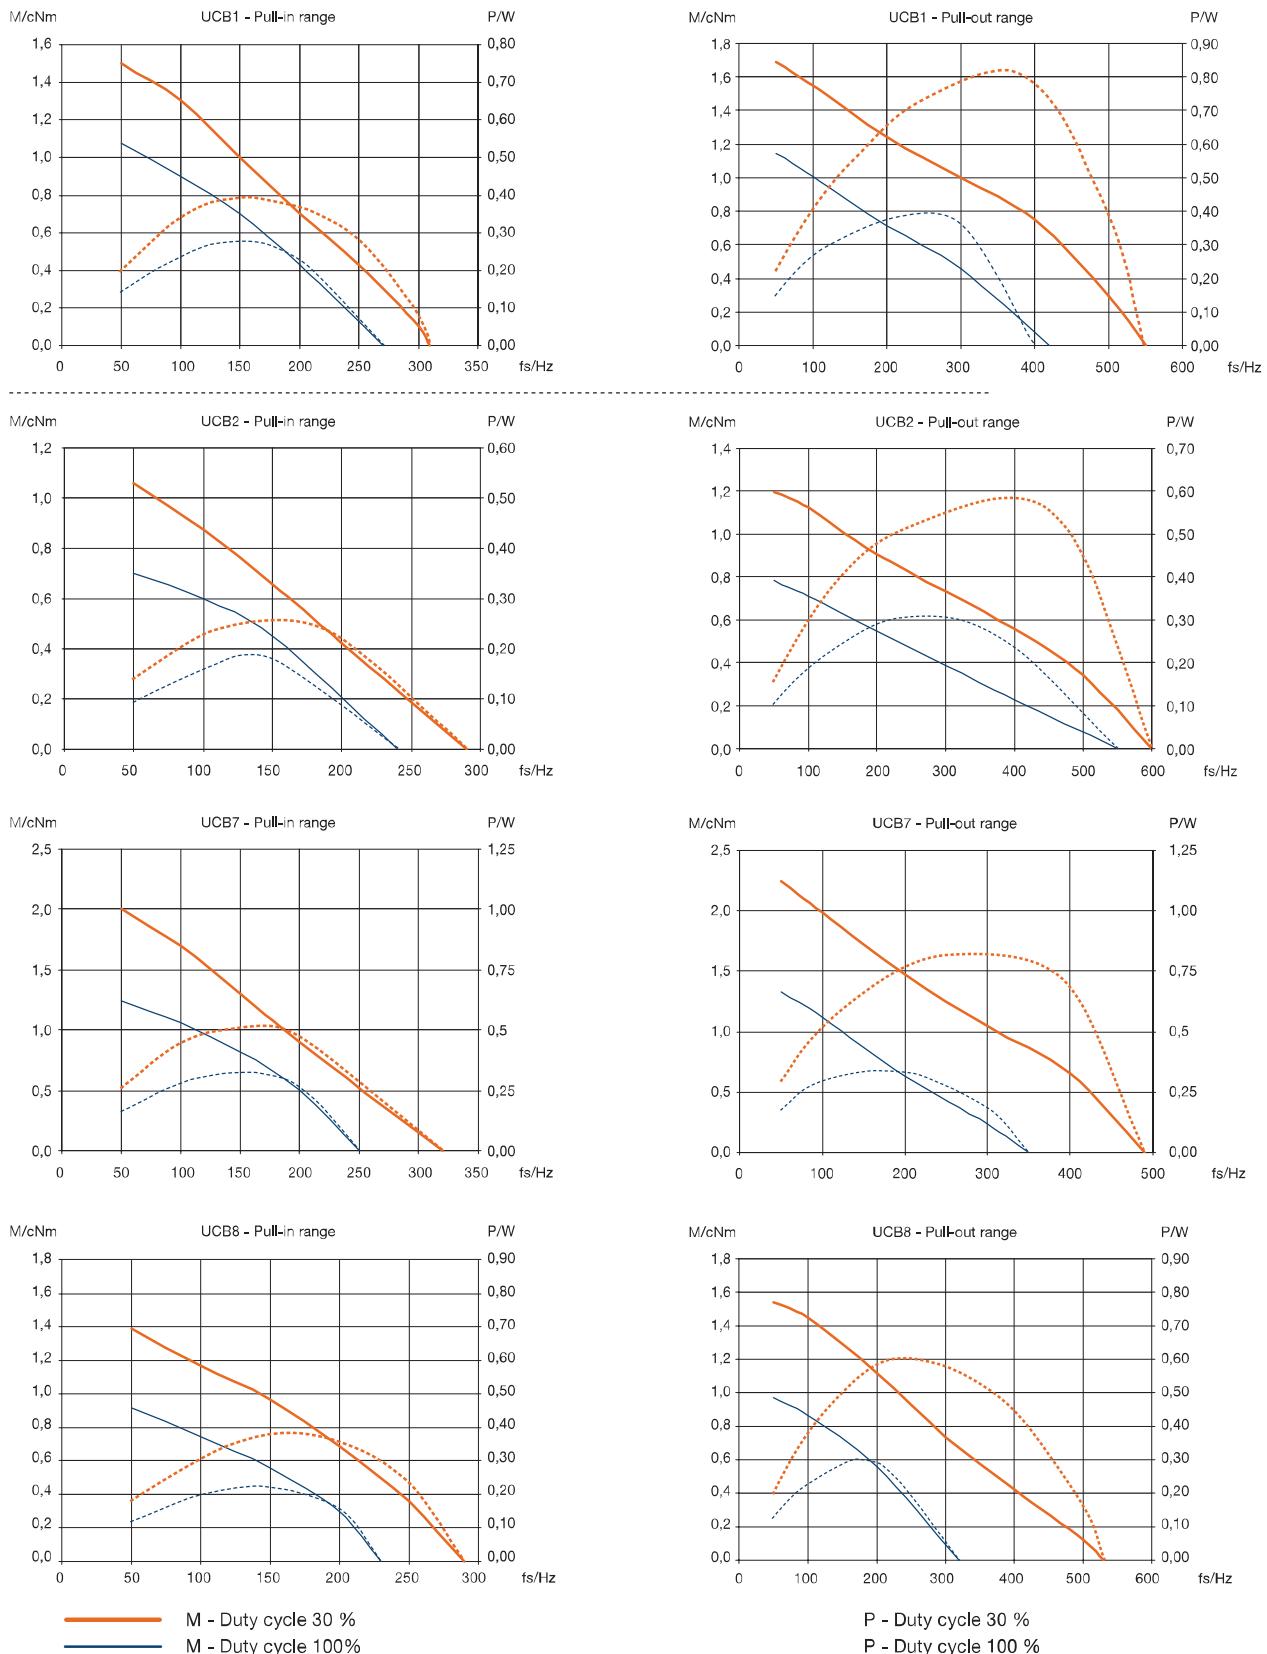

UBD

UBD1/2/5/6

Dimensions (mm)	$\varnothing 36 \times 21$
Step angle ($^{\circ}$)	7.5
Holding torque (cNm)	1.3–1.9
Detent torque (cNm)	0.22/0.27
Winding	bipolar/unipolar
Gear combination	A, D, M, B, F, V



Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	$^{\circ}\text{C}$ -15...+55
Ambient temperature storage	$^{\circ}\text{C}$ -20...+100
Thermal resistance at $f=0$ R_{therm}	27 K/W
Thermal class	A according to DIN EN 60085
Approval	standard (UL/CSA on request)
Mounting	any position
Electrical connection	cable
Protection	IP 40 according to DIN EN 60529
Weight	60 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	sintered bronze, self-lubricating
Electric strength	according to DIN EN 60034-1/DIN EN 60335-1


Order Reference

Type	Stepper Motor	UBD	1	0	N	18,5	R	E
Configuration	1 bipolar, standard magnet 2 unipolar, standard magnet	5	bipolar, stronger magnet 6 unipolar, stronger magnet					
Rotor shaft, mounting	0 centring 8 mm, shaft 2,0 mm, clip 1 centring 8 mm, shaft 1,5 mm, clip 3 centring 8 mm, shaft 2,0 mm, screw plate 4 centring 8 mm, shaft 1,5 mm, screw plate	A C E K	centring 10 mm, shaft 2,0 mm, clip centring 10 mm, shaft 1,5 mm, clip centring 10 mm, shaft 2,0 mm, screw plate centring 10 mm, shaft 1,5 mm, screw plate					
Approval	N Approval Standard							
Resistance	See next page Resistance per winding for bipolar or unipolar.							
Direction	reversible							
Cable	E cable 150 mm (other on request)							



Technical Data

bipolar (UBD1/5)	Rated voltage U_N	V	3	6	12	24
	Resistance per winding R_{20}	Ω	11,5	18,5	100	460
	Holding torque M_H	cNm	1,8 (UBD1); 1,9 (UBD5)			
	Detent torque M_S	cNm	0,22 (UBD1); 0,27 (UBD5)			
	Rotor inertia J_R	gcm^2	2,8 (UBD 1), 2,9 (UBD 5)			
unipolar (UBD2/6)	Rated voltage U_N	V	3	6	12	24
	Resistance per winding R_{20}	Ω	12	28	120	500
	Holding torque M_H	cNm	1,3 (UBD2); 1,6 (UBD6)			
	Detent torque M_S	cNm	0,22 (UBD2); 0,27 (UBD6)			
	Rotor inertia J_R	gcm^2	2,8 (UBD2); 2,9 (UBD6)			
	Steps per revolution		48			
	Winding temperature T_{max}		105° C			
	Duty cycle		100%			
	Direction of rotation		reversible			


Dimensions Mounting with screw plate

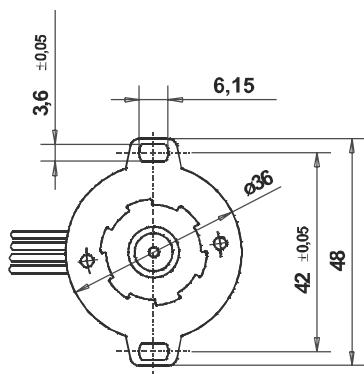

Mounting with screw plate

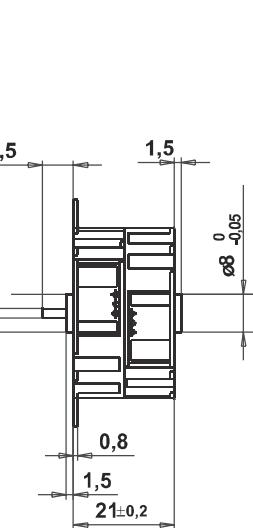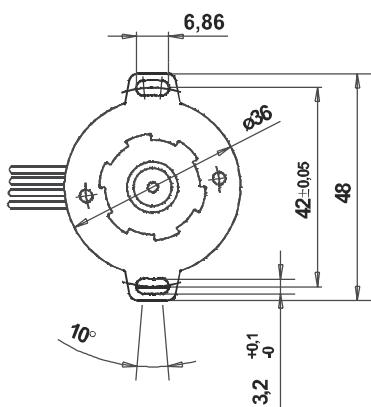

Mounting with snap on clip

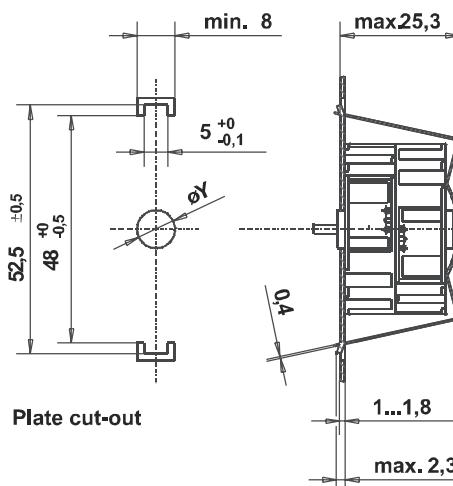

øD Rotor shaft

ø 2 h6


ø 1,5 js8

øZ øY

8 8F8

10 10F8

Performance Chart

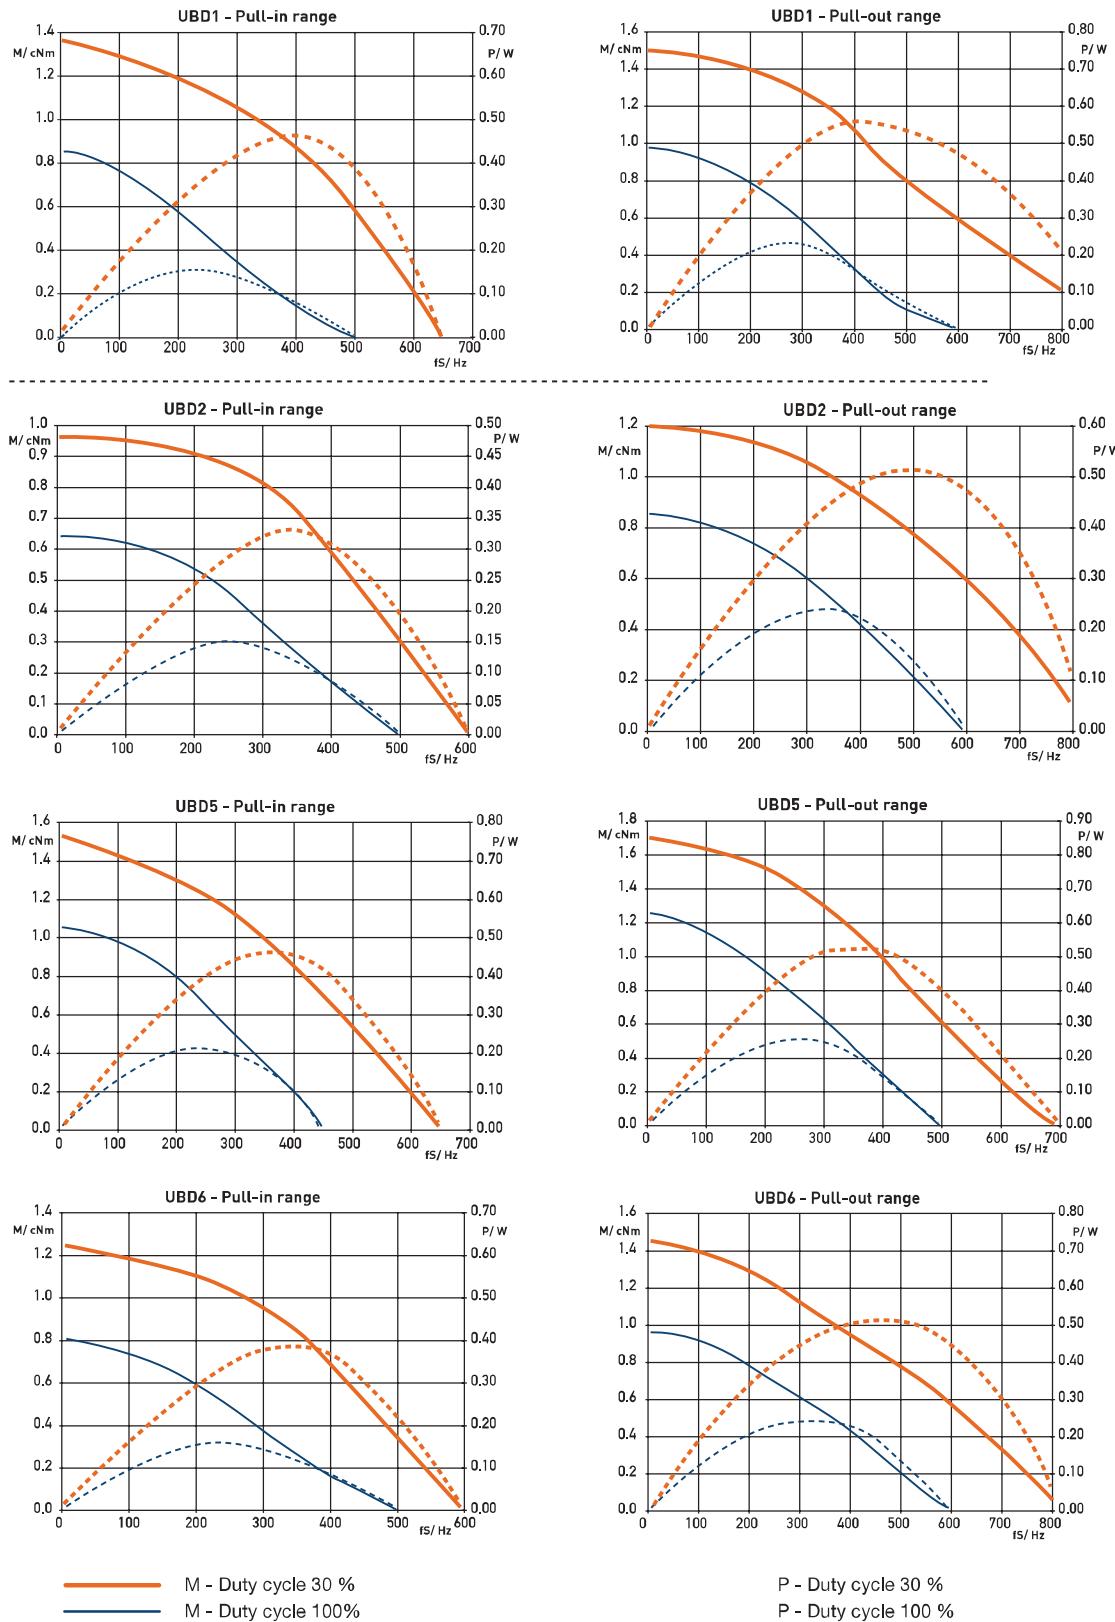

UBB1/2/5/6

Dimensions (mm)	$\varnothing 36 \times 21$
Step angle ($^{\circ}$)	15
Holding torque (cNm)	1.0–1.9
Detent torque (cNm)	0.25/0.36
Winding	bipolar/unipolar
Gear combination	A, D, M, B, F, V



Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	$^{\circ}\text{C}$ -15...+55
Ambient temperature storage	$^{\circ}\text{C}$ -20...+100
Thermal resistance at $f=0$ R_{therm}	27 K/W
Thermal class	A according to DIN EN 60085
Approval	standard (UL/CSA on request)
Mounting	any position
Electrical connection	cable
Protection	IP 40 according to DIN EN 60529
Weight	60 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	sintered bronze, self-lubricating
Electric strength	according to DIN EN 60034-1/DIN EN 60335-1

Order Reference


Type	Stepper Motor	UBB	1	0	N	18,5	R	E
Configuration	1 bipolar, standard magnet 2 unipolar, standard magnet	5	bipolar, stronger magnet 6 unipolar, stronger magnet					
Rotor shaft, mounting	0 centring 8 mm, shaft 2,0 mm, clip 1 centring 8 mm, shaft 1,5 mm, clip 3 centring 8 mm, shaft 2,0 mm, screw plate 4 centring 8 mm, shaft 1,5 mm, screw plate	A C E K	centring 10 mm, shaft 2,0 mm, clip centring 10 mm, shaft 1,5 mm, clip centring 10 mm, shaft 2,0 mm, screw plate centring 10 mm, shaft 1,5 mm, screw plate					
Approval	N Approval Standard							
Resistance	See next page Resistance per winding for bipolar or unipolar.							
Direction	reversible							
Cable	E cable 150 mm (other on request)							

Technical Data


bipolar (UBB1/5)	Rated voltage U_N	V	3	6	12	24
	Resistance per winding R_{20}	Ω	11,5	18,5	100	460
	Holding torque M_H	cNm	1,5 (UBB1); 1,9 (UBB5)			
	Detent torque M_S	cNm	0,25 (UBB1); 0,36 (UBB5)			
	Rotor inertia J_R	gcm^2	2,8 (UBB1); 2,9 (UBB5)			
unipolar (UBB2/6)	Rated voltage U_N	V	3	6	12	24
	Resistance per winding R_{20}	Ω	12	28	120	500
	Holding torque M_H	cNm	1,0 (UBB2); 1,4 (UBB6)			
	Detent torque M_S	cNm	0,25 (UBB2); 0,36 (UBB6)			
	Rotor inertia J_R	gcm^2	2,8 (UBB2), 2,9 (UBB6)			
	Steps per revolution		24			
	Winding temperature T_{max}		105°C			
	Duty cycle		100%			
	Direction of rotation		reversible			

Dimensions


Mounting with screw plate

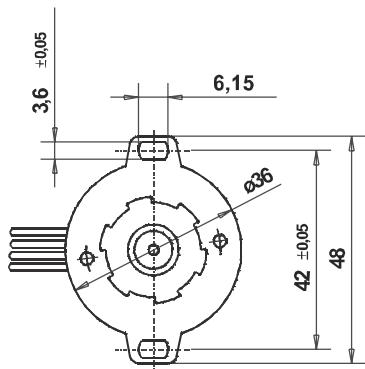

Mounting with screw plate

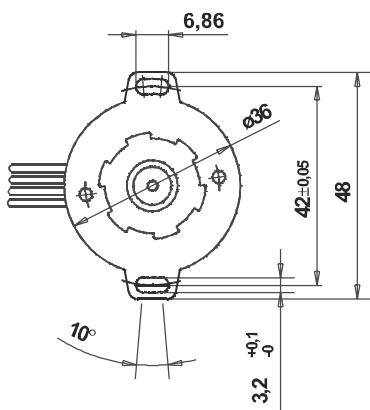

Mounting with snap on clip

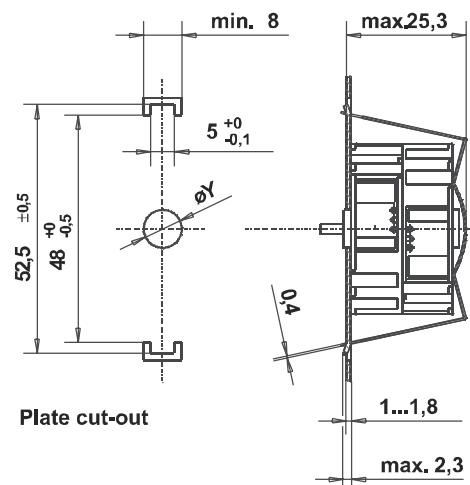

ϕD Rotor shaft

$\phi 2\ h6$


$\phi 1.5\ js8$

$\phi Z \quad \phi Y$

8 8F8

10 10F8

Performance Chart

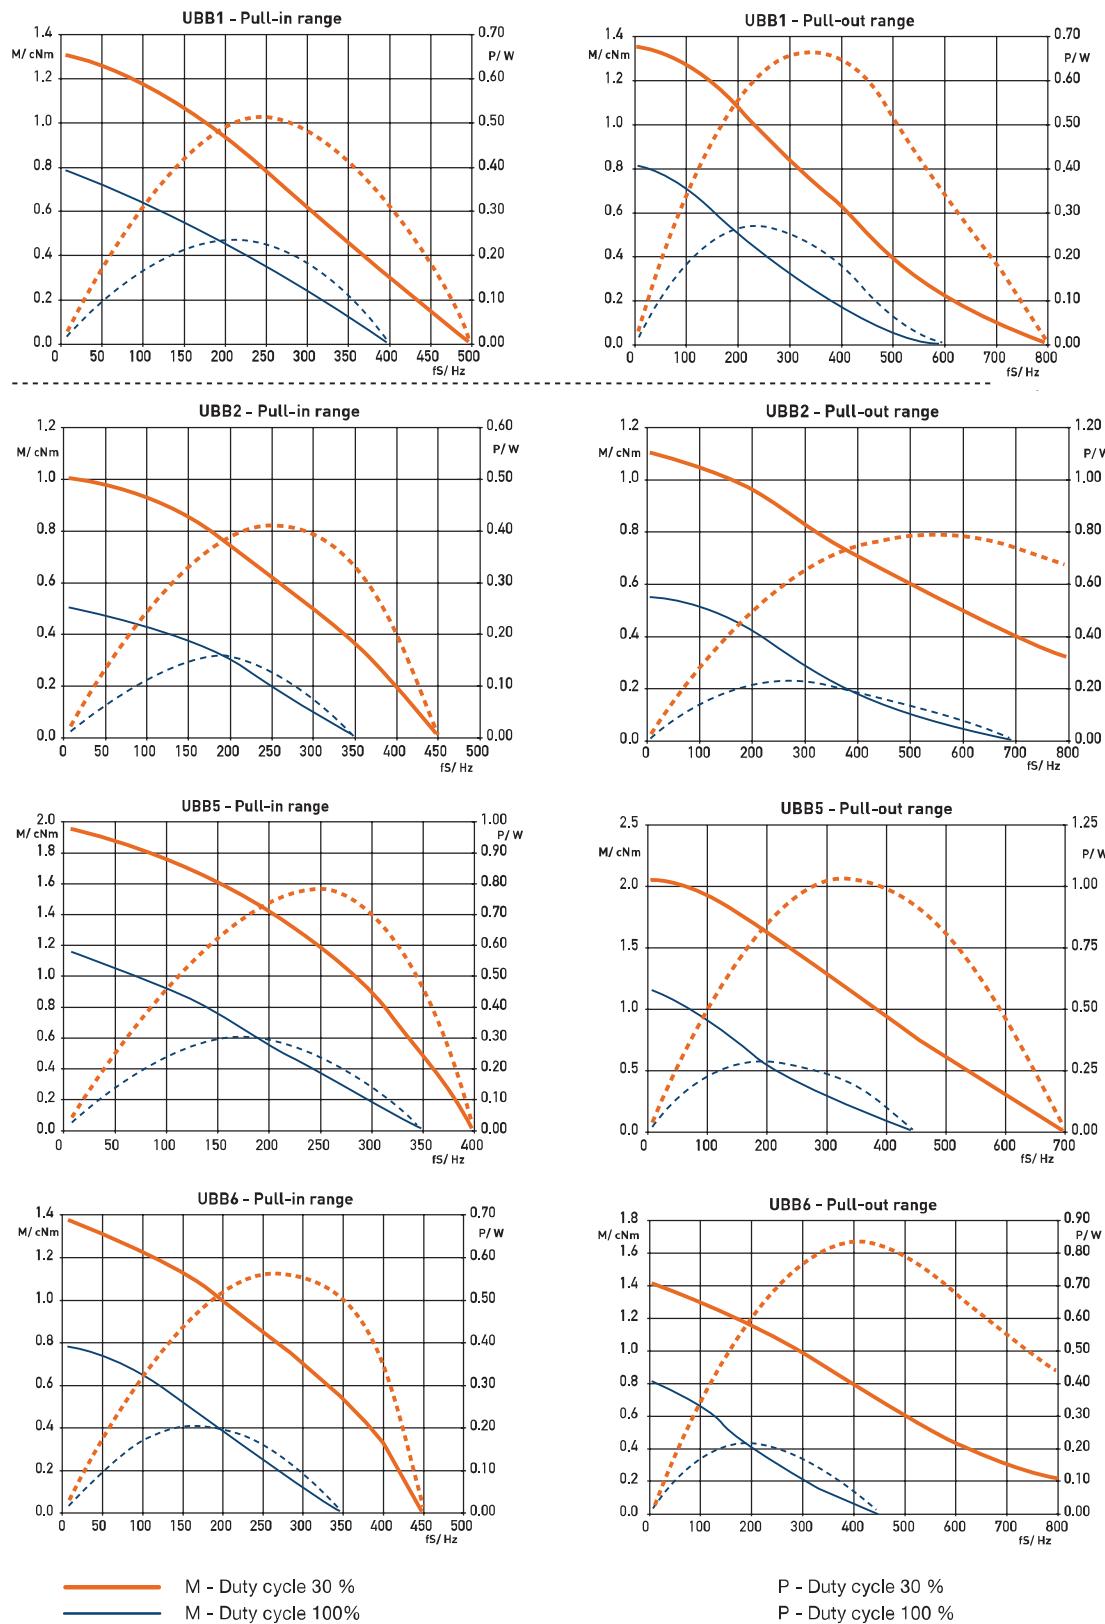

UDB

UDB1/2

Dimensions (mm)	$\varnothing 48 \times 24$
Step angle ($^{\circ}$)	15
Holding torque (cNm)	2,7/2,2
Detent torque (cNm)	0.35
Winding	bipolar/unipolar
Gear combination	A, D, M, B, F, V, J



Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	$^{\circ}\text{C}$ -15...+60
Ambient temperature storage	$^{\circ}\text{C}$ -20...+100
Thermal resistance at $f=0$ R_{therm}	18 K/W
Thermal class	A according to DIN EN 60085
Approval	standard
Mounting	any position
Electrical connection	cable
Protection	IP 40 according to DIN EN 60529
Weight	132 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	sintered bronze, self-lubricating
Electric strength	according to DIN EN 60034-1/DIN EN 60335-1


Order Reference

Type	Stepper Motor	UDB	1	0	N	78	R	N
Configuration	1 bipolar 2 unipolar							
Rotor shaft, mounting	0 centring 8 mm, shaft 1,5 mm, clip 1 centring 8 mm, shaft 2,0 mm, clip							
Approval	N Approval Standard							
Resistance	See next page Resistance per winding for bipolar or unipolar.							
Direction	reversible							
Cable	N cable 150 mm (other on request)							


Technical Data

bipolar (UDB1)	Rated voltage U _N	V	6	12	24
	Resistance per winding R ₂₀	Ω	15	78	350
	Holding torque M _H	cNm	2,7		
	Detent torque M _S	cNm	0,35		
	Rotor inertia J _R	gcm ²	6,3		
unipolar (UDB2)	Rated voltage U _N	V	6	12	24
	Resistance per winding R ₂₀	Ω	19	75	300
	Holding torque M _H	cNm	2,2		
	Detent torque M _S	cNm	0,35		
	Rotor inertia J _R	gcm ²	6,3		
	Steps per revolution		24		
	Winding temperature T _{max}		105 °C		
	Duty cycle		100%		
	Direction of rotation		reversible		


Dimensions

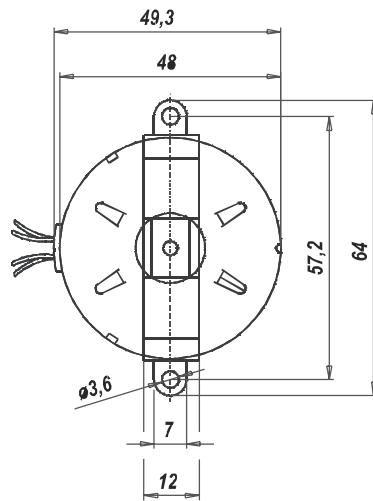

Mounting with screw clip

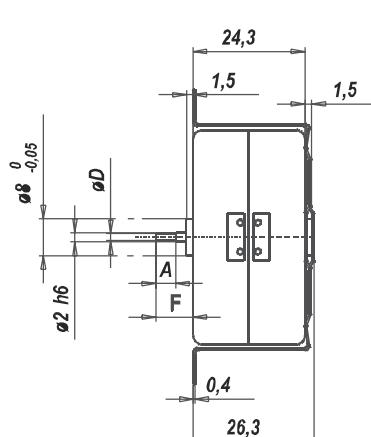


Mounting with snap-on clip

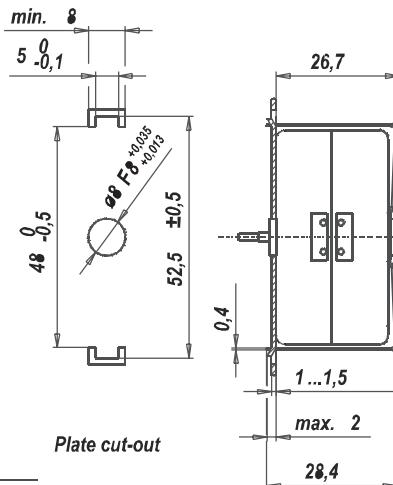

øD Rotor shaft	Dimension A	Dimension F
1,5js8 ^{+0,007} _{-0,007}	4,3	6,5
2h6 ⁰ _{-0,006}	—	8,2

Performance Chart

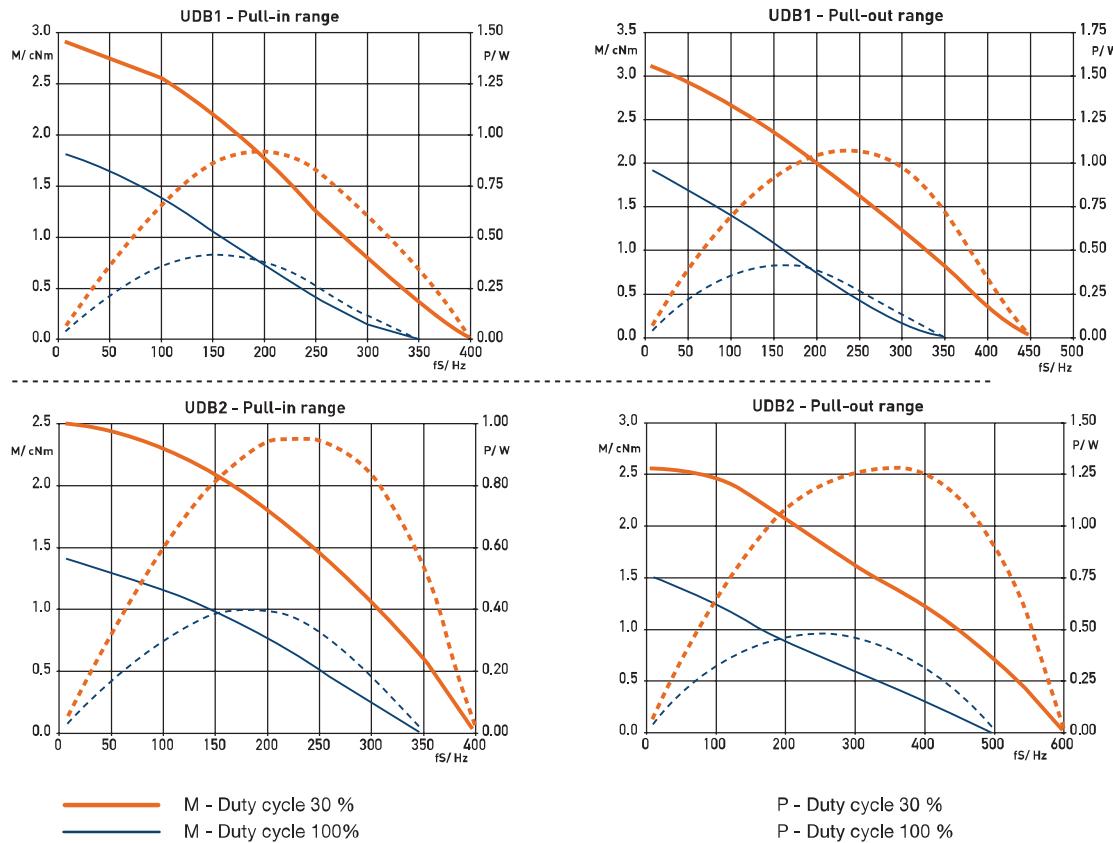

UO (ST5021; ST5022)

Dimensions (mm)	\varnothing 50 x 21
Step angle (°)	7,5/11,25
Holding torque (cNm)	3,7–4 (ST5021); 4 (ST5022)
Detent torque (cNm)	0,25 (ST5021); 1 (ST5022)
Winding	bipolar
Gear combination	O, P, R

**Standard Data**

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15 ... +40
Ambient temperature storage	°C -20 ... +100
Thermal class	B (ST5021); A (ST5022) according to DIN EN 60085
Approval	standard
Mounting	any position
Electrical connection	cable
Protection	IP 30 according to DIN EN 60529
Weight	180 g (ST5021); 195 g (ST5022)
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	Sintered bronze, self-lubricating


Order Reference

Type	Stepper Motor	ST5021 / ST5022	7,5°	7 Ω
Step angle	7,5° 11,25°			
Resistance	7 Ω			

Technical Data


ST5021	Step angle	°	7,5	11,25
	Rated voltage U_N	V	4	4
	Holding torque M_H	cNm	4	3,7
	Detent torque M_s	cNm	0,25	
	Rotor inertia J_R	gcm ²	14,5	
	Winding temperature increase	K	65	
	Current per winding	A	0,53	
	Resistance per winding R_{20}	Ω	7	
	Inductance per winding	mH	12,5	11,5
	Power consumption	W	4	
	Driver mode		Chopper drive	
ST5022	Step angle	°	7,5/11,25	
	Rated voltage U_N	V	4	
	Holding torque M_H	cNm	7,5	
	Detent torque M_s	cNm	1	
	Rotor inertia J_R	gcm ²	25	
	Winding temperature increase	K	65	
	Current per winding	A	0,53	
	Resistance per winding R_{20}	Ω	7	
	Inductance per winding	mH	11	
	Power consumption	W	4	
	Driver mode		Chopper drive	

Circuit diagram Motor connections - bipolar

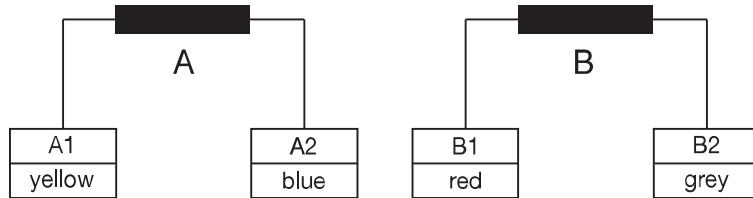


		clockwise rotation					
A	$\frac{A1}{A2}$	↓	↑	↑	↓	↓	
B	$\frac{B1}{B2}$	↑	↑	↓	↓	↑	


Dimensions

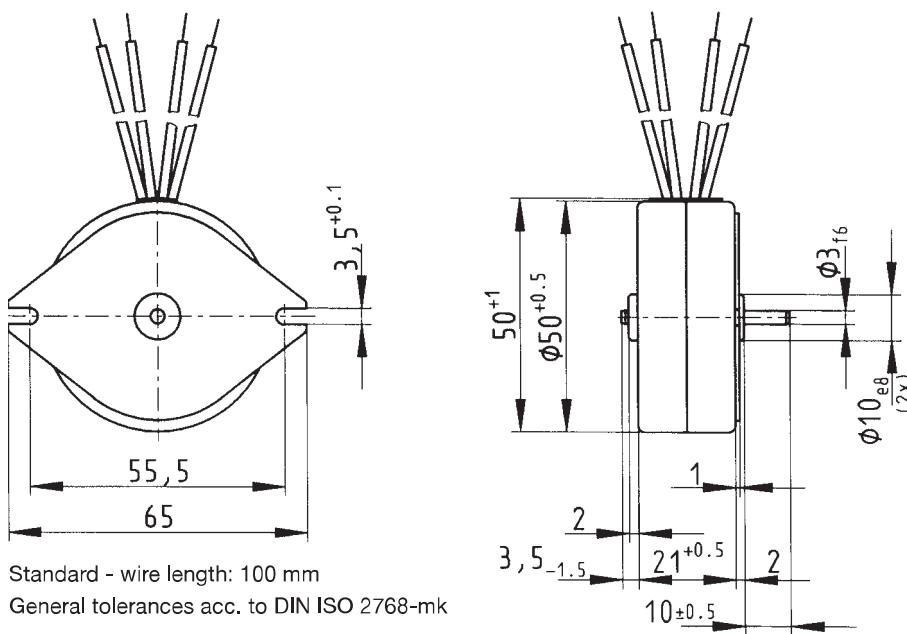**Performance Chart (chopper driver)**


ST5021 UOD1 (ST 5021/7,5/1)

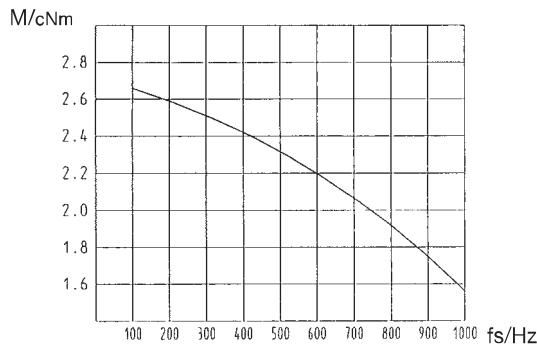


UOJ1 (ST 5021/11,25/1)

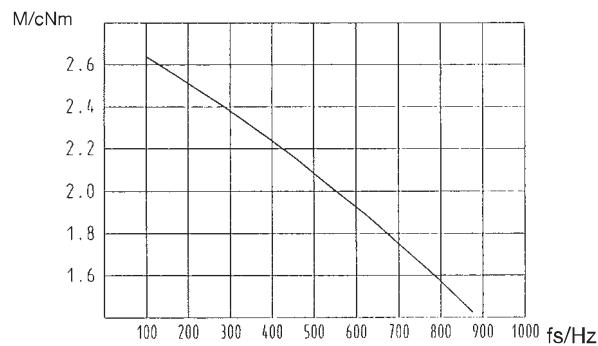

ST5022 UOD5 (ST 5022/7,5/1)

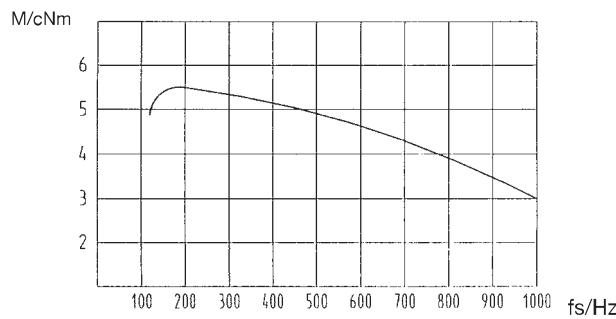

UOJ5 (ST 5022/11,25/1)

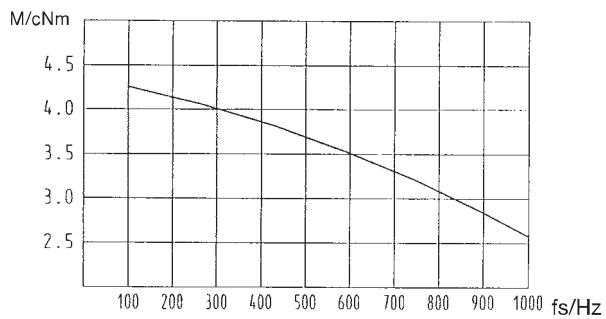

UFD 1/2

Dimensions (mm)	\varnothing 52 x 28
Step angle (°)	7.5
Holding torque (cNm)	6,4/6,4
Detent torque (cNm)	0.45
Winding	bipolar/unipolar
Gear combination	A, D, M, B, F, V, J, O

**Standard Data**

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15...+55
Ambient temperature storage	°C -20...+100
Thermal resistance at f=0 R _{therm}	13 K/W
Thermal class	A according to DIN EN 60085 (B on request)
Approval	standard (UL/CSA on request)
Mounting	any position
Electrical connection	cable
Protection	IP 30 according to DIN EN 60529
Weight	180 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	sintered bronze, self-lubricating
Electric strength	according to DIN EN 60034-1/DIN EN 60335-1


Order Reference

Type	Stepper Motor	UFD	1	0	N	52	R	N
Configuration	1 bipolar, two coils 2 unipolar, two coils							
Rotor shaft, mounting	0 centring 8 mm, shaft 3,0 mm, clip 1 centring 8 mm, shaft 2,0 mm, clip 2 centring 8 mm, shaft 1,5 mm, clip 3 centring 8 mm, shaft 3,0 mm, screw plate 4 centring 8 mm, shaft 2,0 mm, screw plate 5 centring 8 mm, shaft 1,5 mm, screw plate	E	centring 10 mm, shaft 3,0 mm, screw plate K	centring 10 mm, shaft 2,0 mm, screw plate M	centring 10 mm, shaft 1,5 mm, screw plate			
Approval	N Approval Standard							
Resistance	See next page Resistance per winding for bipolar or unipolar.							
Direction	reversible							
Cable	E cable 150 mm (other on request)							


Technical Data

bipolar (UFD1)	Rated voltage U _N	V	6	12	24
	Resistance per winding R ₂₀	Ω	9,5	52	250
	Holding torque M _H	cNm	6,4		
	Detent torque M _s	cNm	0,45		
	Rotor inertia J _R	gcm ²	14,4		
unipolar (UFD2)	Rated voltage U _N	V	6	12	24
	Resistance per winding R ₂₀	Ω	15	61	251
	Holding torque M _H	cNm	4,6		
	Detent torque M _s	cNm	0,45		
	Rotor inertia J _R	gcm ²	14,4		
	Steps per revolution		48		
	Winding temperature T _{max}		105 °C		
	Duty cycle		100%		
	Direction of rotation		reversible		
	Rotor shaft		3, Ø D = 3h6, Dim. A = „-“		

Dimensions

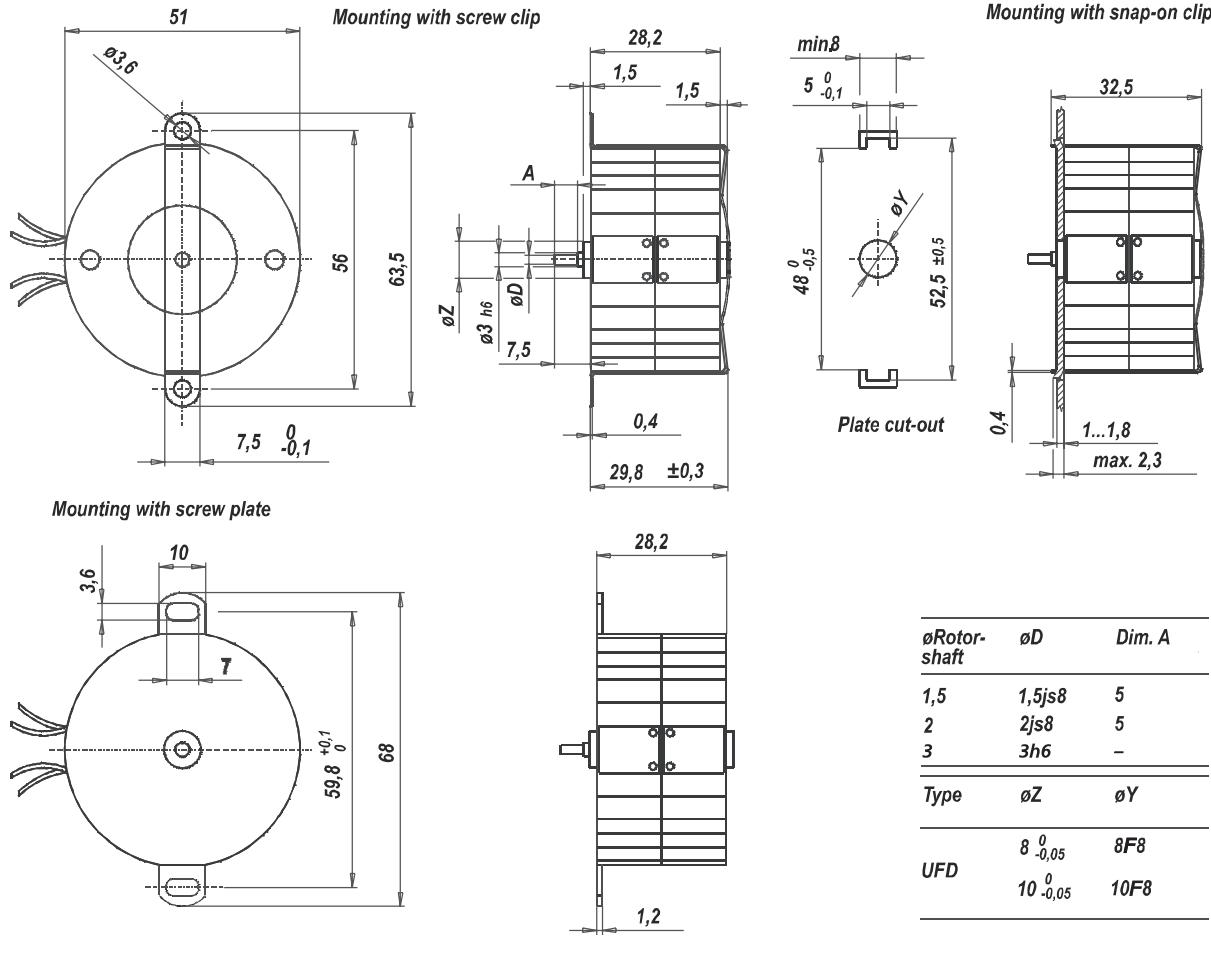

Performance Chart

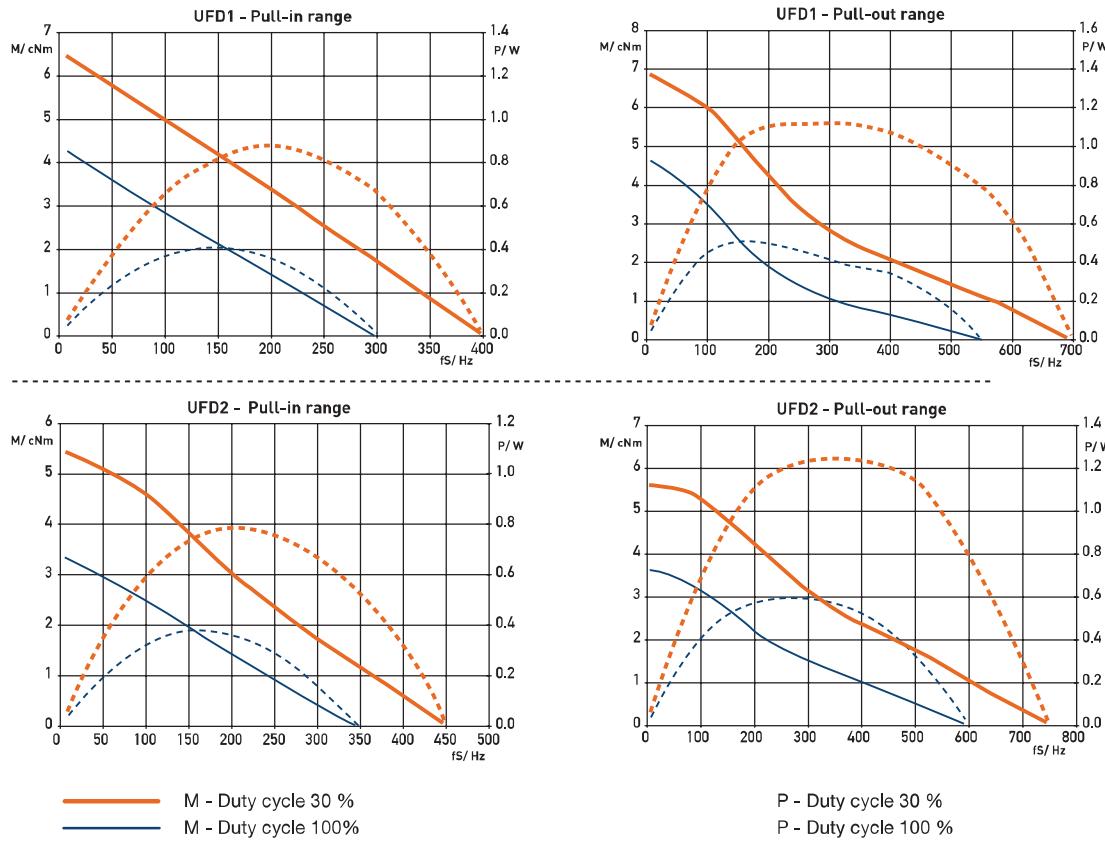

UFB1/2; UFB3/4

Dimensions (mm)	$\varnothing 52 \times 28$ / $\varnothing 52 \times 56$
Step angle (°)	15
Holding torque (cNm)	4,3–5,5 (UFB1/2); 7,6–10,4 (UFB3/4)
Detent torque (cNm)	0,45 (UFB1/2); 0,8 (UFB3/4)
Winding	bipolar/unipolar
Gear combination	A, D, M, B, F, V, J, O



Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15...+55
Ambient temperature storage	°C -20...+100
Thermal resistance at f=0 R _{therm}	11 K/W (UFB1/2), 7 K/W (UFB3/4)
Thermal class	A according to DIN EN 60085 (B on request)
Approval	standard (UL/CSA on request)
Mounting	any position
Electrical connection	cable
Protection	IP 30 according to DIN EN 60529
Weight	180 g (UFB1/2), 350 g (UFB3/4)
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	sintered bronze, self-lubricating
Electric strength	according to DIN EN 60034-1/DIN EN 60335-1

Order Reference


Type	Stepper Motor	UFB	1	0	N	52 Ω	R	N
Configuration	1 bipolar, two coils 2 unipolar, two coils	3	bipolar, four coils 4 unipolar, four coils					
Rotor shaft, mounting	0 centring 8 mm, shaft 3,0 mm, clip 1 centring 8 mm, shaft 2,0 mm, clip 2 centring 8 mm, shaft 1,5 mm, clip 3 centring 8 mm, shaft 3,0 mm, screw plate * 4 centring 8 mm, shaft 2,0 mm, screw plate * 5 centring 8 mm, shaft 1,5 mm, screw plate *	E K M A	centring 10 mm, shaft 3,0 mm, screw plate * centring 10 mm, shaft 2,0 mm, screw plate * centring 10 mm, shaft 1,5 mm, screw plate * centring 12 mm, shaft 3,0 mm, clip					
Approval	N Approval Standard							
Resistance	See next page Resistance per winding for bipolar or unipolar.							
Direction	reversible							
Cable	N cable 150 mm (other on request)							
* screw plate not for UFB3 and UFB4								

Technical Data


bipolar (UFB1/3)	Rated voltage U _N	V	6	12	24
	Resistance per winding R ₂₀ (UFB1) Ω		9,5	52	250
	Resistance per winding R ₂₀ (UFB3) Ω		5	25,5	125
	Holding torque M _H	cNm	5,5 (UFB1); 10,4 (UFB3)		
	Detent torque M _s	cNm	0,46 (UFB1); 0,8 (UFB3)		
	Rotor inertia J _R	gcm ²	14,2 (UFB1); 24,2 (UFB3)		
unipolar (UFB2/4)	Rated voltage U _N	V	6	12	24
	Resistance per winding R ₂₀ (UFB2) Ω		15	61	251
	Resistance per winding R ₂₀ (UFB4) Ω		7,5	30,5	125
	Holding torque M _H	cNm	4,3 (UFB2); 7,6 (UFB4)		
	Detent torque M _s	cNm	0,46 (UFB2); 0,8 (UFB4)		
	Rotor inertia J _R	gcm ²	14,2 (UFB2); 24,2 (UFB4)		
	Steps per revolution		24		
	Duty cycle		100%		
	Winding temperature T _{max}		105° C		
	Direction of rotation		reversible		

Dimensions


UFB1/2

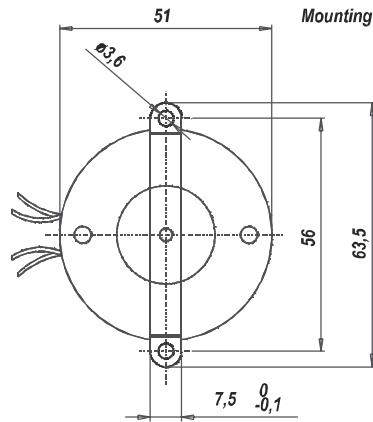


Mounting with screw clip

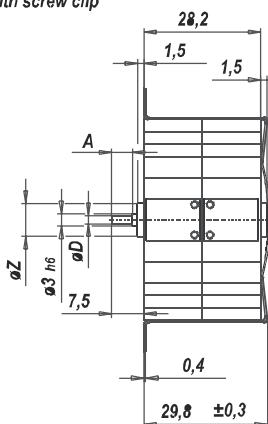

Mounting with snap-on clip

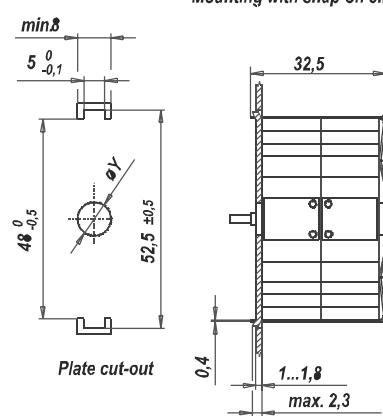


Mounting with screw plate

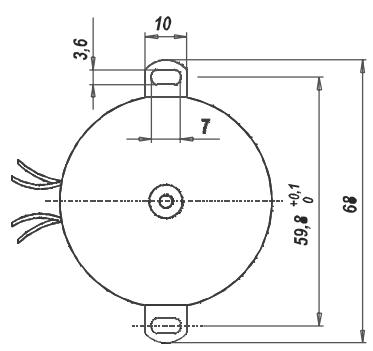


\varnothing Rotor-shaft	\varnothing D	Dim. A
1,5	1,5js8	5
2	2js8	5
3	3h6	-

\varnothing Z	\varnothing Y
8 ⁰ -0,05	8F8
10 ⁰ -0,05	10F8


UFB3/4

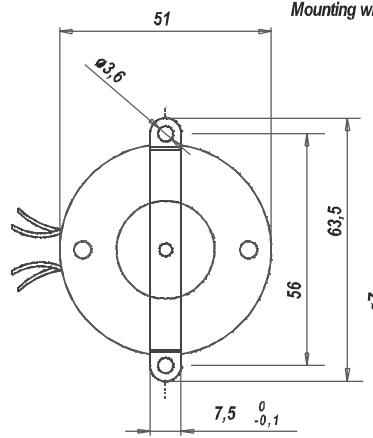

Mounting with screw clip

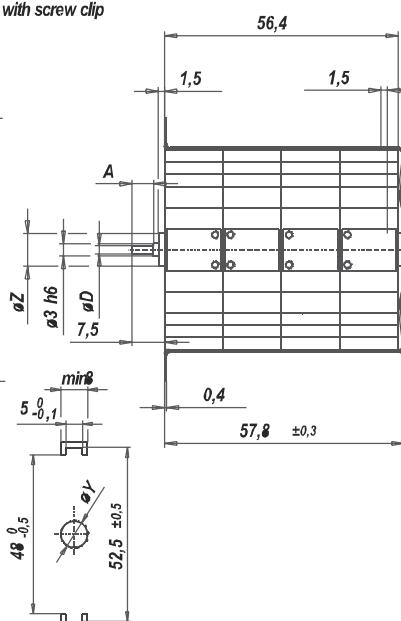


Mounting with snap-on clip

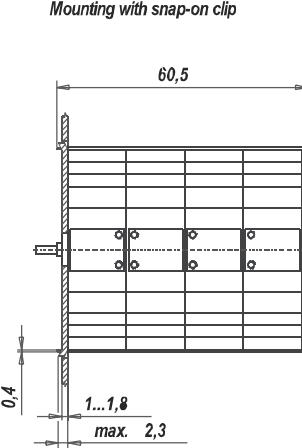

\varnothing Rotor-shaft	\varnothing D	Dim. A
2	2js8	5
3	3h6	-

\varnothing Z	\varnothing Y
8 ⁰ -0,05	8F8
10 ⁰ -0,05	10F8

Performance Chart

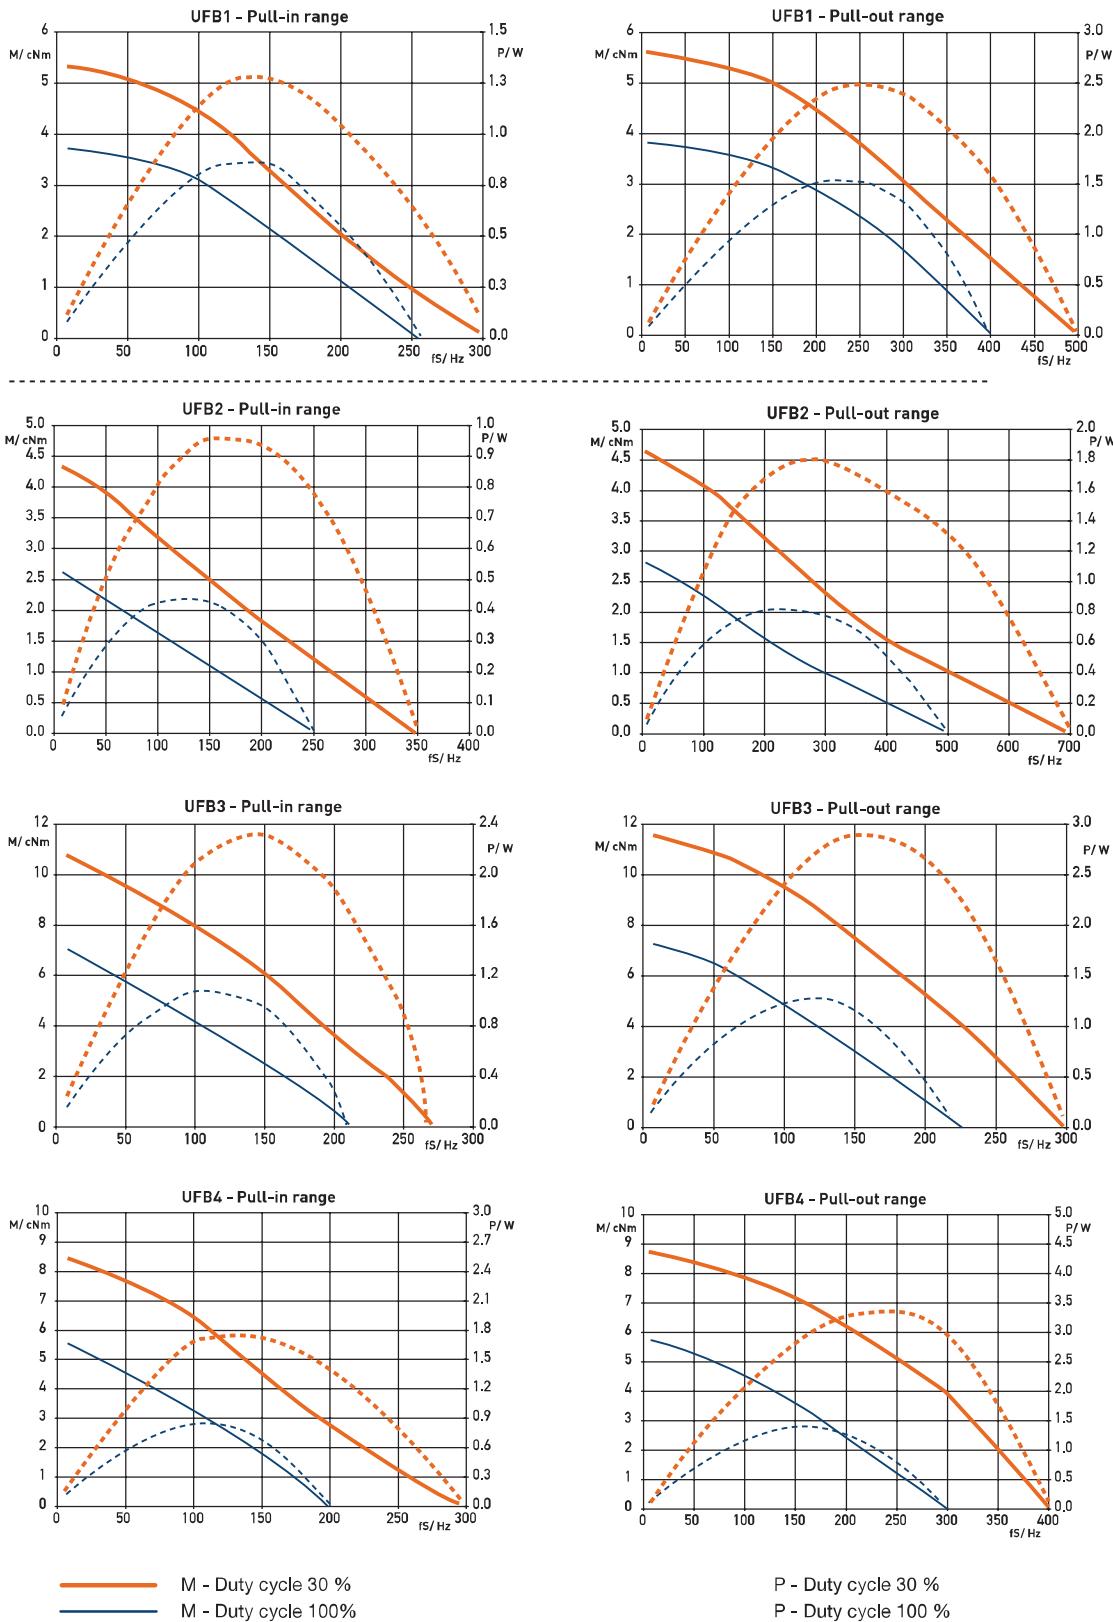

UHD1/2/5/6; UHD3/4/7/8

Dimensions (mm)	$\varnothing 59 \times 35$ / $\varnothing 59 \times 70$
Step angle (°)	7.5
Holding torque (cNm)	13–24 (UHD1/2/5/6); 27,5–45,5 (UHD3/4/7/8)
Detent torque (cNm)	1.3–2,1 (UHD1/2/5/6); 3,4–5,3 (UHD3/4/7/8)
Winding	bipolar/unipolar
Gear combination	J



Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	-15 ... +55 °C
Ambient temperature storage	-20 ... +100 °C
Thermal resistance at f=0 (R_{therm})	9 K/W (UHD 1/2/5/6); 6,7 K/W (UHD 3/4/7/8)
Thermal class	A according to DIN EN 60085 (B on request)
Approval	standard
Mounting	any position
Electrical connection	cable
Protection	IP 30 according to DIN EN 60529
Weight (g)	300 (UHD 1/2/5/6), 580 (UHD 3/4/7/8)
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	sintered bronze, self-lubricating
Electric strength	according to DIN EN 60034-1/DIN EN 60335-1

Order Reference


Type	Stepper Motor	UHD	1	0	N	36	R	N
Configuration								
1	bipolar, two coils, standard magnet	3	bipolar, four coils, standard magnet					
2	unipolar, two coils, standard magnet	4	unipolar, four coils, standard magnet					
5	bipolar, two coils, stronger magnet	7	bipolar, four coils, stronger magnet					
6	unipolar, two coils, stronger magnet	8	unipolar, four coils, stronger magnet					
Rotor shaft, mounting	0 centring 12 mm, shaft 6,35 mm, clip **	3	centring 12 mm, shaft 6,35 mm, screw plate*					
1	centring 12 mm, shaft 4,0 mm, clip **	4	centring 12 mm, shaft 4,0 mm, screw plate*					
2	centring 12 mm, shaft 3,0 mm, clip **	5	centring 12 mm, shaft 3,0 mm, screw plate*					
Approval	N Standard							
Resistance	see next pages Resistance per winding for bipolar or unipolar.							
Direction	reversible							
Cable	N cable 150 mm (other on request)							

* not for UHD3/4/7/8
** not for UHD1/2/5/6


Technical Data UHD1/2/5/6

bipolar (UHD1/5)	Rated voltage U_N	V	6	12	24
	Resistance per winding R_{20}	Ω	6,8	36	168
	Holding torque	cNm	17,1 (UHD1); 24 (UHD5)		
	Detent torque M_s	cNm	1,3 (UHD1/2); 2,1 (UHD5/6)		
	Rotor inertia J_R	$g\text{cm}^2$	49 (UHD1/2); 56 (UHD5/6)		
unipolar (UHD2/6)	Rated voltage U_N	V	6	12	24
	Resistance per winding R_{20}	Ω	10	45	190
	Holding torque	cNm	13 (UHD2); 17,3 (UHD6)		
	Detent torque M_s	cNm	1,3 (UHD1/2); 2,1 (UHD5/6)		
	Rotor inertia J_R	$g\text{cm}^2$	49 (UHD1/2); 56 (UHD5/6)		
	Steps per revolution		48		
	Duty cycle		100%		
	Winding temperature T_{max}		130° C		
	Direction of rotation		reversible		

Dimensions

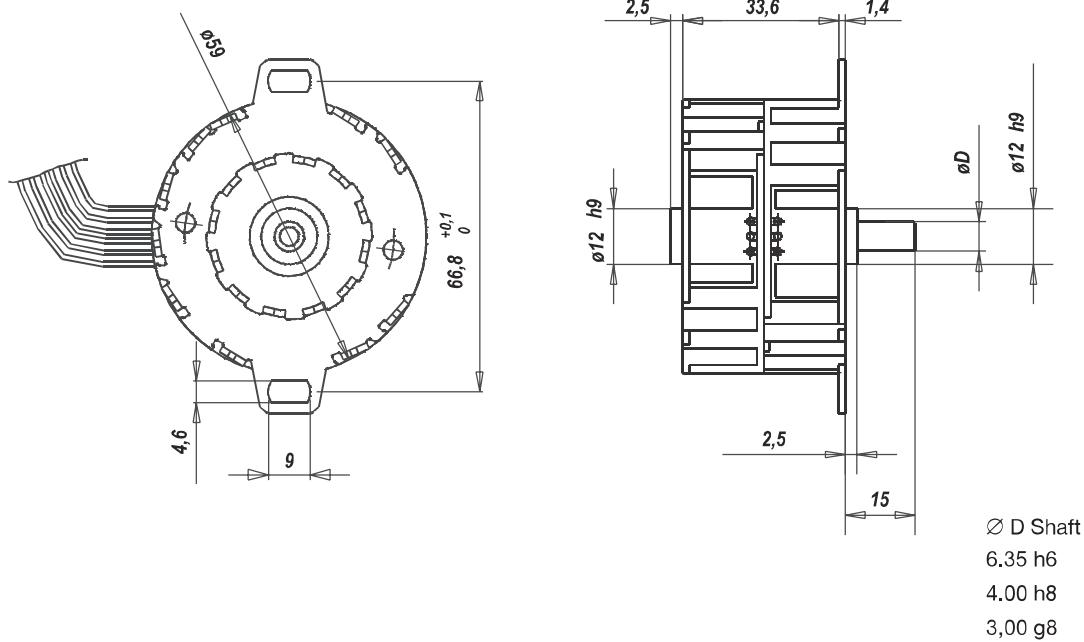


Performance Chart

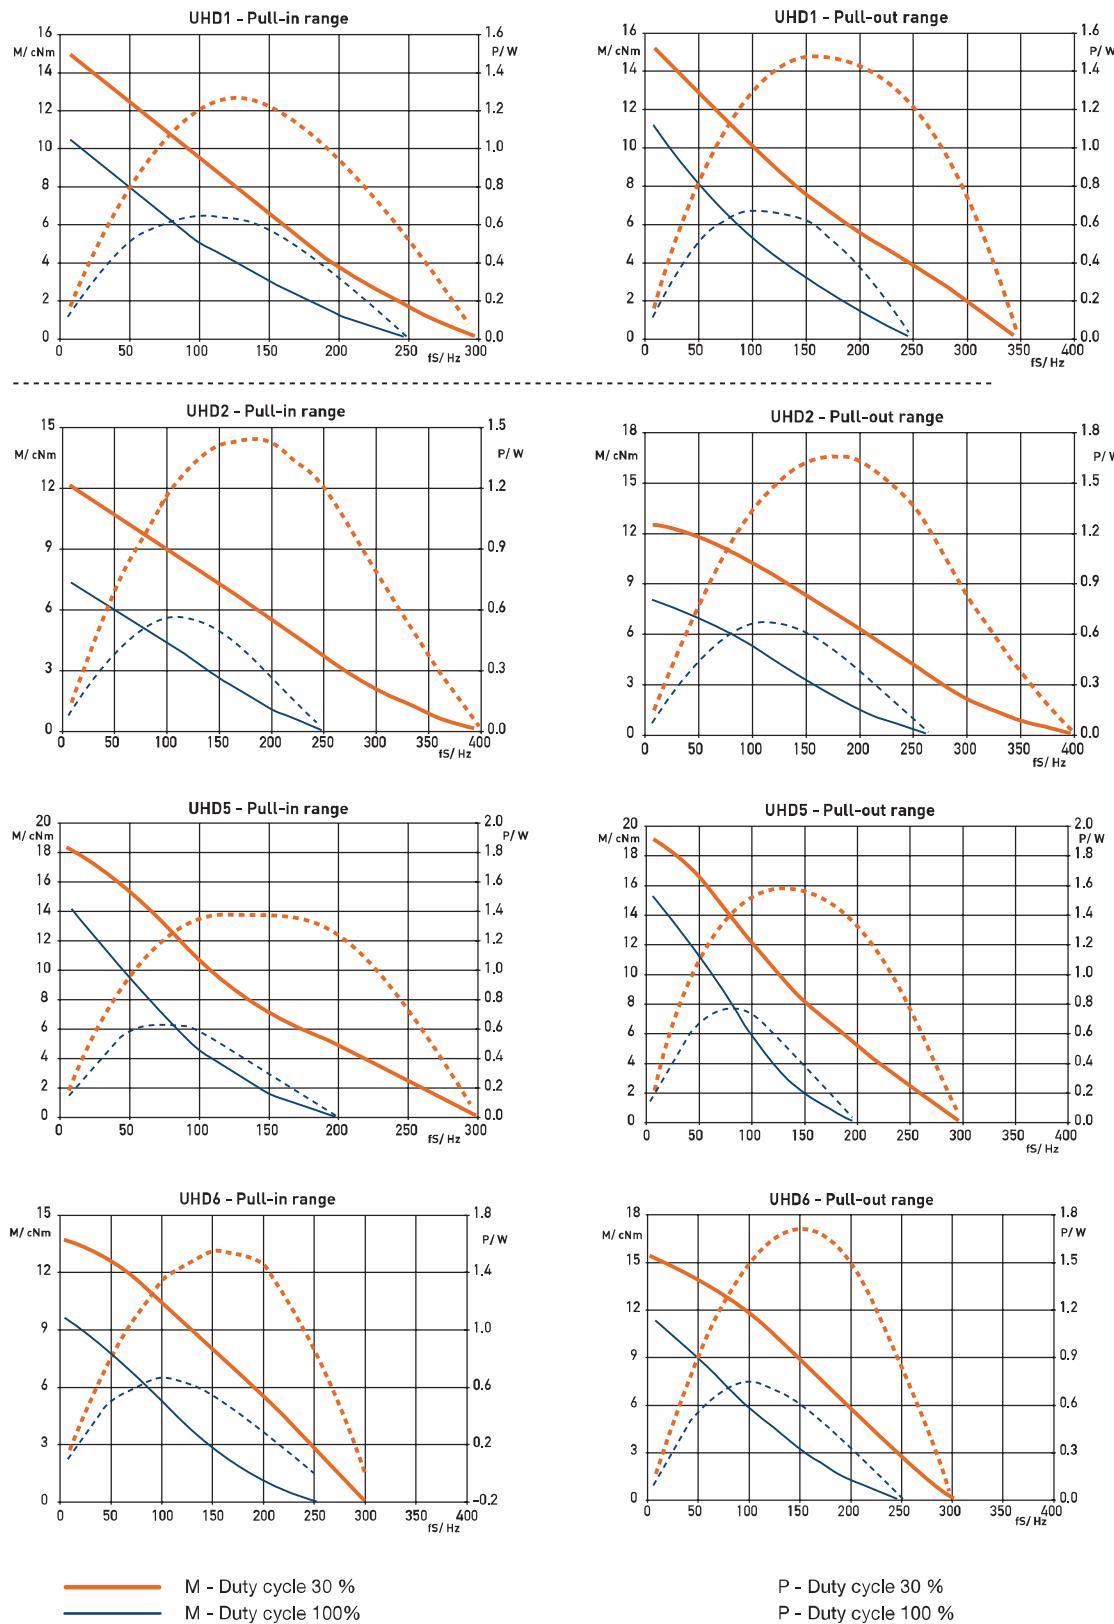


Technical Data UHD3/4/7/8

bipolar (UHD3/7)	Rated voltage U_N	V	12	24	48
	Resistance per winding R_{20}	Ω	20	108	460
	Holding torque	cNm	37,5 (UHD3); 45,5 (UHD7)		
	Detent torque M_s	cNm	3,4 (UHD3/4); 5,3 (UHD7/8)		
	Rotor inertia J_R	$g\text{cm}^2$	135 (UHD3/4); 141 (UHD7/8)		
unipolar (UHD4/8)	Rated voltage U_N	V	6	12	24
	Resistance per winding R_{20}	Ω	6,75	28,5	120
	Holding torque	cNm	27,5 (UHD4); 33,5 (UHD8)		
	Detent torque M_s	cNm	3,4 (UHD3/4); 5,3 (UHD7/8)		
	Rotor inertia J_R	$g\text{cm}^2$	135 (UHD3/4); 141 (UHD7/8)		
	Steps per revolution		48		
	Duty cycle		100%		
	Winding temperature T_{max}		130° C		
	Direction of rotation		reversible		

Dimensions

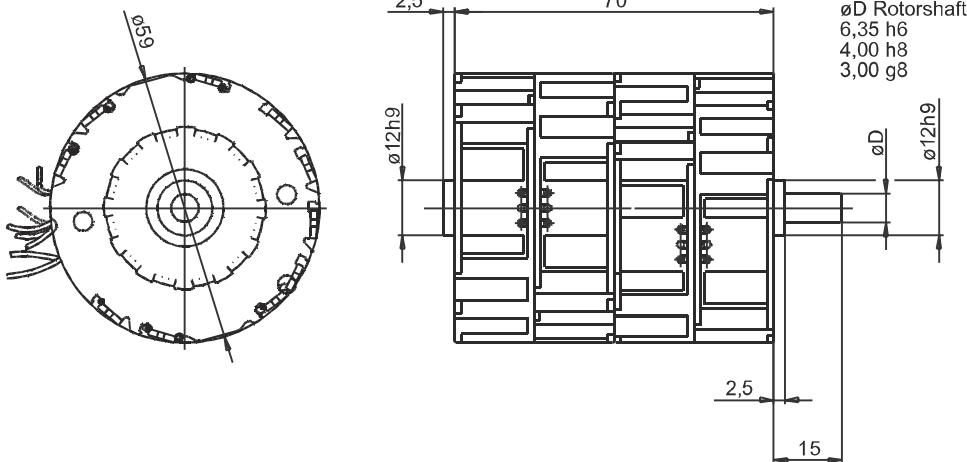

Performance Chart

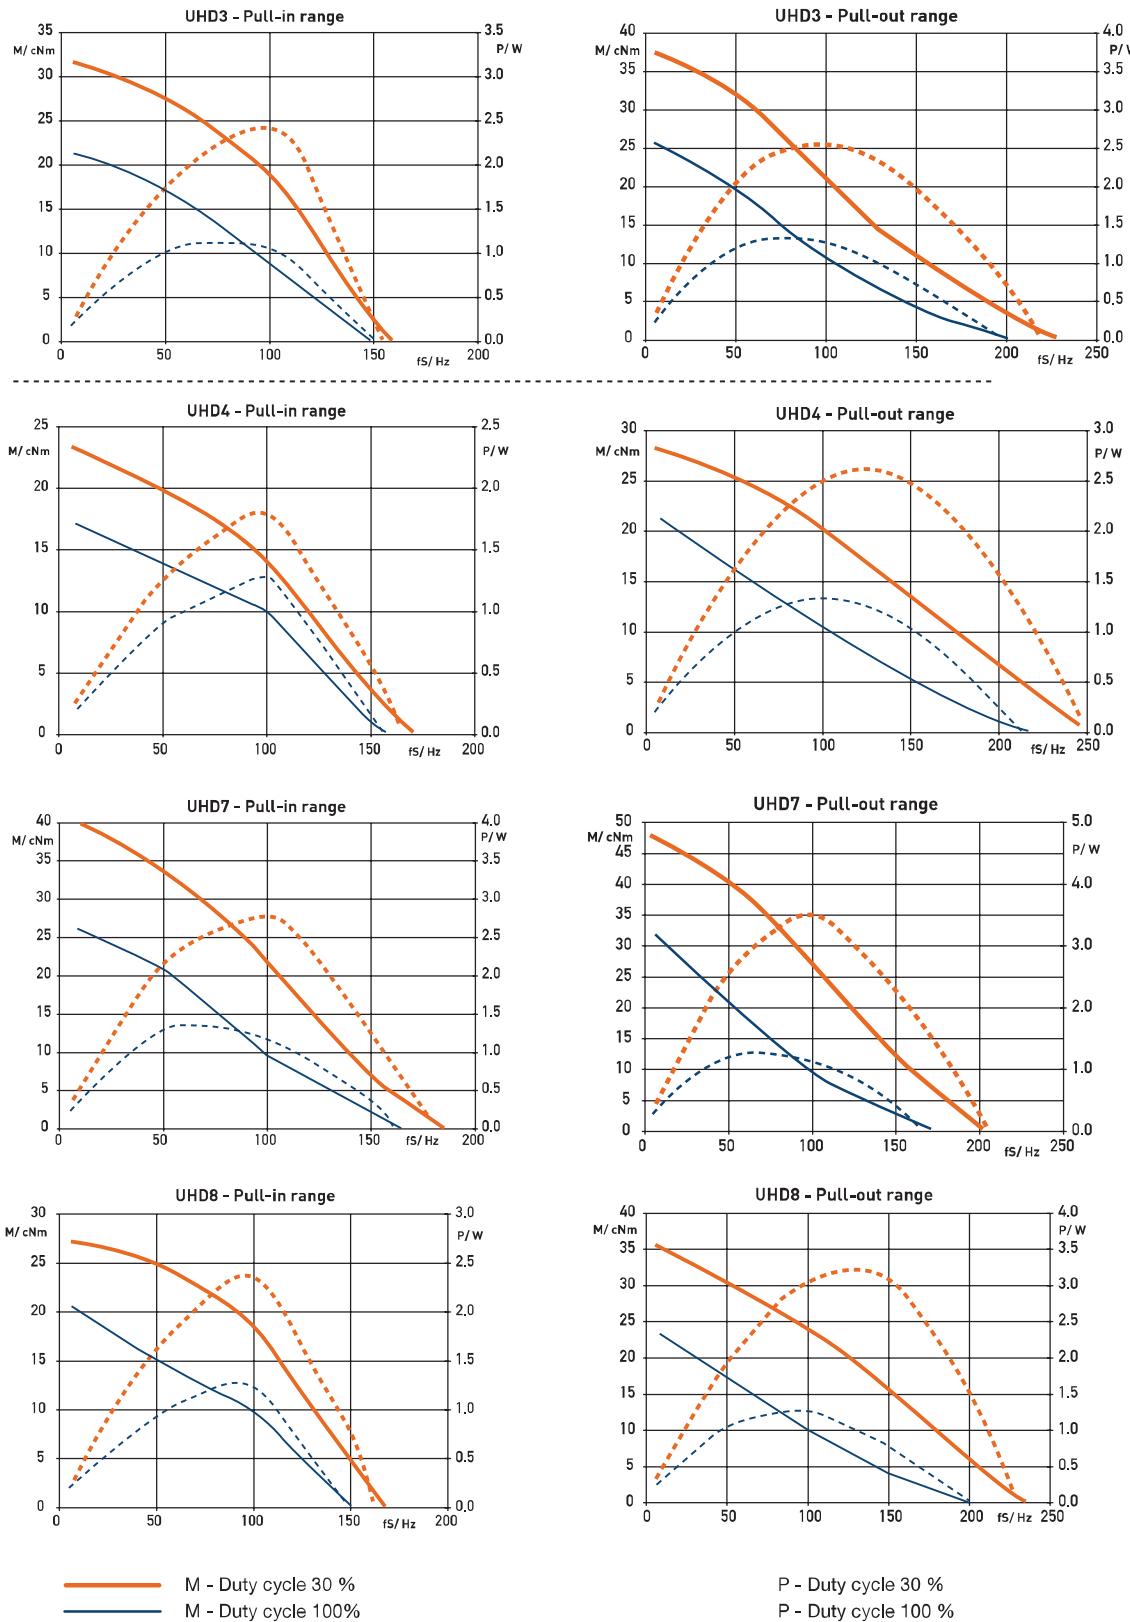

UP (ST6443; ST6444)

Dimensions (mm)	$\varnothing 64 \times 43$
Step angle (°)	7,5/11,25 (ST6443); 11,25 (ST6444)
Holding torque (cNm)	30–35 (ST6443); 45 (ST6444)
Detent torque (cNm)	2–2,5 (ST6443); 7 (ST6444)
Winding	bipolar
Gear combination	O, P, R

**Standard Data**

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15 ... +40
Ambient temperature storage	°C -20 ... +100
Thermal resistance at f=0 R _{therm}	29 K/W
Thermal class	B (ST6443); A (ST6444) according to DIN EN 60085
Approval	standard
Mounting	any position
Electrical connection	cable
Protection	IP 30 according to DIN EN 60529
Weight	500 g (ST6443); 550 g (ST6444)
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	Sintered bronze, self- lubricating


Order Reference

Type	Stepper Motor	ST6443 / ST6444	7,5°	3,7 Ω
Step angle	7,5° (ST6443) 11,25° (ST6443 / ST6444)			
Resistance	3,7 Ω			

Technical Data


bipolar (ST6443)	Rated voltage U _N	V	4,5	4,5
	Resistance per winding R ₂₀	Ω	3,7	
	Step angle	°	7,5	11,25
	Holding torque M _H	cNm	35	30
	Detent torque M _S	cNm	2,5	2
	Rotor inertia J _R	gcm ²	85	
	Steps per revolution		48	32
	Winding temperature increase	K	90	
	Current per winding	A	1,25	
	Inductance per winding	mH	10	9,5
	Power consumption	W	11,5	
	Driver mode		Chopper drive	
bipolar (ST6444)	Rated voltage U _N	V	4,5	
	Resistance per winding R ₂₀	Ω	3,7	
	Step angle	°	11,25	
	Holding torque M _H	cNm	45	
	Detent torque M _S	cNm	7	
	Rotor inertia J _R	gcm ²	180	
	Steps per revolution		32	
	Winding temperature increase	K	90	
	Current per winding	A	1,25	
	Inductance per winding	mH	8	
	Power consumption	W	11,5	
	Driver mode		Chopper drive	

Circuit diagram Motor connections - bipolar

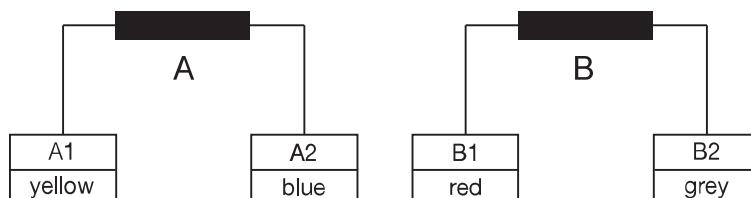

		clockwise rotation					
A	$\frac{A1}{A2}$	↓	↑	↑	↓	↓	
B	$\frac{B1}{B2}$	↑	↑	↓	↓	↑	


Dimensions

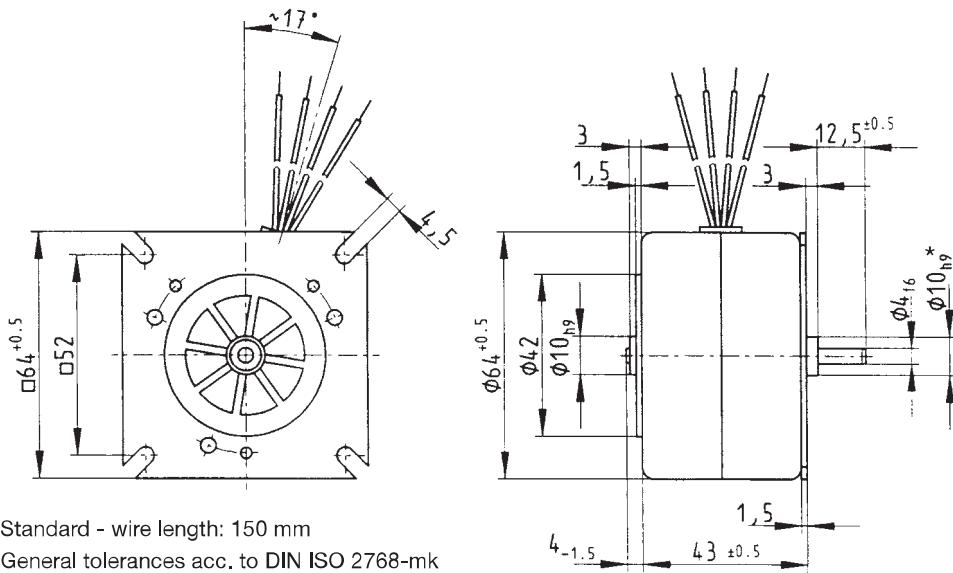


* on request 14h9

Performance Chart (chopper driver)


ST6443 UPD1 (ST6443/7,5/1)

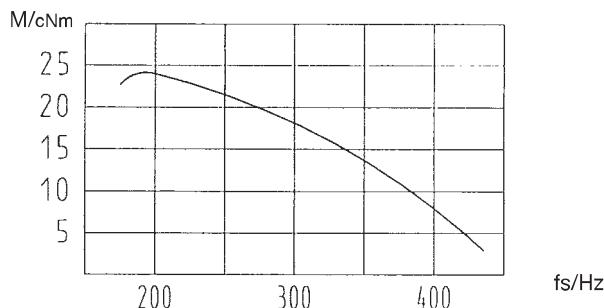


UPJ1 (ST 6443/11,25/1)

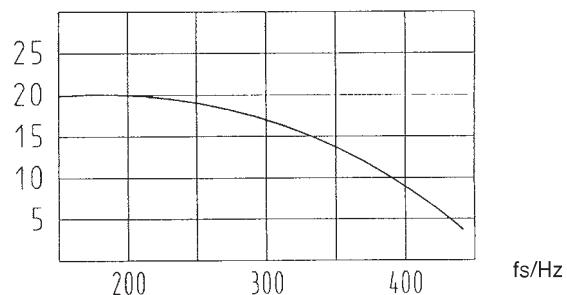

ST6444 UPJ5 (ST 6444/11,25)

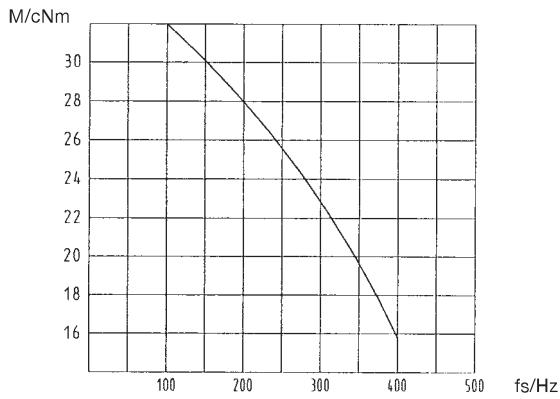

Gearboxes for Motors

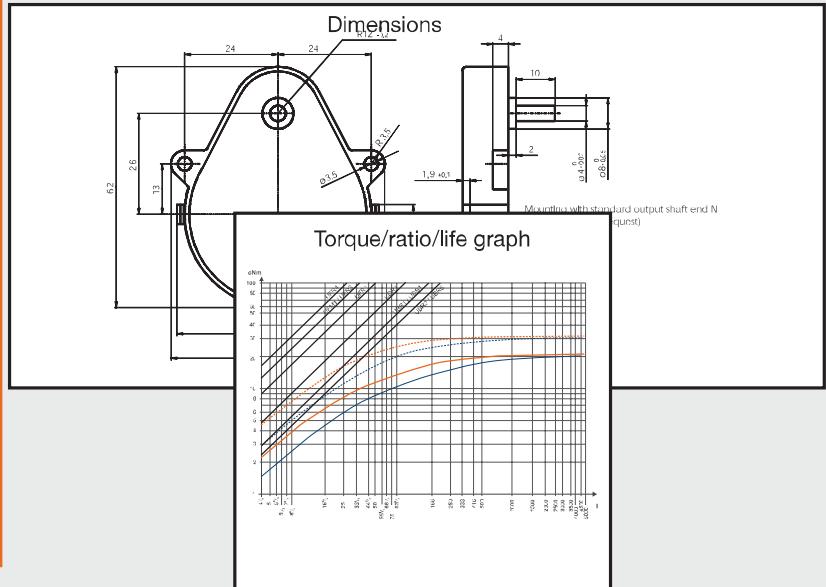

 JOHNSON
ELECTRIC

... innovating motion ...
www.contact-evolution.com

UGA

Dimensions (mm)	55 x 62
Height (mm)	12
Max. torque (cNm)	32
Ratios	4 1/6 ... 360.000
Internal slipping clutch	none
Standard shaft (mm)	Ø 4 x 10
Weight (g)	55
Motor combination	Series UB and UD; Series UF without UFR3/4 and UFB3/4



Standard Data


Mounting	any position
Axial thrust F_A	20 N
Lateral force F_R	60 N
Output shafts	Ø 4 x 10, other on request
Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	-15 ... +55° C
Ambient temperature storage	-40 ... +80° C

Ratios	4 1/6	5	8 1/3	10	12 1/2	15	16 2/3	20 5/6	25	30	31 1/4	33 1/3	37 1/2
	41 2/3	45	50	60	62 1/2	75	83 1/3	100	112 1/2	120	125	135	140 5/8
	150	166 2/3	187 1/2	200	250	277 7/9	300	375	416 2/3	450	500	600	625
	750	900	937 1/2	1000	1125	1200	1250	1500	1800	1875	2250	2500	3000
	3600	3750	4500	5000	5400	7200	7500	9000	11250	12000	12500	15000	18000
	18750	22500	27000	30000	36000	37500	45000	54000	60000	72000	75000	90000	108000
	112500	120000	135000	150000	180000	216000	240000	360000					


Order Reference

Type	Gearbox	UGA	100	N	N
Ratio	100				
Slipping clutch	N	Without slipping clutch			
Shaft end	N	Ø 4 x 10, other on request			


Dimensions

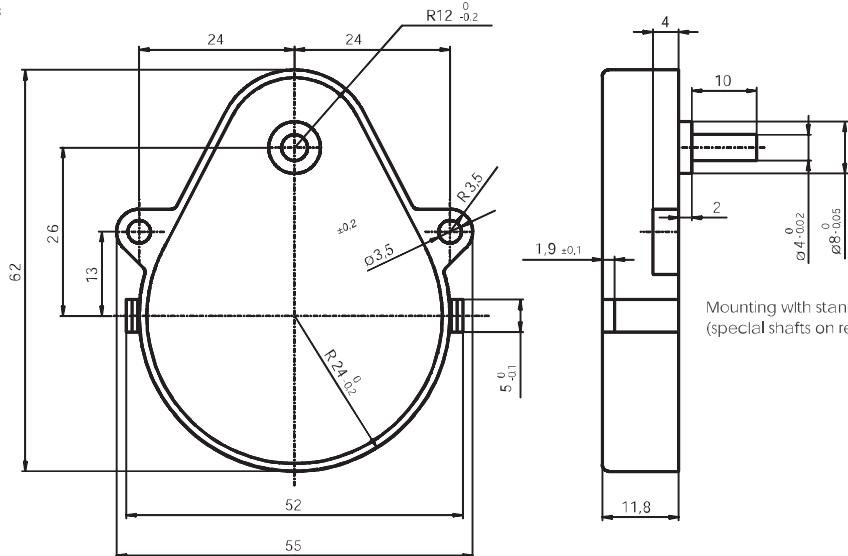


UDS 1..A

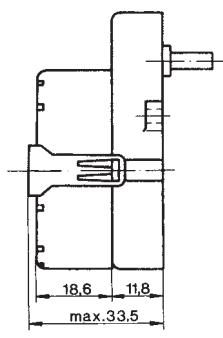


UBR 1/UBR 2..A

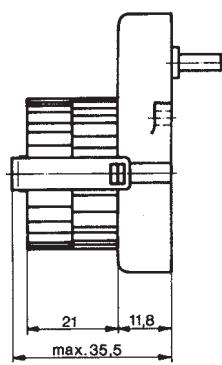


UDR 1..A

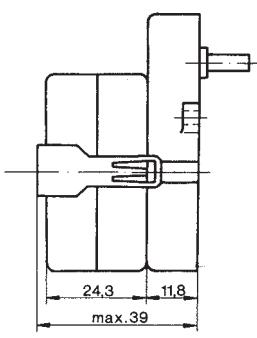

UFM 1/UFR 1..A

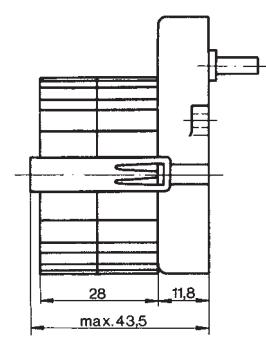

Torque / ratio / life graph

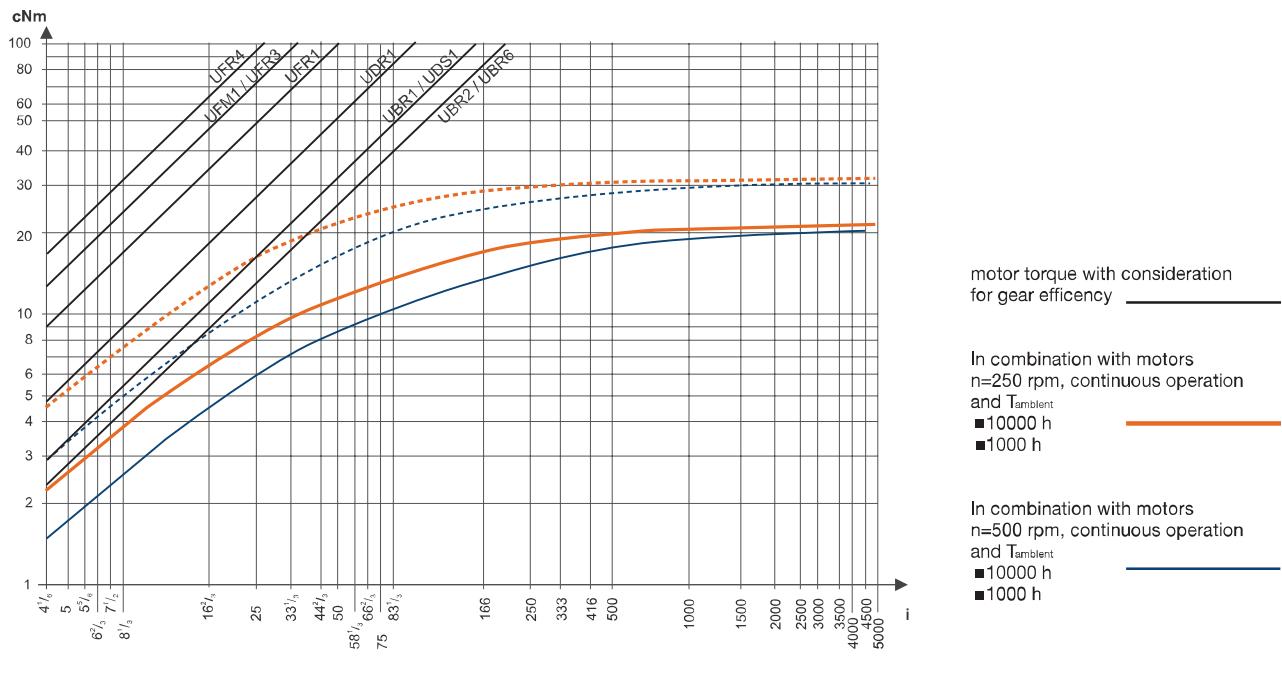

UGD

Dimensions (mm)	55 x 65,6
Height (mm)	13
Max. torque (cNm)	32
Ratios	4 1/6 ... 6.048.000
Internal slipping clutch	optional for ratios $\geq 33\frac{1}{3}$
Standard shaft (mm)	$\varnothing 4 \times 10$
Weight (g)	35
Motor combination	Series UB and UD; Series UF without UFR3/4 and UFB3/4



Standard Data


Mounting	any position
Axial thrust F_A	10 N
Lateral force F_R	50 N
Slipping clutches/free wheel	single-way clockwise/counter clockwise function and two way
Slipping-/free wheel torque	1 ... 40 cNm
Output shafts	$\varnothing 4 \times 10$, other on request
Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	$^{\circ}\text{C}$ -15 ... +55
Ambient temperature storage	$^{\circ}\text{C}$ -40 ... +80

Ratios	4 1/6	5	8 1/3	10	12 1/2	15	16 2/3	20 5/6	25	30	33 1/3	40	41 2/3
	45	50	60	62 1/2	83 1/3	100	120	125	150	166 2/3	200	250	300
	375	500	600	625	750	900	1000	1200	1500	1800	2000	2400	2500
	3000	3600	3750	4500	5000	6000	7500	9000	10000	15000	18000	21600	22500
	30000	36000	45000	54000	60000	72000	90000	108000	112500	120000	180000	216000	225000
	270000	300000	360000	432000	450000	720000	864000	1800000	5040000	6048000			


Order Reference

Type	Gearbox	UGD	100	N	5cNm	N
Ratio	100					
Slipping clutch	N Without slipping clutch					
	ER One-way slipping clutch, clockwise					
	EL One-way slipping clutch, counter clockwise					
	Z Two-way slipping clutch					
Slipping torque	5 cNm (for instance)					
Shaft end	N $\varnothing 4 \times 10$, other on request					


Dimensions

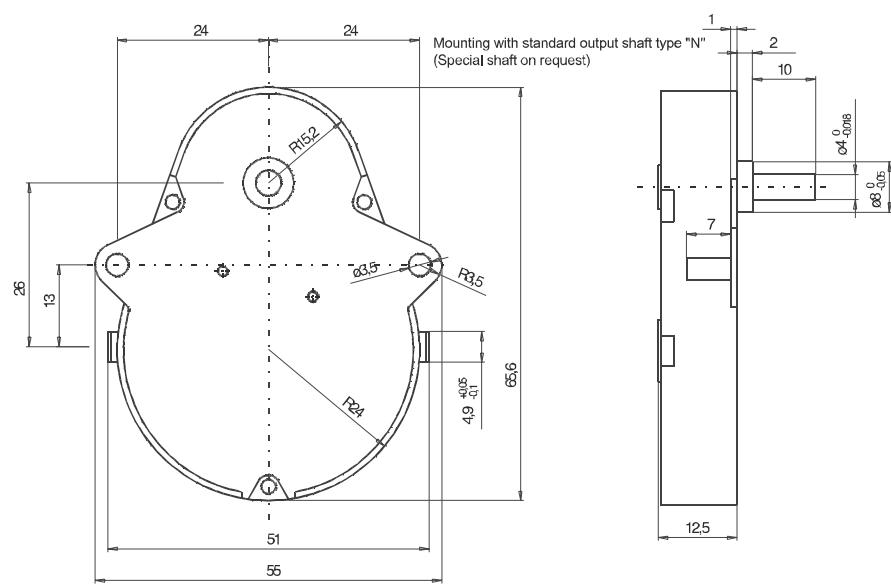


UDS 1..D

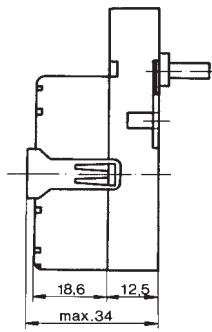


UBR 1/UBR 2..D

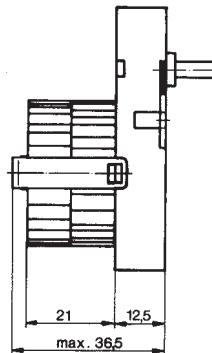

UDR 1..D

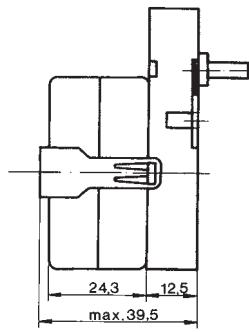


UFM 1/UFR 1..D

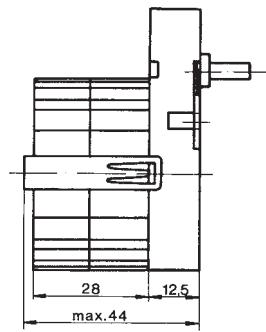

Slipping clutches

	max. torque available at output shaft (cNm)	free wheel-/clutch torque (cNm)
Roller-type free wheel	32	1
Single-way slipping clutches	32	4 ... 25 counter clockwise or clockwise function
Two-way slipping clutches	3 ... 15	4 ... 40

Torque / ratio / life graph

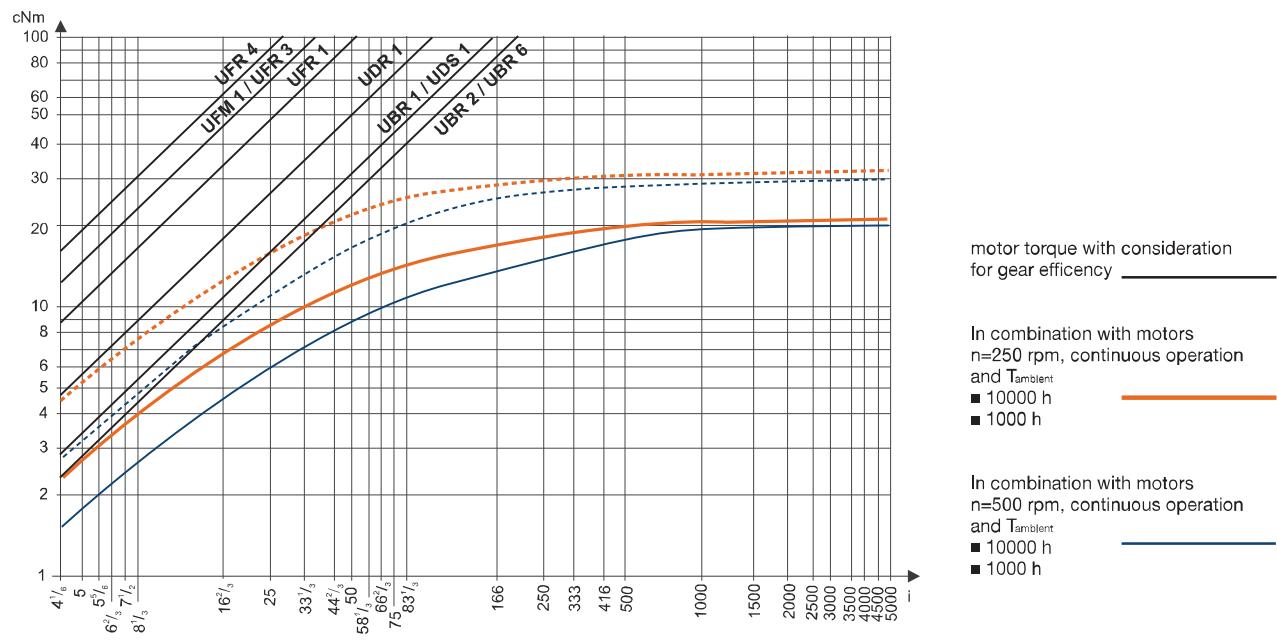

UGM

Dimensions (mm)	51 x 65.2
Height (mm)	15
Max. torque (cNm)	100
Ratios	12.5 ... 4800
Internal slipping clutch	none
Standard shaft (mm)	\varnothing 4 x 10
Weight (g)	45
Motor combination	Series UB and UD; Series UF without UFR3/4 and UFB3/4




Standard Data

Mounting	any position
Axial thrust F_A	20 N
Lateral force F_R	100 N
Output shafts	\varnothing 4 x 10, other on request
Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15 ... +60
Ambient temperature storage	°C -40 ... +80
Ratios	12 1/2 16 2/3 25 50 100 120 150 200 240 300 400 450 500 600
	750 1000 1200 1500 4800



Order Reference

Type	Gearbox	UGM	:	100	:	N	:	N
Ratio	100							
Slipping clutch	N	Without slipping clutch						
Shaft end	N	\varnothing 4 x 10, other on request						


Dimensions

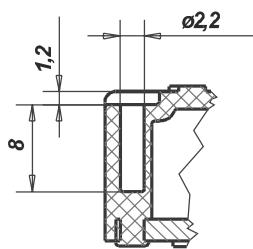


E22:1

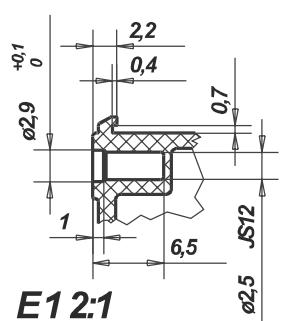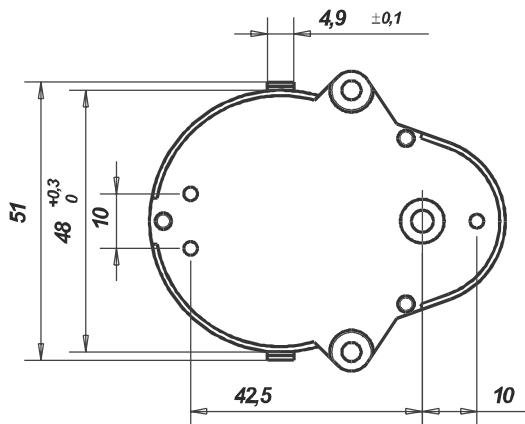


E12:1

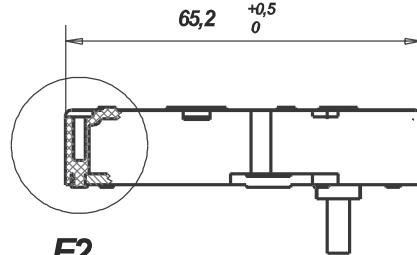





E2

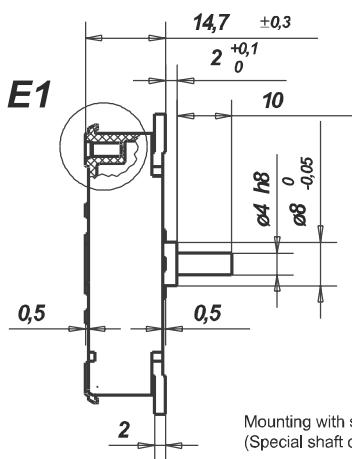


E1

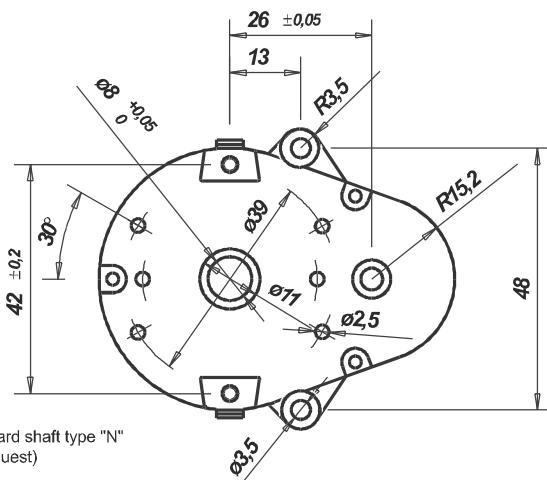

Mounting with standard shaft type "N"
(Special shaft on request)

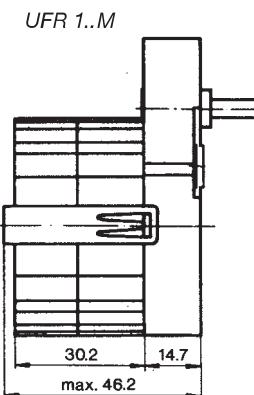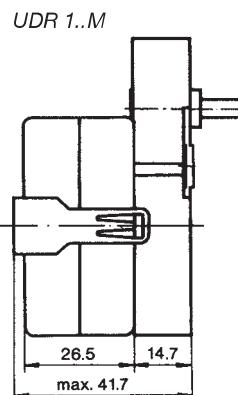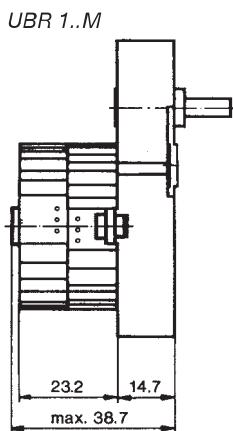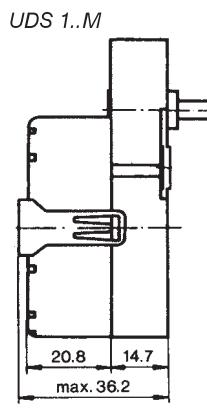

Torque / ratio / life graph

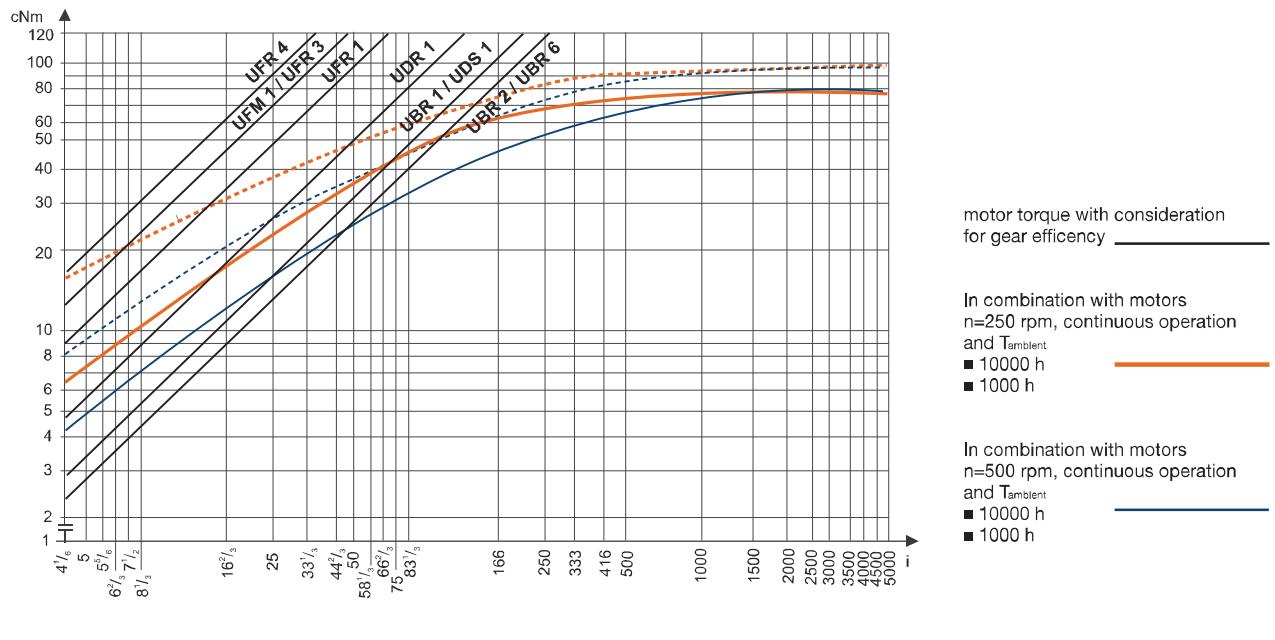



UGB

Dimensions (mm)	58 x 81
Height (mm)	17
Max. torque (cNm)	250
Ratios	41 ^{2/3} ... 345.600
Internal slipping clutch	optional
Standard shaft (mm)	Ø 8 x 12
Weight (g)	130
Motor combination	Series UB and UD; Series UF without UFR3/4 and UFB3/4



Standard Data

Mounting	any position
Axial thrust F _A	100 N
Lateral force F _R	300 N
Slipping clutches/free wheel	single-way clockwise/counter clockwise function and two way
Slipping-/free wheel torque	4 ... 175 cNm
Output shafts	Ø 8 x 12, other on request
Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15 ... +55
Ambient temperature storage	°C -40 ... +80
Ratios	41 ^{2/3} 83 ^{1/3} 100 125 150 166 ^{2/3} 200 250 300 500 600 750 900
	1000 1200 1500 1800 2000 2500 3000 3750 5000 6000 7500 12000 15000
	18000 30000 36000 60000 120000 266666 ^{2/3} 288000 320000 345600


Order Reference

Type	Gearbox	UGB	:	100	:	N	:	5cNm	:	N	:
Ratio	100										
Slipping clutch	N	Without slipping clutch									
	ER	One-way slipping clutch, clockwise									
	EL	One-way slipping clutch, counter clockwise									
	Z	Two-way slipping clutch									
Slipping torque		5 cNm									
Shaft end	N	Ø 8 x 12, other on request									


Dimensions

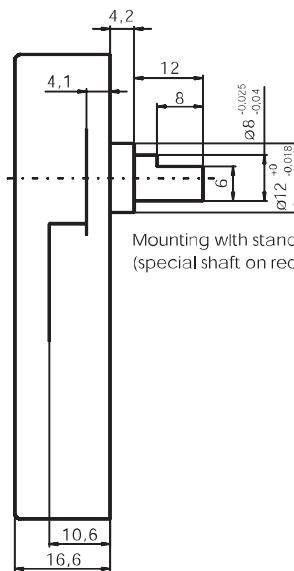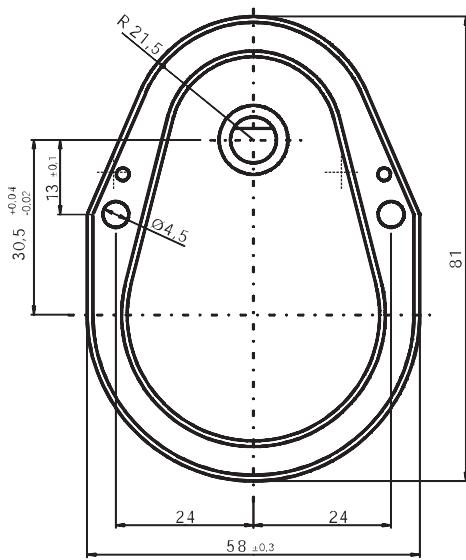


UDS 1..B

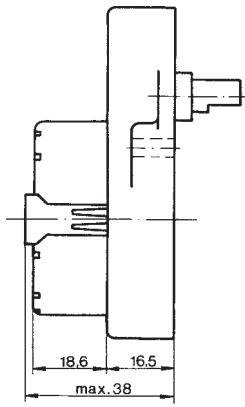


UBR 1/UBR 2..B

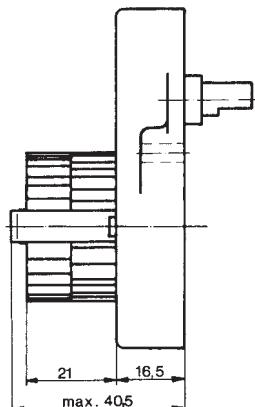

UDR 1..B

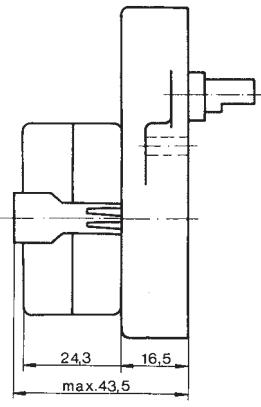


UFM 1/UFR 1..B

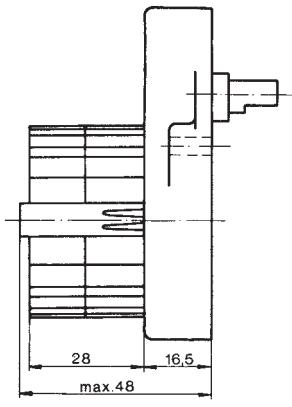

Slipping clutches

	max. torque available at output shaft (cNm)	free wheel-/clutch torque (cNm)
Roller-type free wheel		
Single-way slipping clutches	150	4 ... 50 counter clockwise or clockwise direction possible
Two-way slipping clutches	40 ... 70	60 ... 175

Torque / ratio / life graph

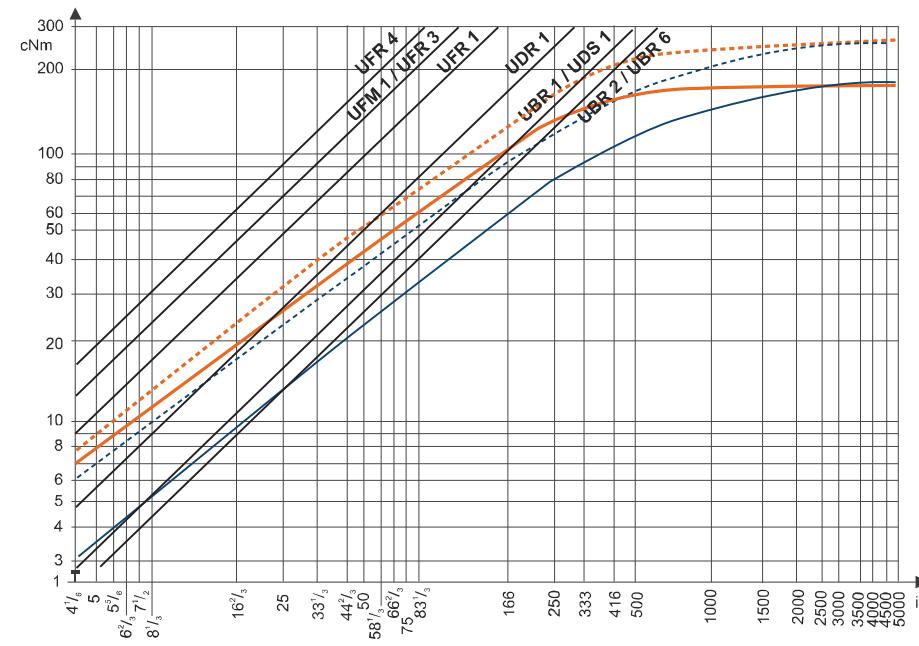

motor torque with consideration
for gear efficiency

In combination with motors
n=250 rpm, continuous operation
and T_{ambient}
■ 10000 h
■ 1000 h

In combination with motors
n=500 rpm, continuous operation
and T_{ambient}
■ 10000 h
■ 1000 h

UGF

UGF

Dimensions (mm)	58 x 81
Height (mm)	17
Max. torque (cNm)	500
Ratios	4 $\frac{1}{6}$... 5000
Internal slipping clutch	none
Standard shaft (mm)	\varnothing 8 x 12
Weight (g)	130
Motor combination	Series UB, UD, UF





Standard Data

Mounting	any position
Axial thrust F _A	100 N
Lateral force F _R	400 N
Slipping clutches/free wheel	none
Slipping-/free wheel torque	cNm
Output shafts	\varnothing 8 x 12, other on request
Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15 ... +55
Ambient temperature storage	°C -40 ... +80
Ratios	4 $\frac{1}{6}$ 8 $\frac{1}{3}$ 16 $\frac{2}{3}$ 20 $\frac{5}{6}$ 25 30 41 $\frac{2}{3}$ 50 62 $\frac{1}{2}$ 83 $\frac{1}{3}$ 100 125 166 $\frac{2}{3}$
	250 333 $\frac{1}{3}$ 500 600 750 1000 1200 1500 4000 5000


Order Reference

Type	Gearbox	UGF	'	100	'	N	'	N	'
Ratio	100								
Slipping clutch	N	Without slipping clutch							
Shaft end	N	\varnothing 8 x 12, other on request							


Dimensions

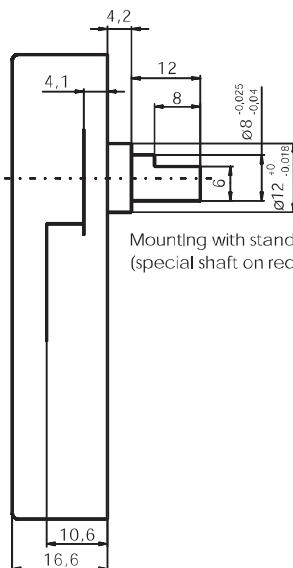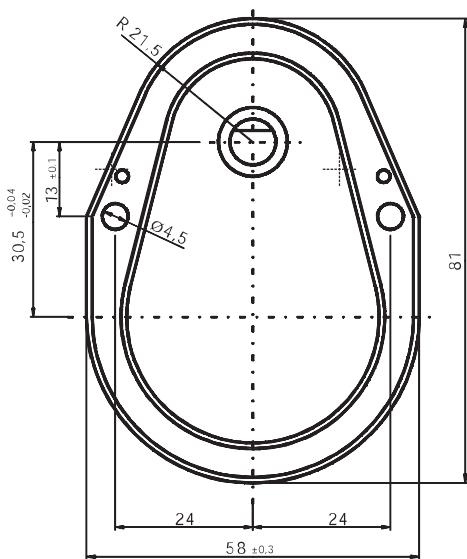


UDS 1..F

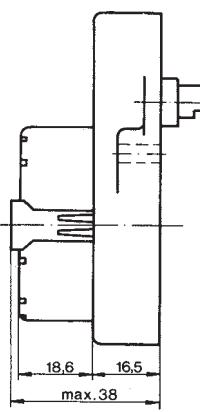


UBR 1/UBR 2..F

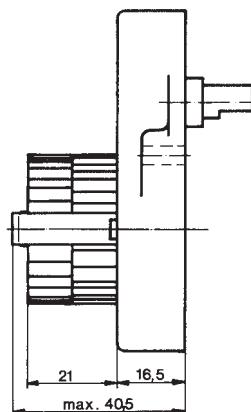


UDR 1..F

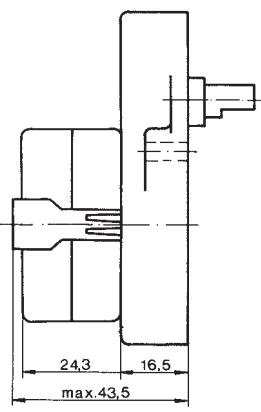


UFM 1/UFR 1..F

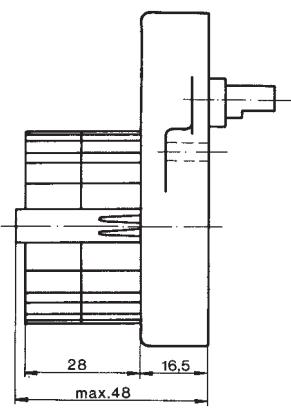


UFR 3..F

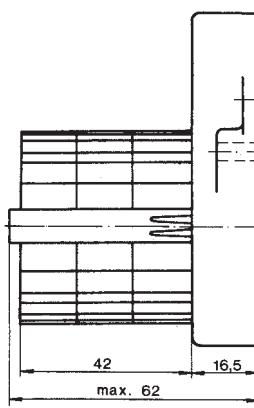

UFR 4..F

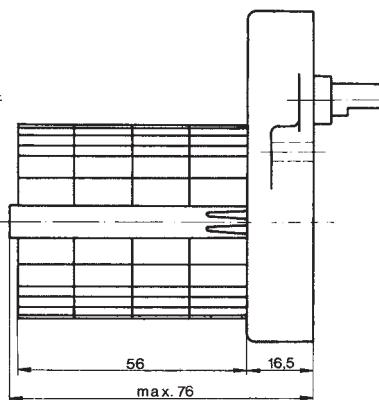

Torque / ratio / life graph

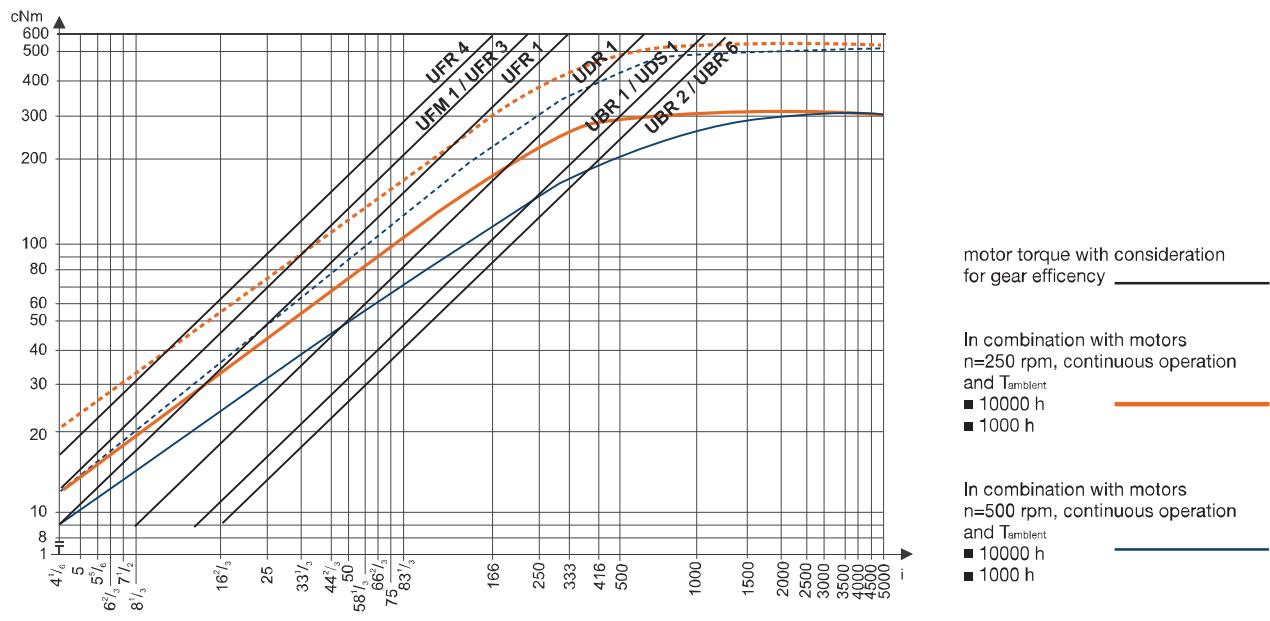

UGV

Dimensions (mm)	70 x 70
Height (mm)	17
Max. torque (cNm)	500
Ratios	8 ^{1/3} ... 2000
Internal slipping clutch	none
Standard shaft (mm)	Ø 8 x 12
Weight (g)	130
Motor combination	Series UB, UD, UF




Standard Data


Mounting	any position
Axial thrust F _A	100 N
Lateral force F _R	400 N
Output shafts	Ø 8 x 12, other on request
Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15 ... +55
Ambient temperature storage	°C -40 ... +80
Ratios	8 1/3 16 2/3 25 41 2/3 83 1/3 100 125 250 500 2000

Order Reference

Type	Gearbox	UGV	:	100	:	N	:	N
Ratio	100							
Slipping clutch	N	Without slipping clutch						
Shaft end	N	Ø 8 x 12, other on request						

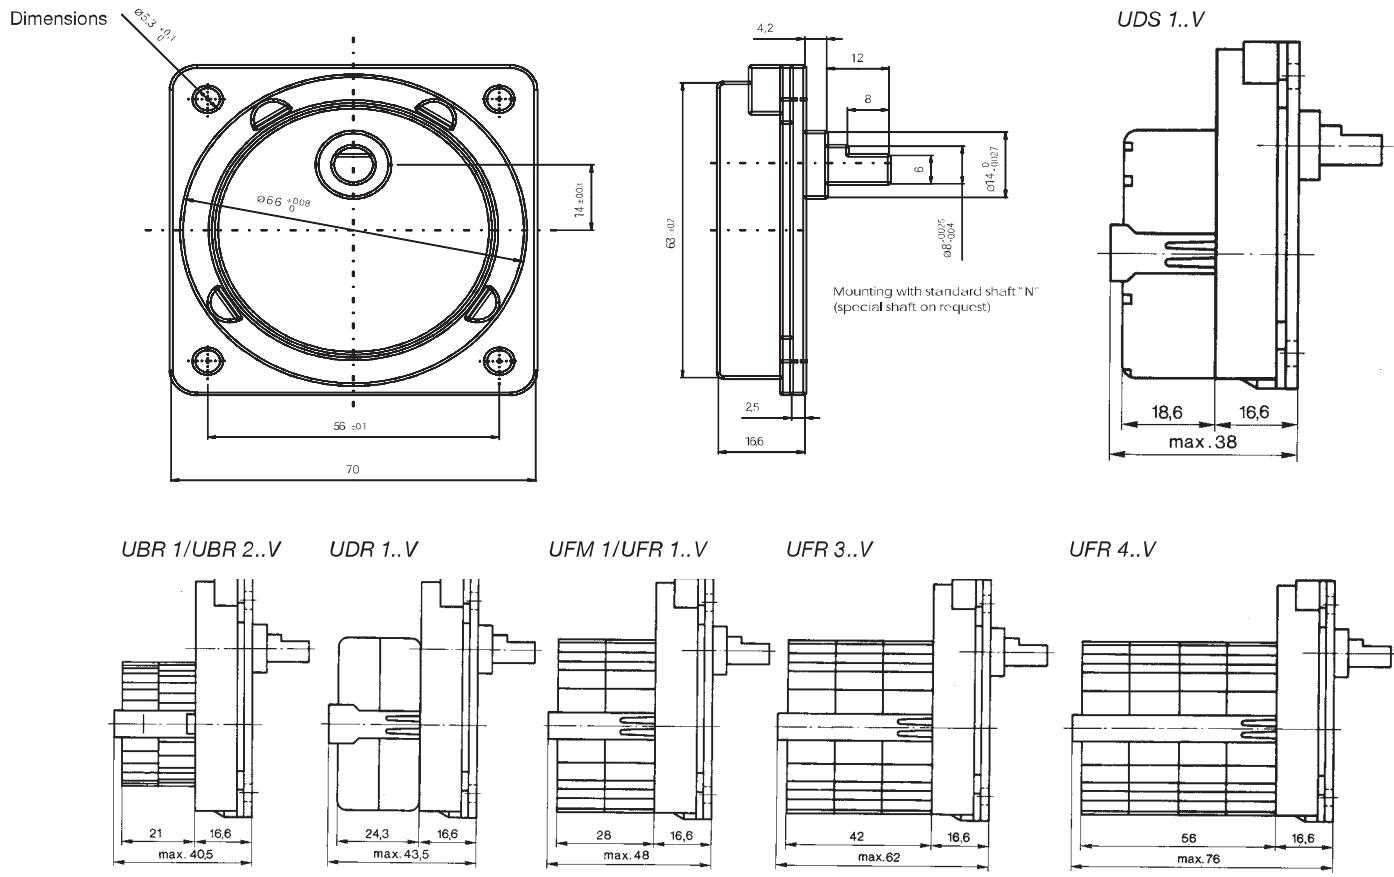

Torque / ratio / life graph

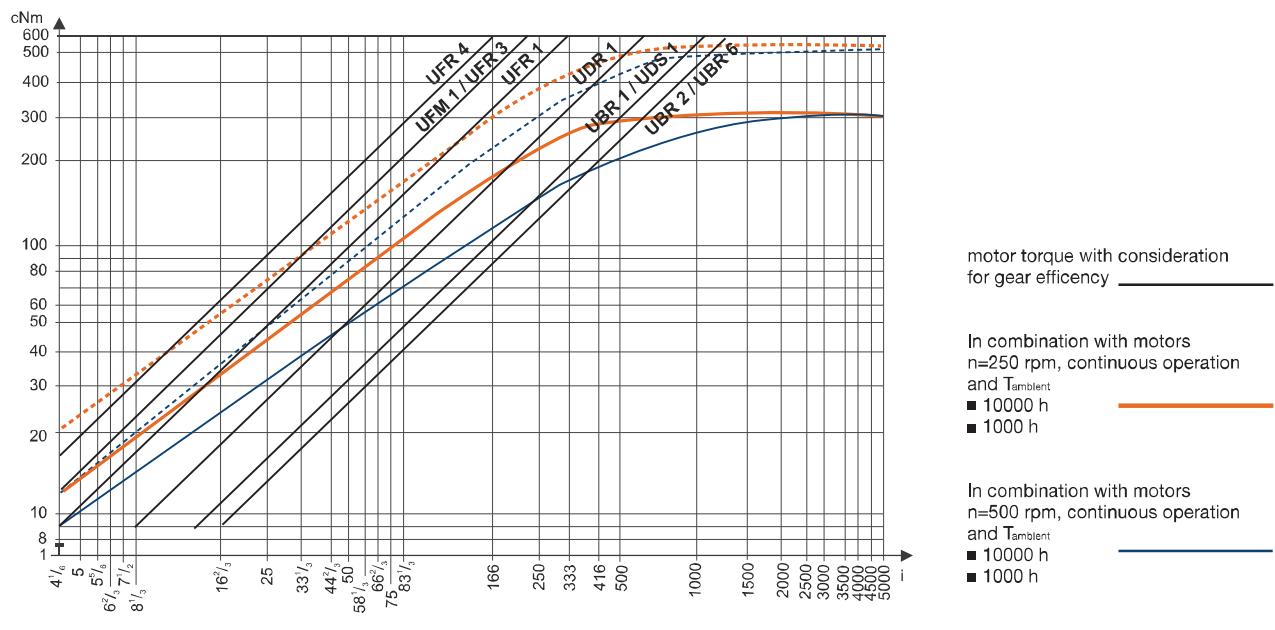

UGO/UGP

UGO/UGP (STG60/61)

Dimensions (mm)	65 x 65/68 x 68
Height (mm)	29,8–38
Max. torque (cNm)	600
Ratios	6 1/4 ... 5400
Internal slipping clutch	none
Standard shaft (mm)	Ø 8 x 22
Weight (g)	230–330
Motor combination	series UN, UO, UF and UP, UGO not with UPUO



UGO (STG 60)



UGP (STG 61)

Standard Data

Mounting	any position
Max. input speed*	3000 min ⁻¹
Max. output torque*	600 cNm
Max. input -and output power	please refer to table in Technical Data
Average back lash	unloaded 1,5 degree 2–4 stages with 6 Nm 3 degree 5–6 stages with 6 Nm 4 degree
Max. axial force F _A	30 N
Max. lateral force F _R , 12 mm from lange	80 N
Max. axial play	0,3 mm
Max. radial play	20 µm
Working temperature	0 ... +50 °C
Ambient temperature storage	-40 ... +100 °C
Ratio	6 1/4 12 1/2 18 3/4 37 1/2 46 7/8 62 1/2 93 3/4 125 150 187 1/2 375 750

* Depends on ratio, see next page

Order Reference

Type	Gearbox	STG60	UGO	6 1/4	1	1
Ratio	6 1/4					
shaft end	1	see next pages	drawings Dimension shaft end types			
	2					
	3					
	4					
fixing	1	through holes				
	2	threaded holes (only STG61)				
optional	motor pinion: see next pages		Motor Pinion Data			
	adaptor plate: see next pages		for adaptor plate			


Technical Data

Ratio	Stages *	η	pinion type	Weight	Max. torque (Nm)	Max. input speed (rpm)
6 1/4	2	0,77	1	190	1,0	750
12 1/2	3	0,68	2	220	1,8	750
18 3/4	3	0,68	3	220	2,7	750
37 1/2	3	0,68	4	220	5,4	750
46 7/8	4	0,60	3	250	6	750
62 1/2	4	0,60	2	250	6	1000
93 3/4	4	0,60	3	250	6	1500
125	4	0,60	2	250	6	2000
150	4	0,60	3	250	6	2400
187 1/2	4	0,60	4	250	6	3000
375	5	0,53	3	280	6	3000
750	5	0,53	4	280	6	3000
1500	6	0,46	4	310	6	3000
2000	6	0,46	4	310	6	3000
3750	6	0,46	4	310	6	3000
5400	6	0,46	5	310	6	3000


Technical Data valid for a working temperature 0 °C ... +50 °C

* Direction of rotation of output- and motor-shaft at
2,4 and 6 stages - same
3 and 5 stages - opposite


Dimensions shaft end types UGO/P (STG 60/61), other on request

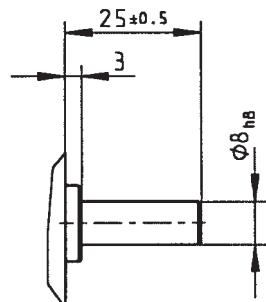


type 1 (standard)

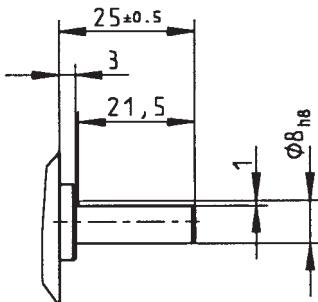

type 2

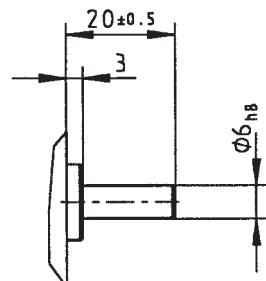


type 3

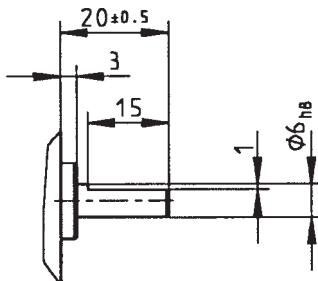

type 4


UGO/UGP

Dimensions UGO (STG 60)

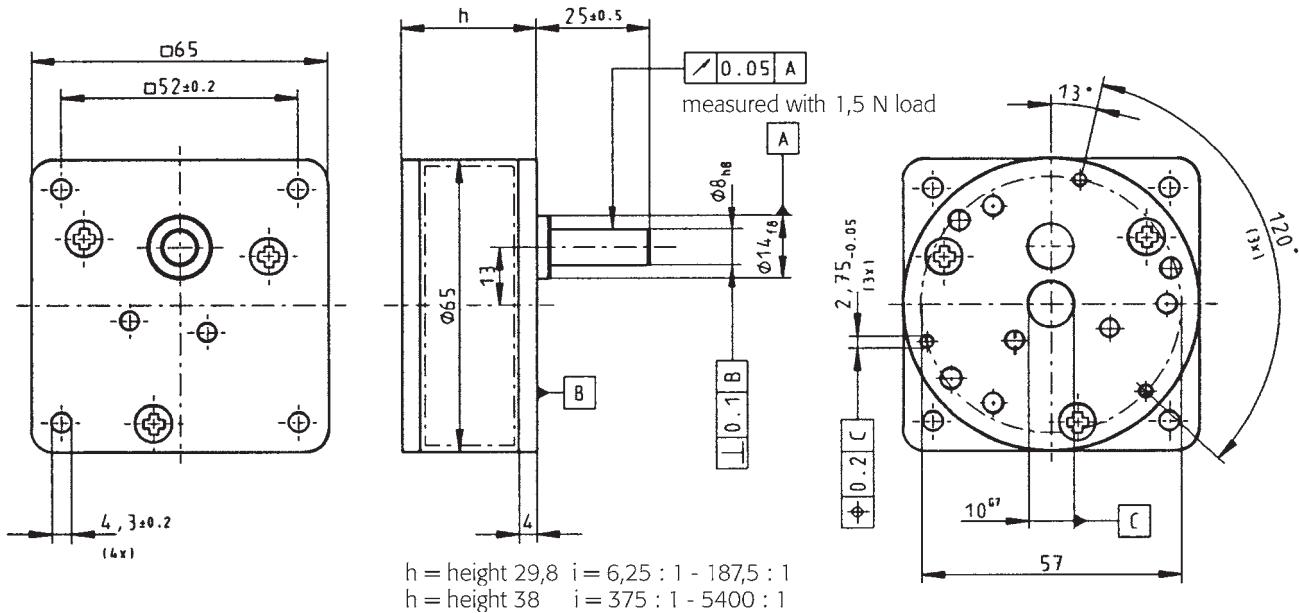

Gearboxes

UGP (STG 61)

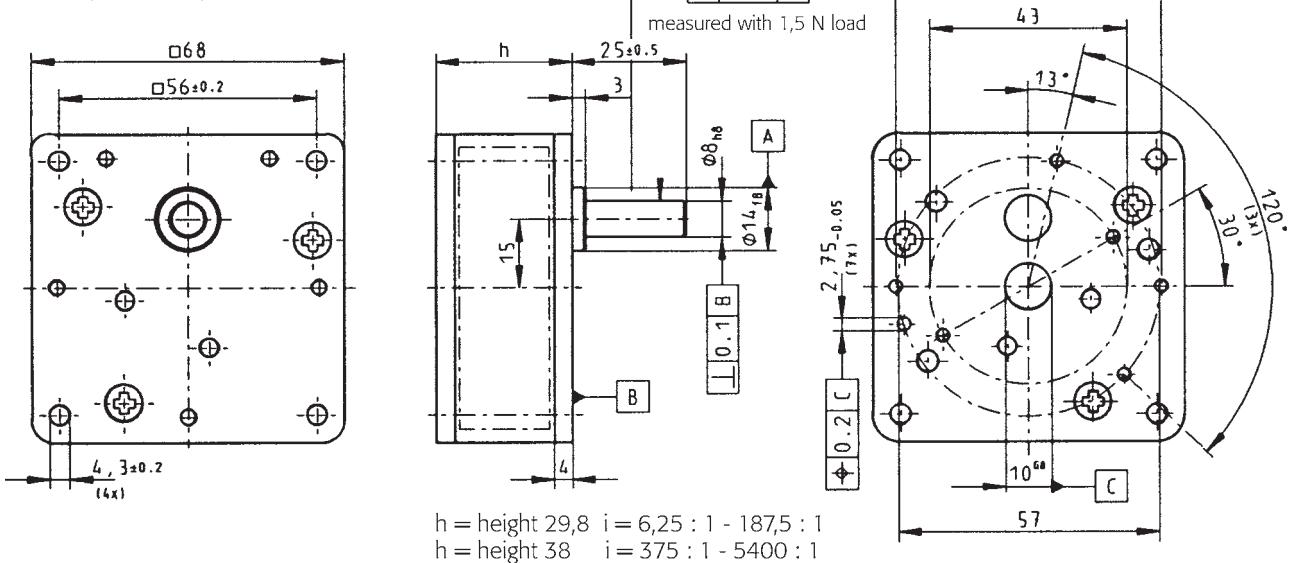



For fixing version 2 (threaded holes, see page before):

4 holes $d = 4,3$ are threaded holes M4

(only for UGP possible)

Motor Pinion Data UGO/P (STG 60/61)

pinion type	d	h	D	module	no. of teeth	Order Reference
1	2,5 ^{S7}	6	9.81	0.38	24	022-100-004-010
	13,0 ^{S7}	6	9.81	0.38	24	022-100-004-020
	4,0 ^{X7}	6	9.81	0.38	24	022-100-004-030
	5,0 ^{S7}	6	9.81	0.38	24	022-100-004-040
2	2,5 ^{S7}	4.5	9.81	0.38	24	022-100-004-070
	3,0 ^{S7}	4.5	9.81	0.38	24	022-100-004-080
	4,0 ^{X7}	4.5	9.81	0.38	24	022-100-004-090
	5,0 ^{S7}	4.5	9.81	0.38	24	022-100-004-110
3	2,5 ^{S7}	4.5	9.32	0.5	16	022-100-004-270
	3,0 ^{S7}	4.5	9.32	0.5	16	022-100-004-280
	4,0 ^{X7}	4.5	9.32	0.5	16	022-100-004-290
	5,0 ^{S7}	4.5	9.32	0.5	16	022-100-004-310
4	2,5 ^{S7}	4.5	8.23	0.42	16	022-100-004-580
	3,0 ^{S7}	4.5	8.23	0.42	16	022-100-004-590
	4,0 ^{X7}	4.5	8.23	0.42	16	022-100-004-600
	5,0 ^{S7}	4.5	8.23	0.42	16	022-100-004-610
5	2,0 ^{S7}	4.5	6.34	0.42	12	022-100-004-730
	2,5 ^{S7}	4.5	6.34	0.42	12	022-100-005-150
	3,0 ^{S7}	4.5	6.34	0.42	12	022-100-004-740

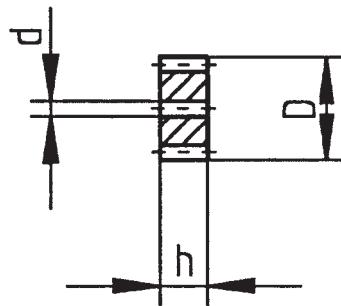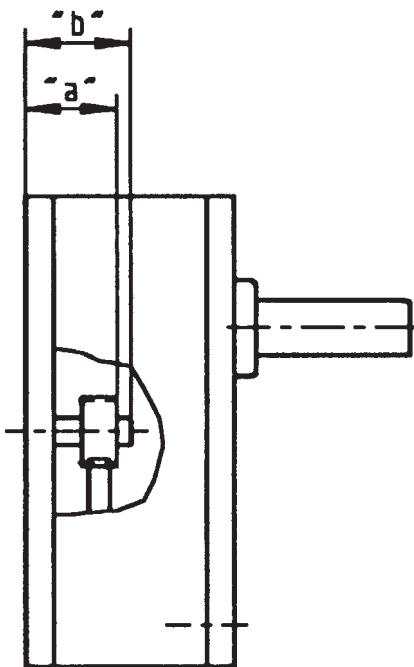

pinion position	Dimension	„a“	„b“
2 gear stages		8,9 _{-0,2}	9,6 _{-0,7}
3–6 gear stages		7,6 _{-0,2}	7,6 _{-0,2}

AP 60

AP 60

Dimensions (mm) Ø 64

Height (mm) 6


Adaptor Plate Data AP 60

Adaptor plate	Motor type	Manufacturer	Centring Ø D	Order Reference
AP 6012	G 30	Dunker	12	81B-001-002-010
AP 6022	G 42, GR 42		22	81B-001-002-016
AP 6014	M 28, M 32	GEFEG	14	81B-001-002-012
AP 6022	M 42, M 48		22	81B-001-002-016



Gearboxes

Dimensions

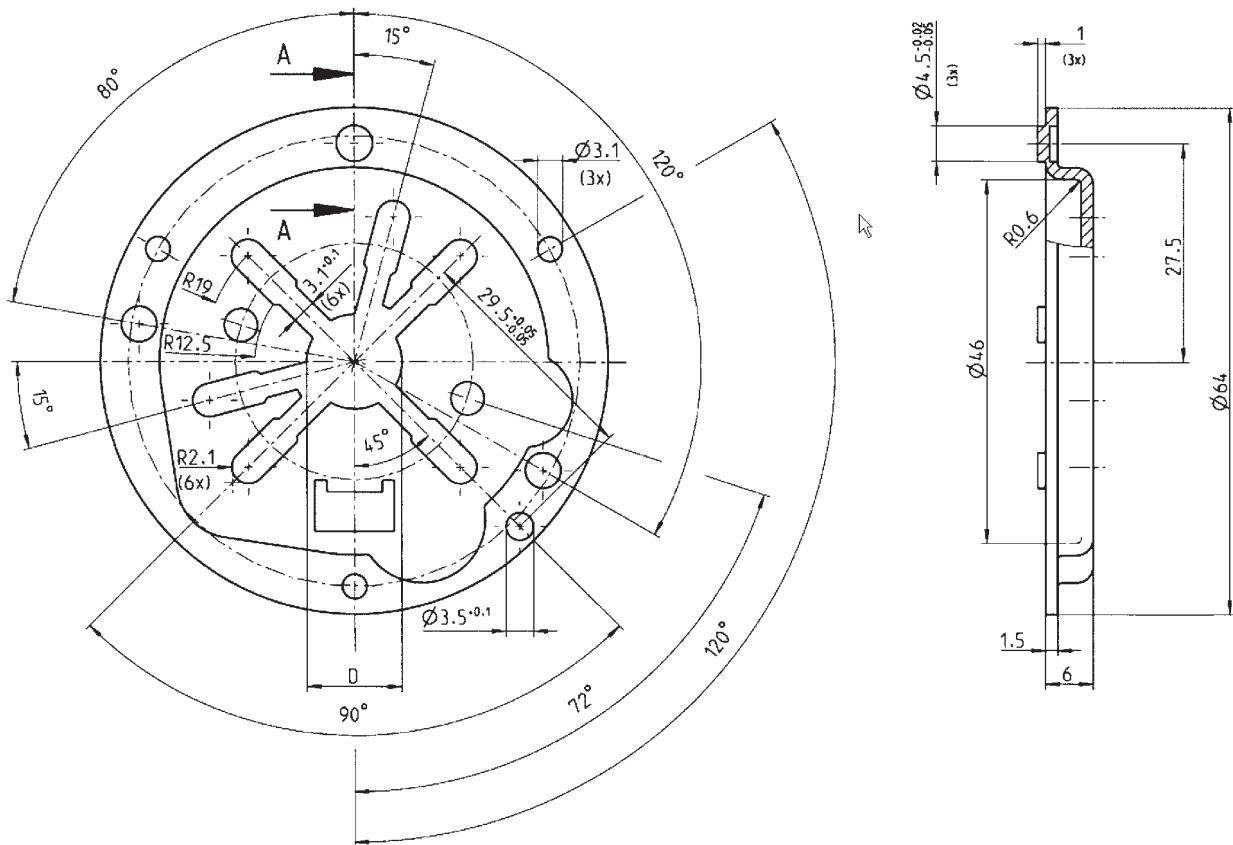

UGJ

Dimensions (mm)	65 x 107
Height (mm)	28
Max. torque (cNm)	1500
Ratios	4 1/6 ... 36.000.000
Internal slipping clutch	none
Standard shaft (mm)	Ø 12 x 20
Weight (g)	480
Motor combination	Series UB, UD, UF, UH




Standard Data

Mounting	any position												
Axial thrust F _A	400 N												
Lateral force F _R	600 N												
Output shafts	Ø 12 x 20, other on request												
Climatic class	wide-spread according to DIN IEC 60721-2-1												
Ambient temperature operation	°C -15 ... +55												
Ambient temperature storage	°C -40 ... +80												
Ratios	4 1/6	8 1/3	16 2/3	33 1/3	41 2/3	50	66 2/3	83 1/3	100	125	150	166 2/3	200
	250	500	1000	2000	2500	3000	4000	5000	6250	8333 1/3	10000	12500	15000
	20000	25000	30000	37500	60000	75000	120000	150000	300000	375000	750000	1500000	1800000
	2250000	3000000	3600000	4500000	6000000	9000000	11250000	12000000	18000000	36000000			

Order Reference



Type	Gearbox	UGJ	.	100	.	N	.	N
Ratio	100													
Slipping clutch	N	Without slipping clutch												
Shaft end	N	Ø 12 x 20, other on request												

Dimensions

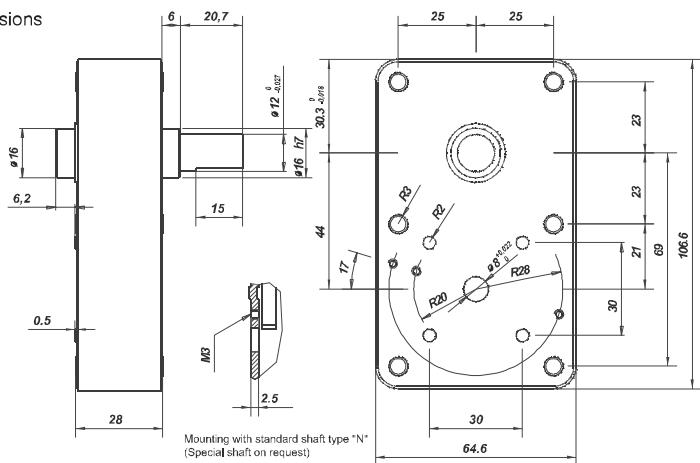


$i \geq 2000$

$i \geq 2500$

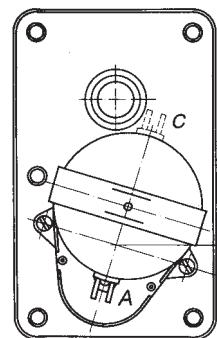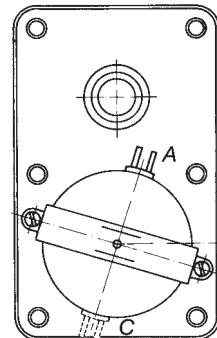


Lead outlet (A = standard position)


UDS 1..J, $i \leq 2000$

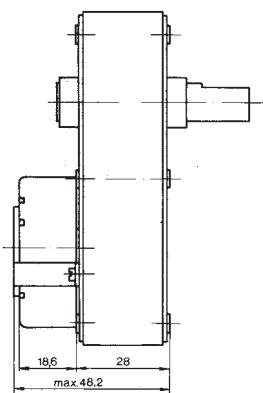


UDS 1..J, $i \geq 2500$

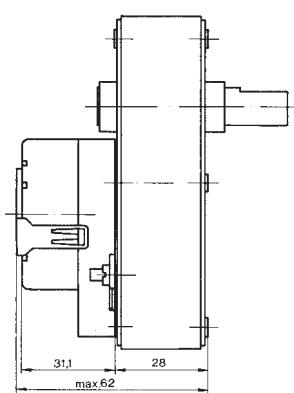


UBR 1/UBR 2..J, $i \geq 2500$

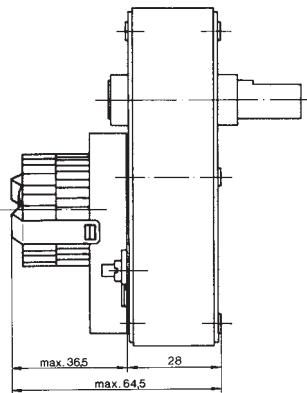


UDR 1..J, $i \leq 2000$

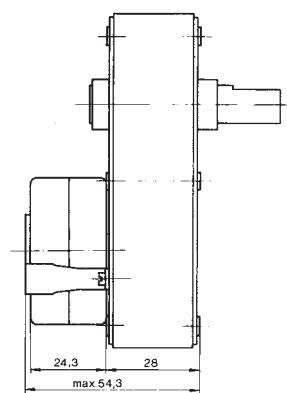


UDR 1..J, $i \geq 2500$

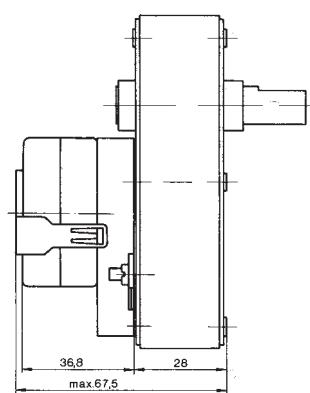


UFM 1/UFR 1..J, $i \leq 2000$

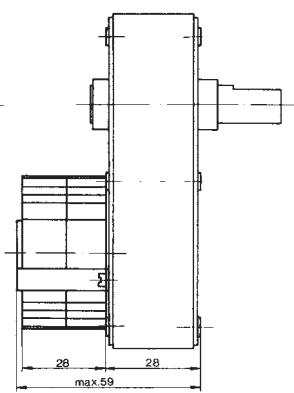


UFR 3..J, $i \leq 2000$

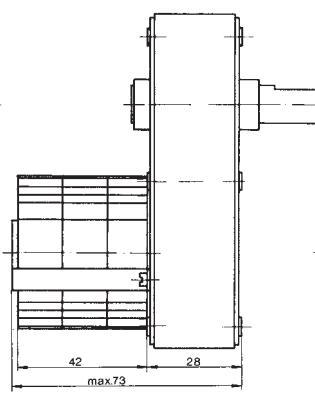

UFR 4..J, $i \leq 2000$

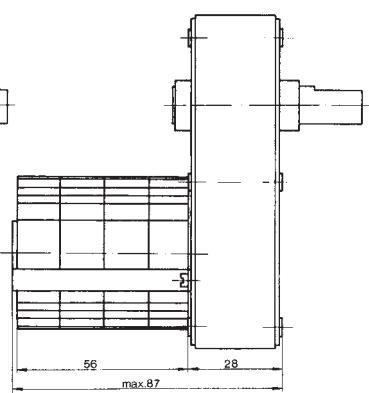

Torque / ratio / life graph

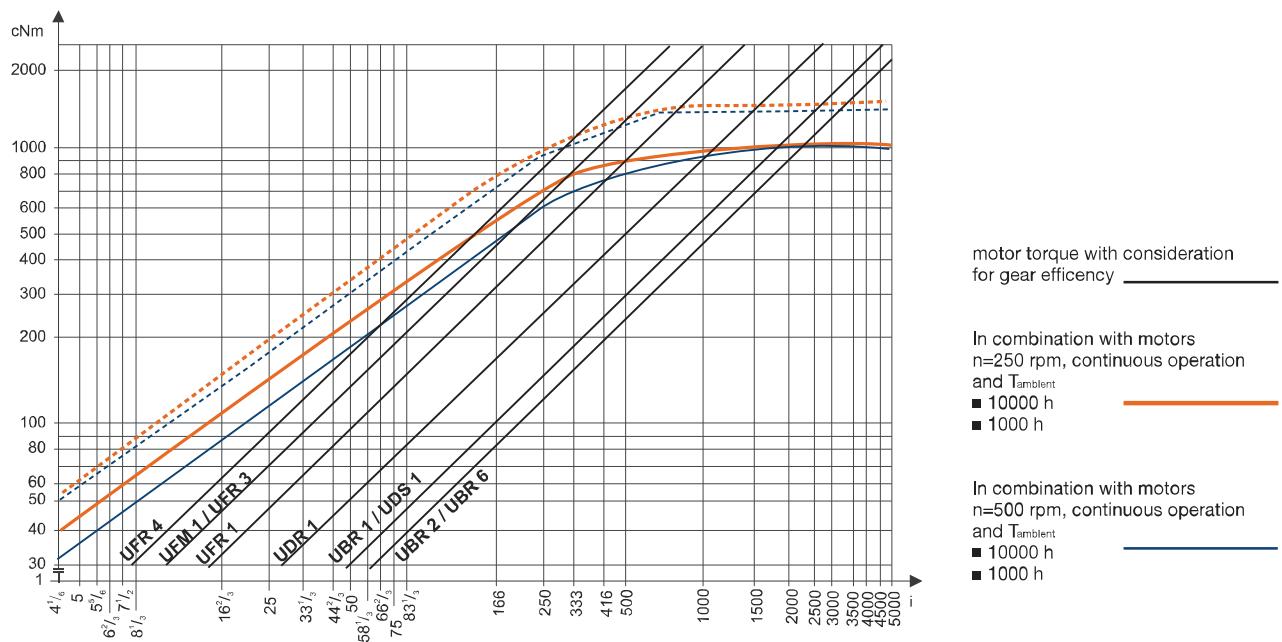

UGR (STG 200)

Dimensions (mm)	70 x 130
Height (mm)	38
Max. torque (cNm)	2000
Ratios	6 1/4 ... 375
Internal slipping clutch	none
Standard shaft (mm)	Ø 12 x 35
Weight (g)	depends on ratio
Motor combination	series UN, UO, UF and UP



Standard Data

Mounting	any position
Max. input speed *	3000 min ⁻¹
Max. output torque *	2000 cNm
Max. input -and output power *	please refer to table in Technical Data
Average back lash unload	0,75°
2/3 stages with 4/10 Nm	1,25°
4/5 stages with 15/20 Nm	2°
Max. axial force F _A	60 N
Max. lateral force F _R , 20 mm from lange	80 N
Max. axial play	0,3 mm
Max. radial play	83 µm
Working temperature	-10 ... +50 °C
Ambient temperature storage	-40 ... +100 °C

Ratio	6 1/4	12 1/2	25	37 1/2	62 1/2	75	93 3/4	125	375
-------	-------	--------	----	--------	--------	----	--------	-----	-----

* Depends on ratio, see next page

Order Reference

Type	Gearbox	STG 200 UGR	6 1/4
Ratio	6 1/4		
optional	motor pinion: see next pages	Motor Pinion Data	


Technical Data

Ratio	Stages *	η	pinion type	Weight	Max. torque (Nm)	Max. input speed (rpm)
6 1/4	2	0,77	1	560	1,8	750
12 1/2	2	0,77	2	560	3,6	750
25	3	0,68	3	580	6,6	750
37 1/2	3	0,68	4	580	9,9	750
62 1/2	4	0,60	5	600	14,6	750
75	4	0,60	6	600	17,5	750
93 3/4	4	0,60	6	600	20	820
125	4	0,60	6	600	20	1100
375	5	0,53	4	620	20	3000

Technical Data valid for a working temperature $-10^{\circ}\text{C} \dots +50^{\circ}\text{C}$

* Direction of rotation of output- and motor-shaft at
2 and 4 stages - same
3 and 5 stages - opposite



Dimensions other shafts on request

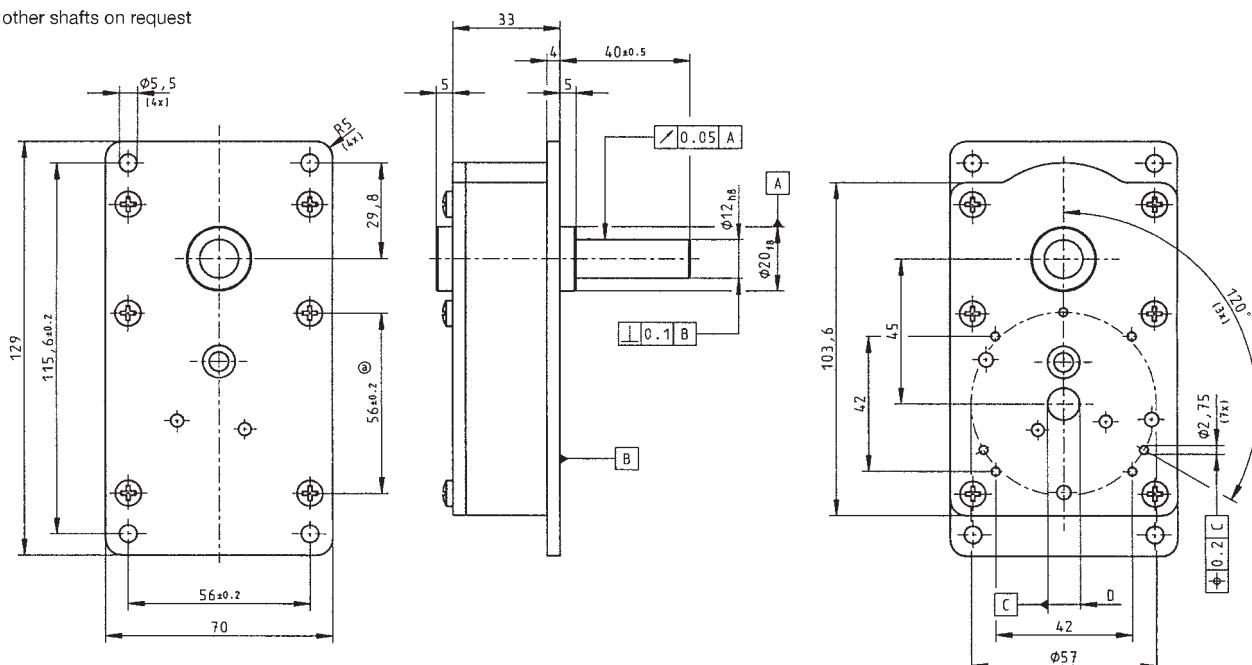

Diameter D = $14^{+0.08}_{-0.06}$ for ratio $i \leq 25$
 $10^{+0.08}_{-0.06}$ for ratio $i > 25$


Motor Pinion Data

pinion type	d	h	D	module	no. of teeth	Order Reference
1	4,0 ^{X7}	11,5	12,65	0,56	20	022-100-020-100
	5,0 ^{S7}	11,5	12,65	0,56	20	022-100-020-110
2	4,0 ^{X7}	11,5	9,11	0,53	14	022-100-020-130
	5,0 ^{S7}	11,5	9,11	0,53	14	022-100-020-140
3	3,0 ^{S7}	6,8	12,02	0,57	18	022-100-020-200
	4,0 ^{X7}	6,8	12,02	0,57	18	022-100-020-210
	5,0 ^{S7}	6,8	12,02	0,57	18	022-100-020-220
4	3,0 ^{S7}	6,8	9,32	0,5	16	022-100-020-280
	4,0 ^{X7}	6,8	9,32	0,5	16	022-100-020-290
	5,0 ^{S7}	6,8	9,32	0,5	16	022-100-020-300
5	3,0 ^{S7}	11,5	9,82	0,38	24	022-100-020-360
	4,0 ^{X7}	11,5	9,82	0,38	24	022-100-020-370
	5,0 ^{S7}	11,5	9,82	0,38	24	022-100-020-380
6	3,0 ^{S7}	11,5	9,32	0,5	16	022-100-020-400
	4,0 ^{X7}	11,5	9,32	0,5	16	022-100-020-410
	5,0 ^{S7}	6,8	9,32	0,5	16	022-100-020-300

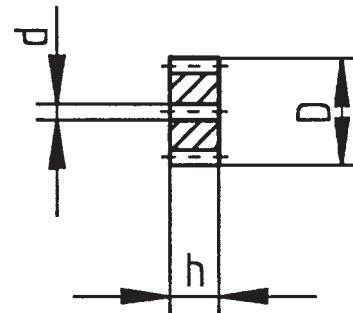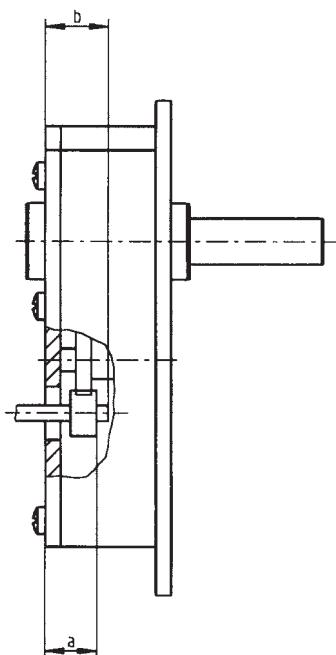

pinion position	Dimension	„a“	„b“ max.	„b“ min.
2 gear stages		16,1 _{-0,2}	28	10
3 gear stages		10,3 _{-0,2}	10,3	8,1
4 gear stages		15,1 _{-0,2}	15	8,1 (13,5 bei Ø 5)
5 gear stages		10,9 _{-0,2}	11	8,1

Synchronous Motors

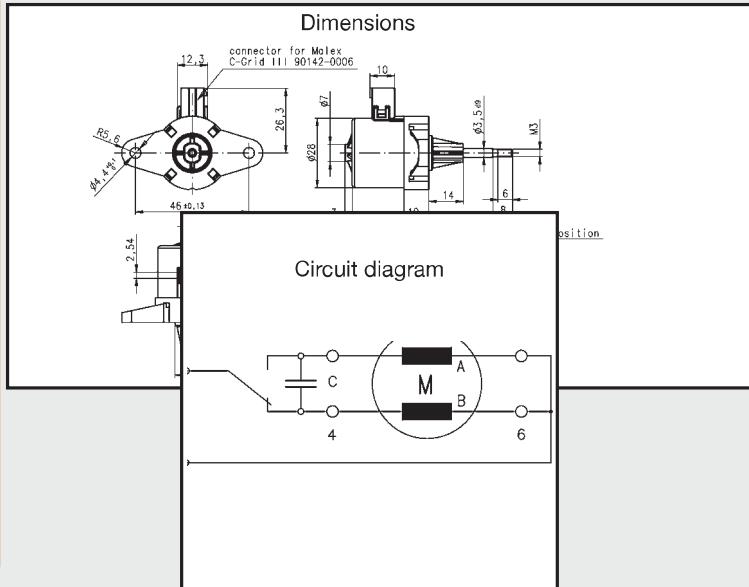

 JOHNSON
ELECTRIC

innovating motion

www.contact-evolution.com

UCC1/7

Dimensions (mm)	$\varnothing 28 \times 31$
Travel (mm)	10/13
Voltage (V) **	12–230
Thread pitch (mm)	1,0
Speed (mm/s)	
50 Hz	4,16
60 Hz	5
Pole number	24
Max. Force (N)*	35



* Depends on winding, frequency and lifetime required. Values for connector versions (C, D) / lead wire versions (N) up to 20 % lower.
Drive against end stops only permissible after clarification of operating conditions and approval by Saia motors.
Radial forces on the shaft will reduce life time and performance.

** regard circuit diagram and connector type

Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15 ... +60
Ambient temperature storage	°C -20 ... +100
Thermal resistance at $f=0$ R_{therm}	29 K/W
Thermal class	B according to DIN EN 60085
Winding coil temperature increase	K 60
Approval	standard
Mounting	any position
Electrical connection	connector type C, D, N
Protection	IP 40 according to DIN EN 60529
Weight	67 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	ball bearing


Order Reference

Type	Synchronous Motor	UCC	13	N	24 V / 50 Hz	B	1A
Configuration	13 standard magnet	73	stronger magnet				
Approval	N						
Voltage/frequency	see next pages						
Connection	C see pages 174, „Connection Types“						
	D						
Shaft	1B Travel 13 mm $\pm 0,7$ mm (others on request)						

Technical Data


bipolar	Rated frequency	Hz	50
	Axial speed	mm/s	4,16
	Tolerance of voltage		standard power supply system +10% / -10%
	Linear travel max.	mm	10/13
	Axial play at ± 20 N force	mm	< 0,25
	Duty cycle		100 %
	Winding temperature T_{max}		130
Capacitors	Rated voltage U_N	V	12 24 110
	Operating capacitor C_{50}	$\mu F/V\sim$	18/20 4,7/40 0,33/200

Circuit diagram Parallel circuit 12 V, 24 V, 48 V

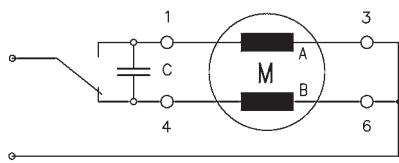


Parallel circuit 230 V (only for connector N)

with 110 V motor and resistor R_V

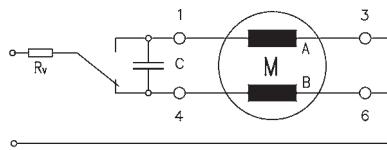


$R_V = 5,6 \text{ k}\Omega, 3 \text{ W}$

Series circuit 110 V (only for connector N)

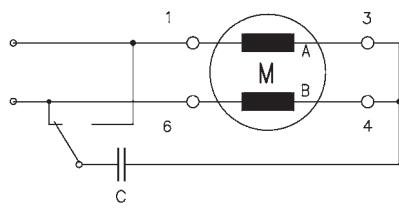

Parallel circuit 230 V (only for connector N)

with 110 V motor and capacitor C_V

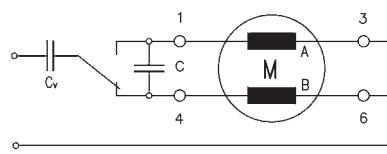

$C_V = 0,33 \mu F, 250 \text{ VAC}$


switch to

1 Pull (in)

4 Push (out)

6 Push (out)
(for series circuit)

Dimensions Version with Connector D, with 13 mm travel

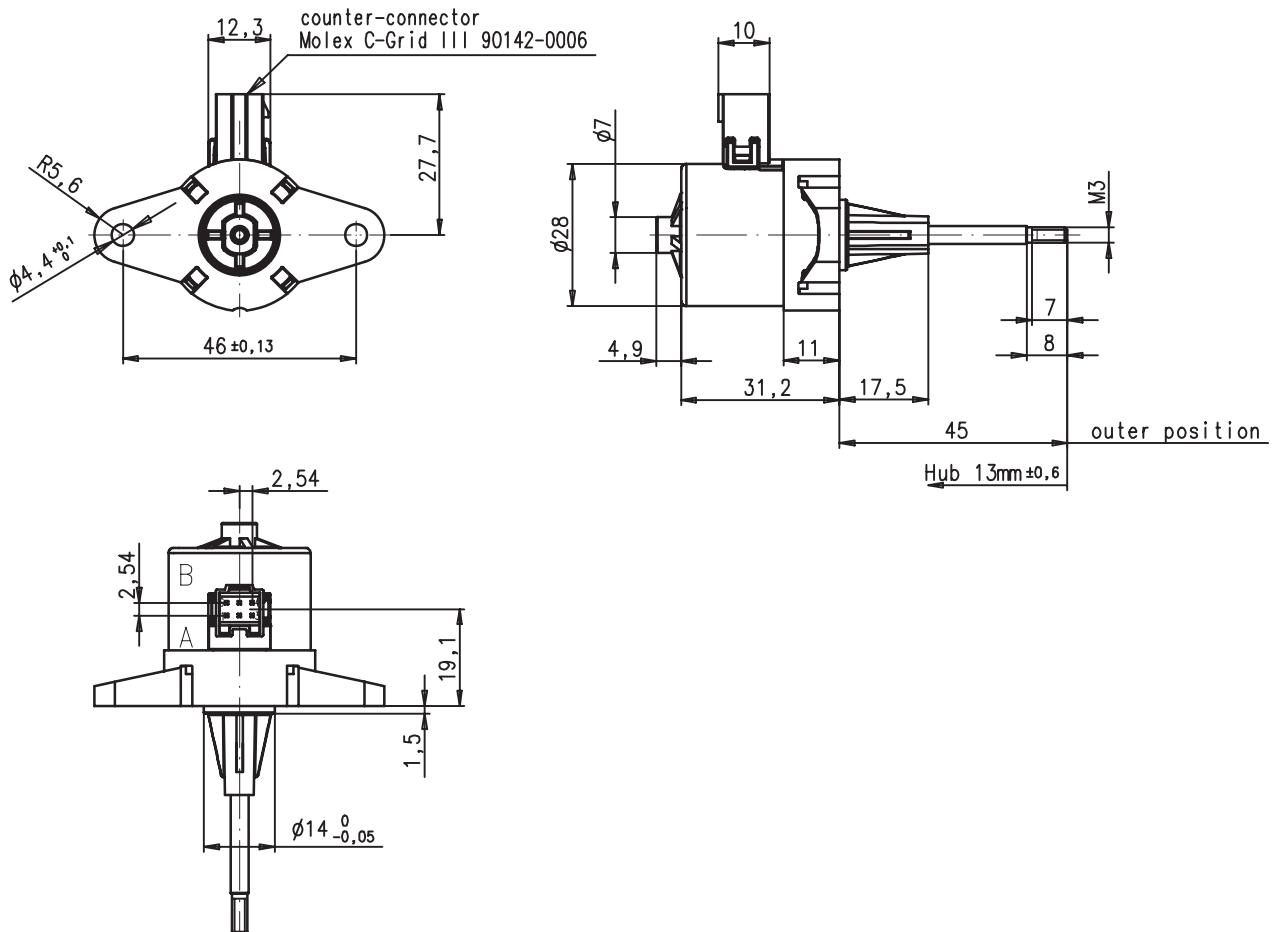

UCK 1/7

Dimensions (mm)	$\varnothing 28 \times 31$
Travel (mm)	10/13
Voltage (V) **	12–230
Thread pitch (mm)	1,0
Speed (mm/s)	
50 Hz	8,33
60 Hz	10
Pole number	12
Max. Force (N)*	35



* Depends on winding, frequency and lifetime required. Values for connector versions (C, D) / lead wire versions (N) up to 20 % lower.
Drive against end stops only permissible after clarification of operating conditions and approval by Saia motors.

Radial forces on the shaft will reduce life time and performance.

** regard circuit diagram and connector type

Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15 ... +60
Ambient temperature storage	°C -20 ... +100
Thermal resistance at f=0 R _{therm}	29 K/W
Thermal class	B according to DIN EN 60085
Winding coil temperature increase	K 60
Approval	standard
Mounting	any position
Electrical connection	connector type C, D, N
Protection	IP 40 according to DIN EN 60529
Weight	67 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	ball bearing


Order Reference

Type	Synchronous Motor	UCK	13	N	24 V / 50 Hz	D	1A
Configuration	13 standard magnet	73	stronger magnet				
Approval	N						
Voltage/frequency	see next page						
Connection	C see pages 174, „Connection Types“						
	D						
Shaft	1B Travel 13 mm ± 0,7 mm (other on request)						


Technical Data

Rated frequency	Hz	50
Speed	mm/s	8,33
Tolerance of voltage		standard power supply system +10% / -10%
Linear travel max.	mm	10/13
Axial play at 20 N force	mm	< 0,25
Duty cycle		100 %
Winding temperature T_{max}		130
Capacitors	Rated voltage U_N	12 24 110
	Operating capacitor C_{50}	22/20 5,6/40 0,27/200

Circuit diagram Parallel circuit 12 V, 24 V, 48 V

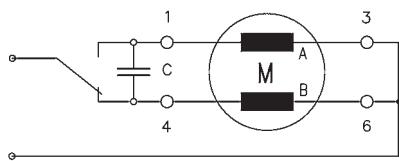


Parallel circuit 230 V (only for connector N)
with 110 V motor and resistor R_V

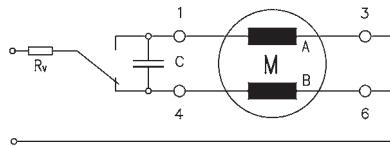


$R_V = 5,6 \text{ k}\Omega, 3 \text{ W}$

Series circuit 110 V (only for connector N)

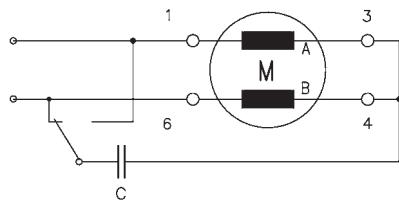

Parallel circuit 230 V (only for connector N)
with 110 V motor and capacitor C_V

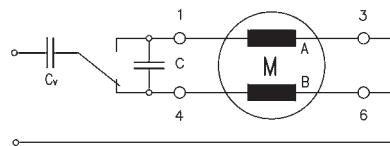

$C_V = 0,33 \mu\text{F}, 250 \text{ VAC}$


switch to

1 Pull (in)

4 Push (out)

6 Push (out)
(for series circuit)

Dimensions Version with Connector D, with 13 mm travel

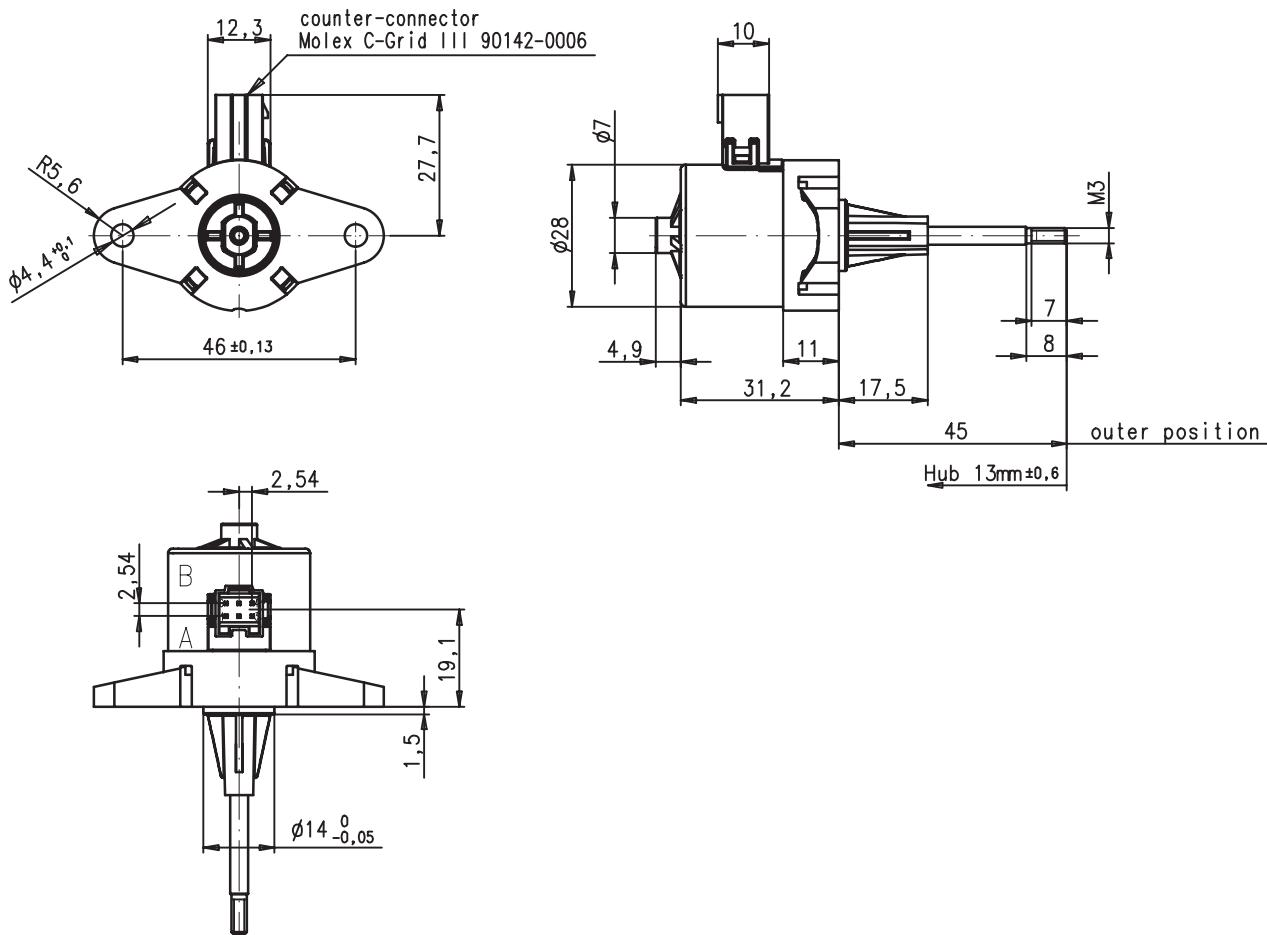

UBK1

Dimensions (mm)	$\varnothing 36 \times 36$
Travel (mm)	8/13/56 ± 0,7
Voltage (V)	12–230
Thread pitch (mm)	1,0
Speed (mm/s)	
50 Hz	6,67/8,33
60 Hz	8/10
Pole number	12
Max. Force (N)*	35
Lifetime	on request



*Depends on winding, frequency and lifetime required.

Drive against end stops only permissible after clarification of operating conditions and approval by Saia-Burgess.

Radial forces on the shaft will reduce life time and performance.

Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15...+60
Ambient temperature storage	°C -20...+100
Thermal resistance at f=0 R _{therm}	27 K/W
Thermal class	A according to DIN EN 60085
Approval	Standard
Mounting	any position
Electrical connection	jack connector
Protection	IP 40 according to DIN EN 60529
Weight	90 g
Rotor stalling	motor can be stopped when voltage is applied without being overheated, with controlled duty cycle
Bearings	ball bearing, for live time lubricated
Electric strength	according to DIN EN 60034-1/DIN EN 60335-1


Order Reference

Type	Synchronous Motor	UBK1	N	12V/50Hz	B	3C
Approval	N Approval Standard					
Voltage/Frequency	See next page					
Connector	6 pole connector (other on request)					
Shaft	3C Travel 8 mm ± 0,7 mm (other on request)					

Technical Data

Rated frequency	Hz	50	60
Axial speed	mm/sec	8,33	10
Tolerance of voltage	standard power supply system + 10% / - 10%		
Linear travel max.	mm	8; 13; 56 ± 0,7	
Axial play at ± 20 N force	mm	< 0,25	
Duty cycle		100%	
Winding temperature T _{max}	°C	105°C	
Capacitors	Rated voltage U _N	V	24 48
	Operation capacitor C ₅₀	µF/VAC	3,9/40 1,0/70
	Operation capacitor C ₆₀	µF/VAC	3,9/40 1,0/70

Dimensions

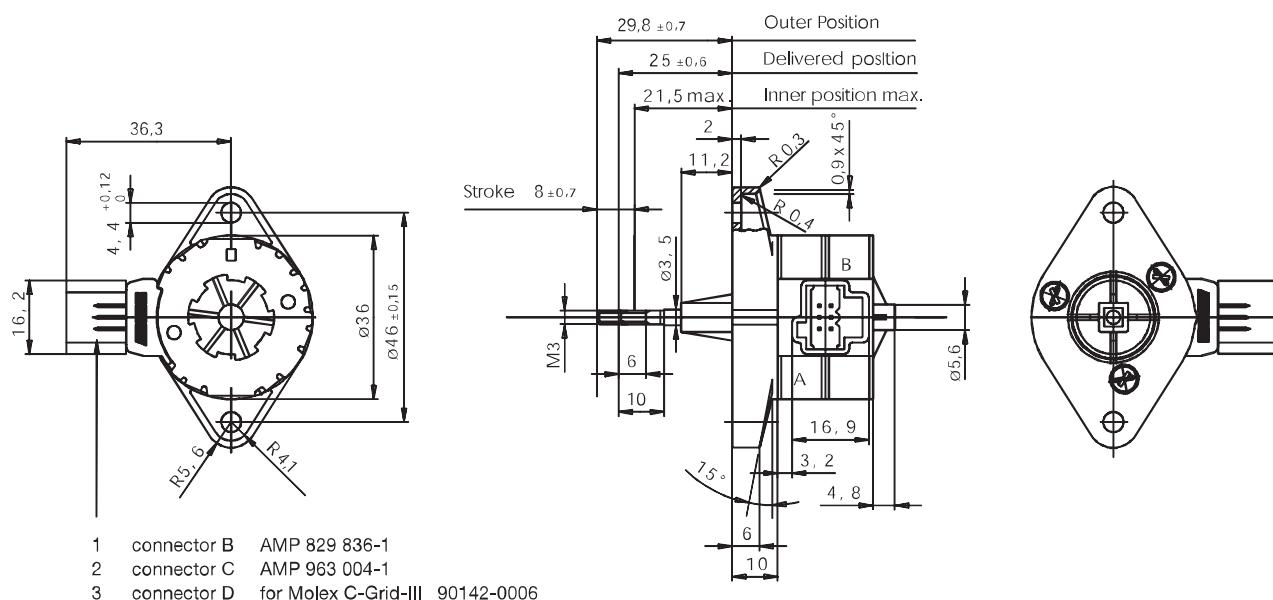

UO Linear actuator (LA5021SM)

Dimensions (mm)	$\varnothing 50 \times 76$
Travel (mm)	45–50
Voltage (V)	12–230
Thread pitch (mm)	1,5/1,5/1,5
Speed (mm/s)	
50 Hz	6,25/9,37/12,5
60 Hz	7,5/11,25/15
Pole number	24/16/12
Max. Force (N)*	45–50



* Depends on winding, frequency and lifetime required.

Drive against end stops only permissible after clarification of operating conditions and approval by Saia-Burgess.

Radial forces on the shaft will reduce life time and performance.

Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15 ... +40
Ambient temperature storage	°C -20 ... +100
Thermal class	A according to DIN EN 60085
Winding coil temperature increase	K 85
Approval	standard
Mounting	any position
Electrical connection	cable
Protection	IP 40 according to DIN EN 60529
Weight	~ 220 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	ball bearing


Order Reference

Type	Synchronous Motor	LA 5021 SM	24 V	6,25 mm/s	45 mm
Nominal Voltage	24 V 50/60 Hz 110 V 50/60 Hz 230 V 50/60 Hz				
Operating speed	6,25 mm/s at 50 Hz 9,375 mm/s 12,5 mm/s				
Travel	50 mm				


Technical Data

Speed 50 Hz	mm/s	6,25	9,375	12,5
60 Hz	mm/s	7,5	11,25	15
Push/Pull force	N	5050	45	
Linear travel	mm	50		
Axial play	mm	$\pm 0,1$		
Static axial force	N	max. 100		
self-locking by spindle/nut system		yes		
Drive		not stall-proof		
Anti-rotation guidance of spindle		built in		
Capacitors	at UN: 24 V	$\mu\text{F}/\text{V}\sim$	15/63	
	at UN: 110 V	$\mu\text{F}/\text{V}\sim$	0,75/250	
	at UN: 230 V	$\mu\text{F}/\text{V}\sim$	0,18/500	


Circuit diagram Parallel circuit

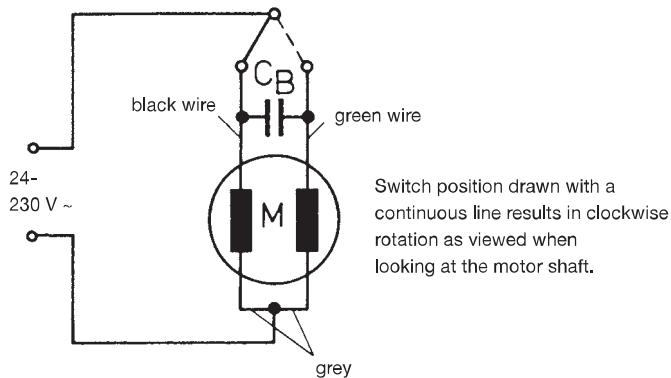

Dimensions

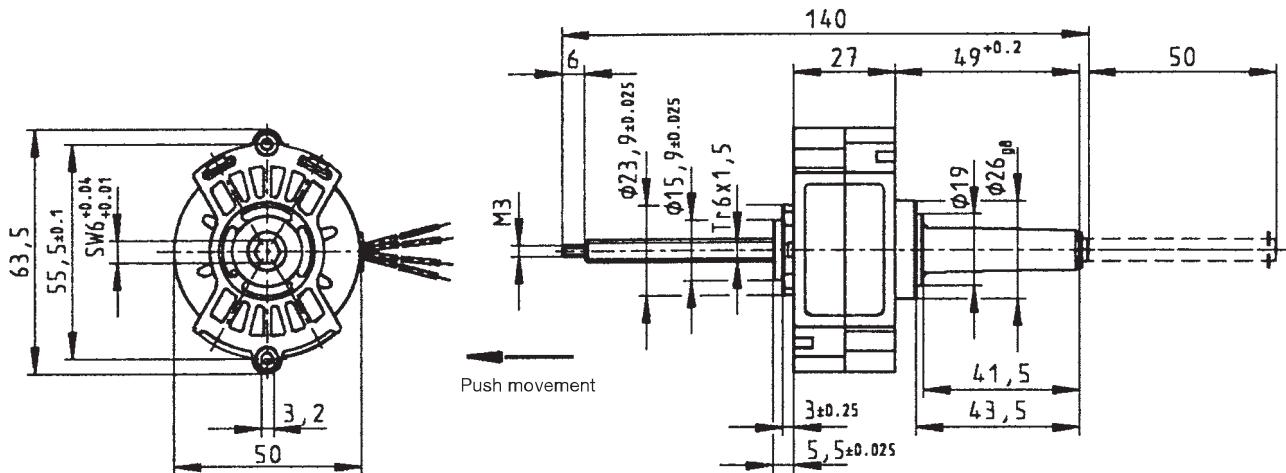

Standard - wire length: $100^{+20} \text{ mm}/6^{\pm 1}$ stripped

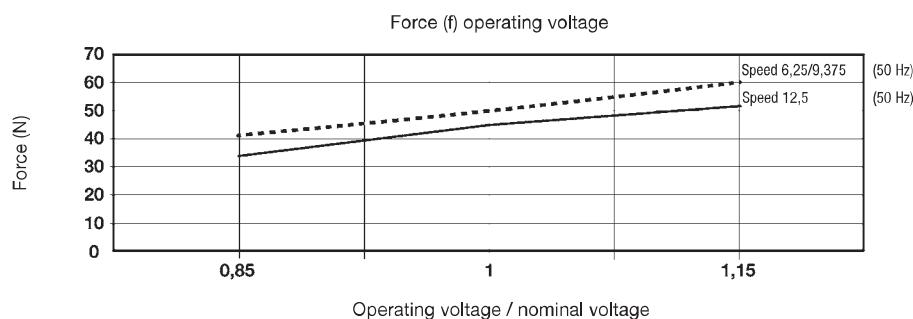Chart: Force versus voltage

UO Spindle actuator (SP5021SM; SP5022SM)

Dimensions (mm)	$\varnothing 50 \times 27$
Travel (mm)	68–130
Voltage (V)	12–230
Thread pitch (mm)	1,5/1,5/1,5
Speed (mm/s)	
50 Hz	6,25/9,375/12,5
60 Hz	7,5/11,25/15
Pole number	24/16/12
Max. Force (N)*	45–50 (SP5021SM); 50–70 (SP5022SM)



* Depends on winding, frequency and lifetime required.

Drive against end stops only permissible after clarification of operating conditions and approval by Saia-Burgess.

Radial forces on the shaft will reduce life time and performance.

Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15 ... +40
Ambient temperature storage	°C -20 ... +100
Thermal class	A according to DIN EN 60085
Winding coil temperature increase	K 85
Approval	standard
Mounting	any position
Electrical connection	cable
Protection	IP 40 according to DIN EN 60529
Weight	~ 220 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	ball bearing


Order Reference

Type	Synchronous Motor	SP5021SM / SP5022SM	24 V	6,25 mm/s	68 mm
Nominal Voltage	24 V 50/60 Hz 110 V 50/60 Hz 230 V 50/60 Hz				
Speed at 50 Hz	6,25 mm/s 9,375 mm/s 12,5 mm/s				
Travel	68 mm 130 mm				


Technical Data

SP5021SM	Speed 50 Hz	mm/s	6,25	9,375	12,5
	60 Hz	mm/s	7,5	11,25	15
	Push/Pull force	N	50	50	45
	Linear travel	mm	~68/ ~130		
	Axial play	mm	± 0,1		
	Static axial force	N	max. 100		
	self-locking by spindle/nut system		yes		
	Drive		not stall-proof		
	Anti-rotation guidance of spindle		external required		
Capacitors	at U_N : 24 V	$\mu\text{F}/\text{V}\sim$	15/63		
	at U_N : 110 V	$\mu\text{F}/\text{V}\sim$	0,75/250		
	at U_N : 230 V	$\mu\text{F}/\text{V}\sim$	0,18/500		
SP5022SM	Speed 50 Hz	mm/s	6,25	9,375	12,5
	60 Hz	mm/s	7,5	11,25	15
	Push/Pull force	N	70	70	50
	Linear travel	mm	~68/ ~130		
	Axial play	mm	± 0,1		
	Static axial force	N	max. 100		
	self-locking by spindle/nut system		yes		
	Drive		not stall-proof		
	Anti-rotation guidance of spindle		external required		
Capacitors	at U_N : 24 V	$\mu\text{F}/\text{V}\sim$	15/63		
	at U_N : 110 V	$\mu\text{F}/\text{V}\sim$	0,75/250		
	at U_N : 230 V	$\mu\text{F}/\text{V}\sim$	0,18/500		

Circuit diagram Parallel circuit


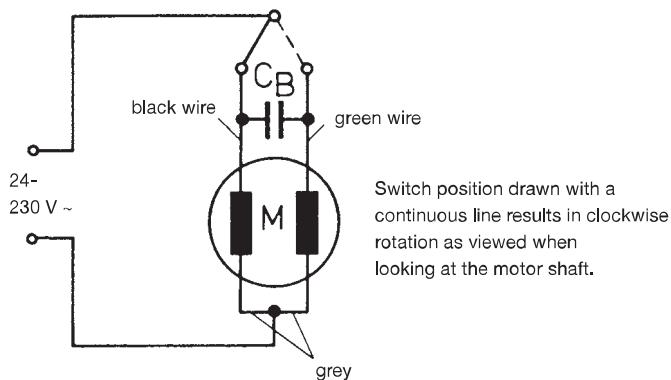


Dimensions Version with Travel 68 mm
130 mm

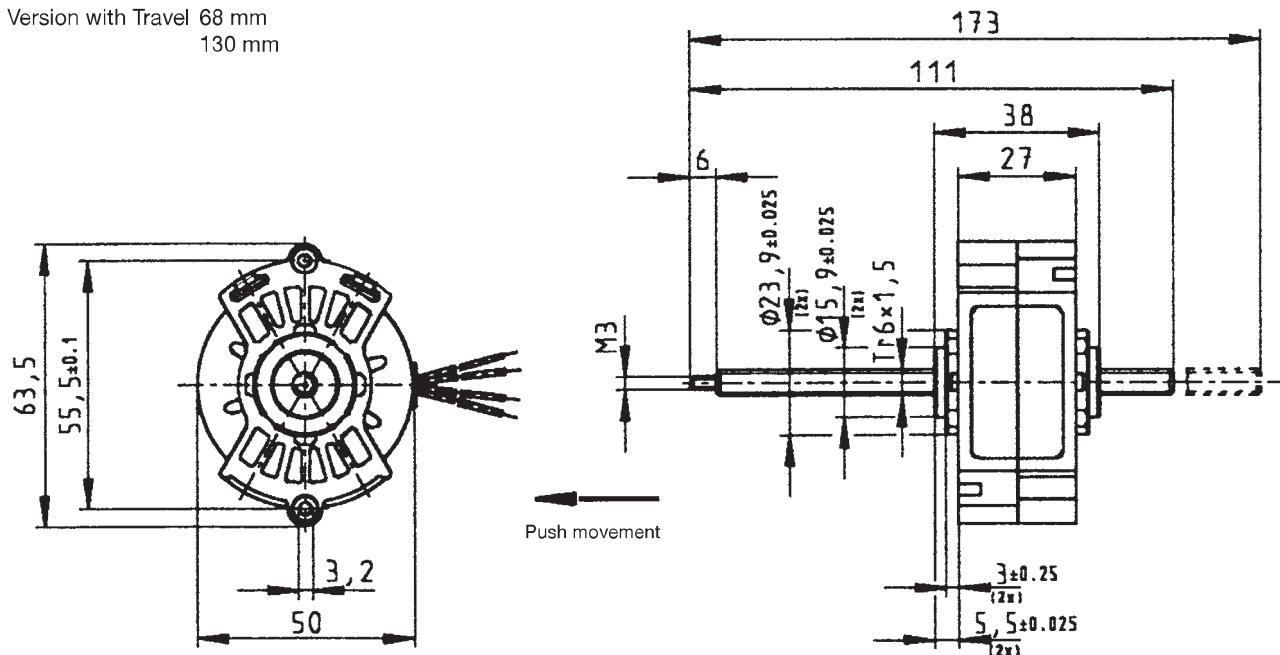


Standard - wire length: $100^{+20} \text{ mm}/6^{\pm 1}$ stripped

Chart: Force versus voltage

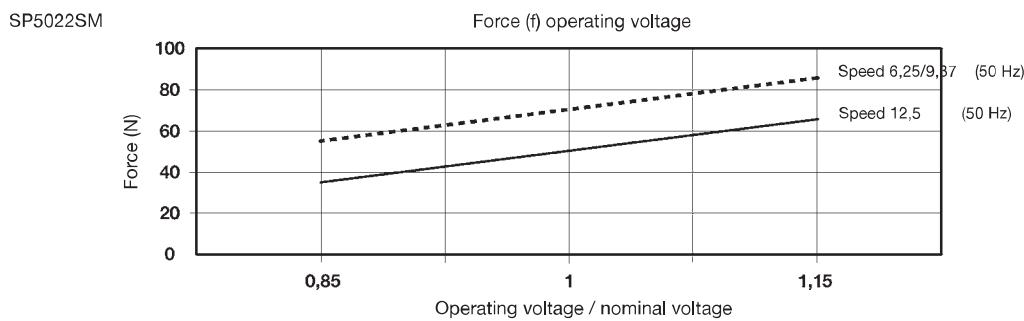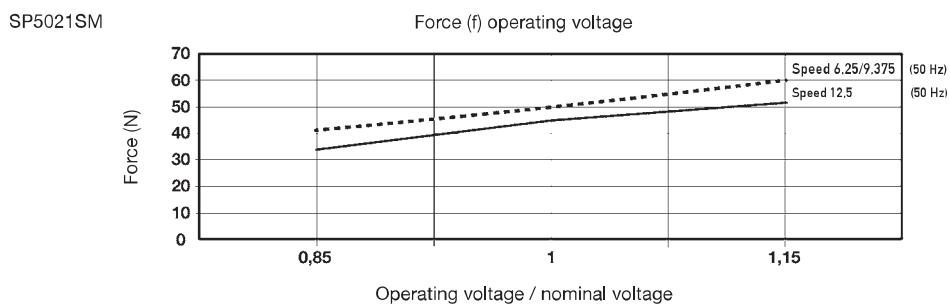

Stepper Motors

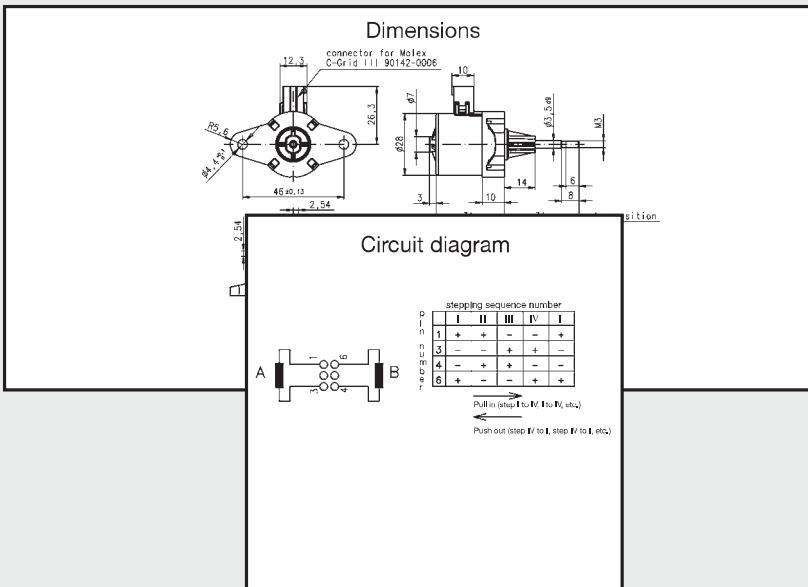

UCE1/7; UCE2/8

Dimensions (mm)	\varnothing 28 x 31
Travel (mm)	10/13
Travel per step (mm)	0,021
Thread pitch (mm)	1,0
Speed (mm/s) at 200 Hz	4,16
Step angle (°)	7,5
Max. Force (N)*	35



*Depends on winding, frequency and lifetime required.

Drive against end stops only permissible after clarification of operating conditions and approval by Saia-Burgess.

Radial forces on the shaft will reduce life time and performance.

Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15 ... +60
Ambient temperature storage	°C -20 ... +100
Thermal resistance at f=0 R _{therm}	29 K/W
Thermal class	B according to DIN EN 60085
Approval	standard
Mounting	any position
Electrical connection	connector type C, D
Protection	IP 40 according to DIN EN 60529
Weight	67 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	ball bearing

Order Reference



Type	Stepper Motor	UCE	13	N	24 Ω	B	1A
Configuration	13 bipolar, standard magnet 23 unipolar, standard magnet	73 83	bipolar, stronger magnet unipolar, stronger magnet				
Approval	N						
Resistance	see next page, Resistance per winding for bipolar or unipolar						
Connection	C see pages 174, „Connection Types“ D						
Shaft	1B Travel 13 mm ± 0,7 mm (others on request)						

Technical Data



bipolar	type		UCE1	UCE1	UCE7	UCE7
	Operating frequency	Hz	100	200	100	200
	max. Push/Pull force *	N	49	42	50	50
	30% duty cycle	N	42	28	49	39
	100% duty cycle	N				
unipolar	type		UCE2	UCE2	UCE8	UCE8
	Operating frequency	Hz	100	200	100	200
	max. Push/Pull force *	N	35	28	49	39
	30% duty cycle	N	21	17	29	23
	100% duty cycle	N				
	Rated voltage U_N :	V	6	12	24	
	Resistance per winding R_{20}	Ω	24	90	380	
	Steps per mm		48			
	Duty cycle		100 %			
	Winding temperature T_{\max}	$^{\circ}\text{C}$	130			
	Linear travel max.	mm	10/13			
	Axial play at ± 20 N force	mm	< 0,25			

* measured at 23 °C, lifetime depends on load characteristics and ambient conditions


Circuit diagram bipolar

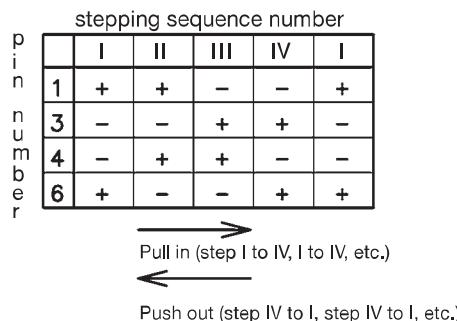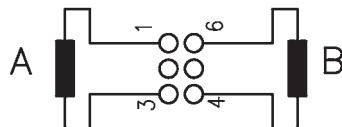

unipolar

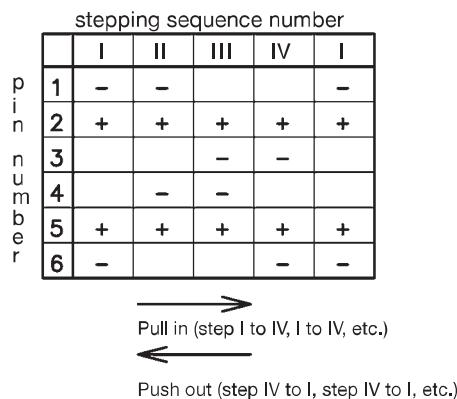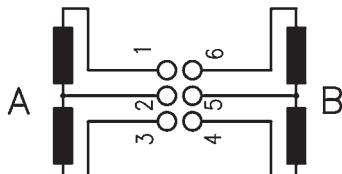

Dimensions Version with connector D, 13 mm travel

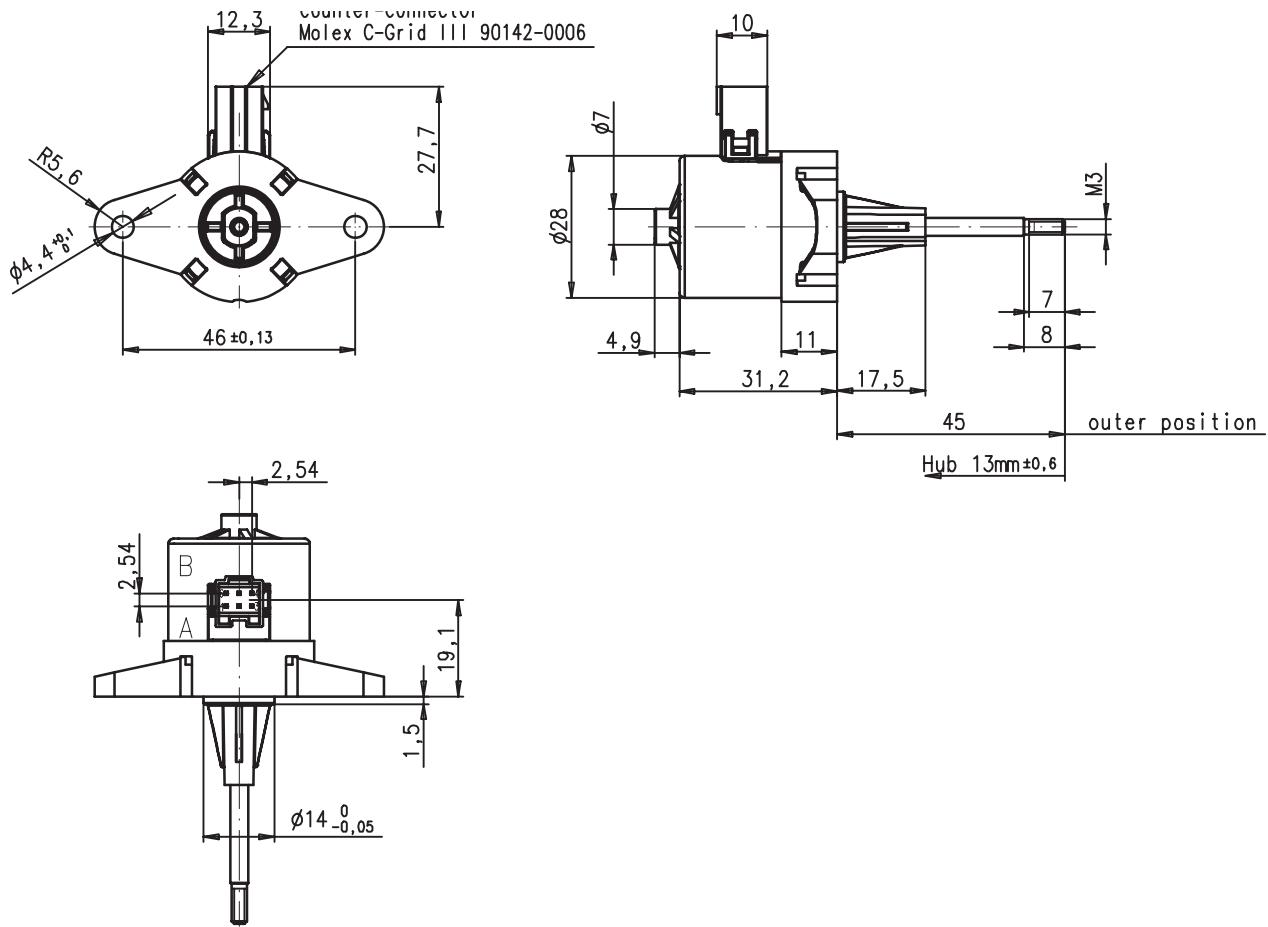

UCL1/7; UCL2/8

Dimensions (mm)	$\varnothing 28 \times 31$
Travel (mm)	10/13
Travel per step (mm)	0,041
Thread pitch (mm)	1,0
Speed (mm/s) at 200 Hz	8,33
Step angle (°)	15
Max. Force (N)*	35



*Depends on winding, frequency and lifetime required.

Drive against end stops only permissible after clarification of operating conditions and approval by Saia-Burgess.
Radial forces on the shaft will reduce life time and performance.



Linear

Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15 ... +60
Ambient temperature storage	°C -20 ... +100
Thermal resistance at f=0 R _{therm}	29 K/W
Thermal class	B according to DIN EN 60085
Approval	standard
Mounting	any position
Electrical connection	connector type C, D
Protection	IP 40 according to DIN EN 60529
Weight	67 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	ball bearing

Order Reference


Type	Stepper Motor	UCL	13	N	24 Ω	B	1A
Configuration	13 bipolar, standard magnet 23 unipolar, standard magnet	73 83	bipolar, stronger magnet unipolar, stronger magnet				
Approval	N						
Resistance	see next page, Resistance per winding for bipolar or unipolar						
Connection	C see pages 174, „Connection Types“ D						
Shaft	1B Travel 13 mm ± 0,7 mm (others on request)						

Technical Data

bipolar	type			UCL1	UCL1	UCL7	UCL7
	Operating frequency	Hz		100	200	100	200
	max. Push/Pull force *	30% ED	N	35	30	50	45
		100% ED	N	30	20	35	28
unipolar	type			UCL2	UCL2	UCL8	UCL8
	Operating frequency	Hz		100	200	100	200
	max. Push/Pull force *	30% ED	N	25	20	35	28
		100% ED	N	15	12	21	17
	Rated voltage U_N :	V		6	12	24	
	Resistance per winding R_{20}	Ω		24	90	380	
	Steps per mm			24			
	Duty cycle			100 %			
	Winding temperature T_{\max}	$^{\circ}\text{C}$		130			
	Linear travel max.	mm		10/13			
	Axial play at ± 20 N force	mm		< 0,25			

* measured at 23 °C, lifetime depends on load characteristics and ambient conditions


Circuit diagram bipolar

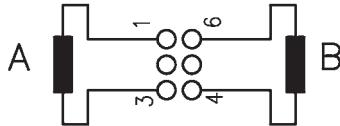

stepping sequence number					
p in n u m b e r	I	II	III	IV	I
1	+	+	-	-	+
3	-	-	+	+	-
4	-	+	+	-	-
6	+	-	-	+	+

→ Pull in (step I to IV, I to IV, etc.)
← Push out (step IV to I, step IV to I, etc.)


unipolar

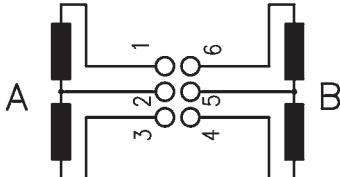

stepping sequence number					
p in n u m b e r	I	II	III	IV	I
1	-	-			-
2	+	+	+	+	+
3			-	-	
4		-	-		
5	+	+	+	+	+
6	-			-	-

→ Pull in (step I to IV, I to IV, etc.)
← Push out (step IV to I, step IV to I, etc.)

Dimensions Version with connector D, 13 mm travel

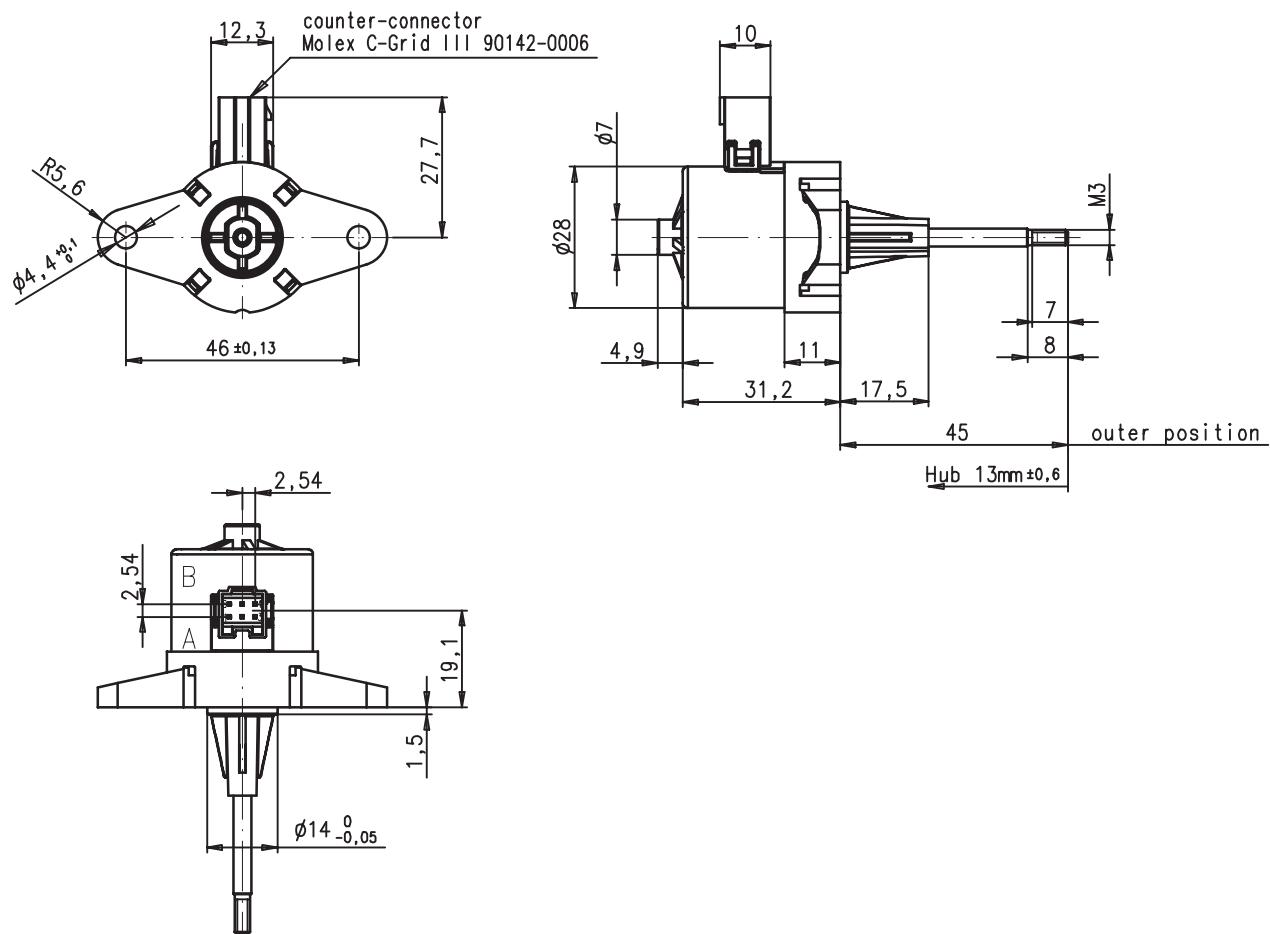

UBL1/2

Dimensions (mm)	$\varnothing 36 \times 36$
Travel (mm)	8; 13; 56 ± 0,7
Travel per step (mm)	0,041
Thread pitch (mm)	0,8
Speed (mm/s) at 200 Hz	8,33
Step angle (°)	15
Max. Force (N)*	35 (for special winding, lower lifetime)
Lifetime	on request



*Depends on winding, frequency and lifetime required.

Drive against end stops only permissible after clarification of operating conditions and approval by Saia-Burgess.

Radial forces on the shaft will reduce life time and performance.

Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	°C -15...+60
Ambient temperature storage	°C -20...+100
Thermal resistance at f=0 R _{therm}	27 K/W
Thermal class	A according to DIN EN 60085
Approval	standard
Mounting	any position
Electrical connection	jack connector
Protection	IP 40 according to DIN EN 60529
Weight	90 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	ball bearing, for live lubricated
Electric strength	according to DIN EN 60034-1/DIN EN 60335-1


Order Reference

Type	Stepper Motor	UBL	13	N	100	B	3C
Configuration	13 bipolar 23 unipolar						
Approval	N Approval Standard						
Resistance	See next page Resistance per winding for bipolar or unipolar.						
Connection	Jack connector 6 pin (other on request)						
Shaft	3C Travel 8 mm ± 0,7 mm / Tr. 3,7 x 1 (other on request)						



Technical Data

bipolar (UBL1)	Rated voltage U _N	V	6	12	24
	Resistance per winding R ₂₀	Ω	18,5	100	460
unipolar (UBL2)	Rated voltage U _N	V	6	12	24
	Resistance per winding R ₂₀	Ω	28	120	500
Steps per revolution		24			
Steps per mm		30/24			
Winding temperature T _{max}		105° C			
Duty cycle		100%			
Linear travel max.		8; 13; 56 ± 0,7			
Axial play at ± 20 N force		< 0,25 mm			
Axial force at 200 Hz F _A		10 N			

Dimensions

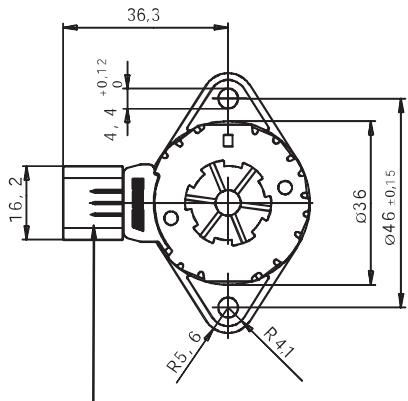

- 1 connector B AMP 829 836-1
- 2 connector C AMP 963 004-1
- 3 connector D for Molex C-Grid-III 90142-0006

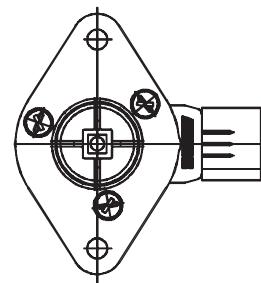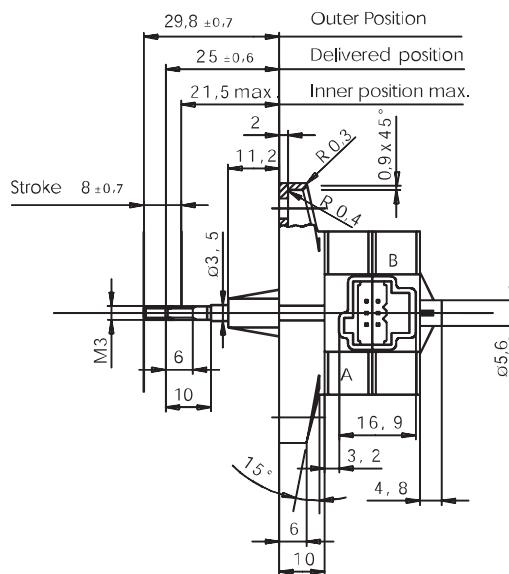

Linear

UO Linear actuator (LA5021ST)

Dimensions (mm)	$\varnothing 50 \times 76$
Travel (mm)	45–50
Travel per step (mm)	0,031/0,047/0,063
Thread pitch (mm)	1,5/1,5/1,5
Speed (mm/s) at 200 Hz	6,25/9,37/12,5
Step angle ($^{\circ}$)	7,5/11,25/15
Max. Force (N)*	45–50



*Depends on winding, frequency and lifetime required.

Drive against end stops only permissible after clarification of operating conditions and approval by Saia-Burgess.

Radial forces on the shaft will reduce life time and performance.

Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	$^{\circ}\text{C} -15 \dots +40$
Ambient temperature storage	$^{\circ}\text{C} -20 \dots +105$
Thermal resistance at $f=0$ R_{therm}	K/W 20
Thermal class	A according to DIN EN 60085
Approval	standard
Mounting	any position
Electrical connection	cable
Protection	IP 40 according to DIN EN 60529
Weight	~220 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	ball bearing
Electric strength	According to DIN EN 60034-1/DIN EN 60335-1


Order Reference

Type	Stepper Motor	LA5021ST	7 Ω	0,031 mm	50 mm
Resistance	7 Ω				
Travel per step	0,031 mm 0,047 mm 0,063 mm				
Travel	50 mm				

Technical Data

bipolar	Rated voltage U_N :	V	4 (Chopper drive)		
	Resistance per winding R_{20}	Ω	7		
	Step angle	$^\circ$	7,5	11,25	15
	Travel per step	mm	0,031	0,047	0,063
	Steps per mm		32	21	16
	Winding temperature T_{max}	$^\circ C$	130		
	Duty cycle		100%		
	Linear travel max.	mm	50		
	Axial play at 20 N force	mm	<0,25		

Dimensions

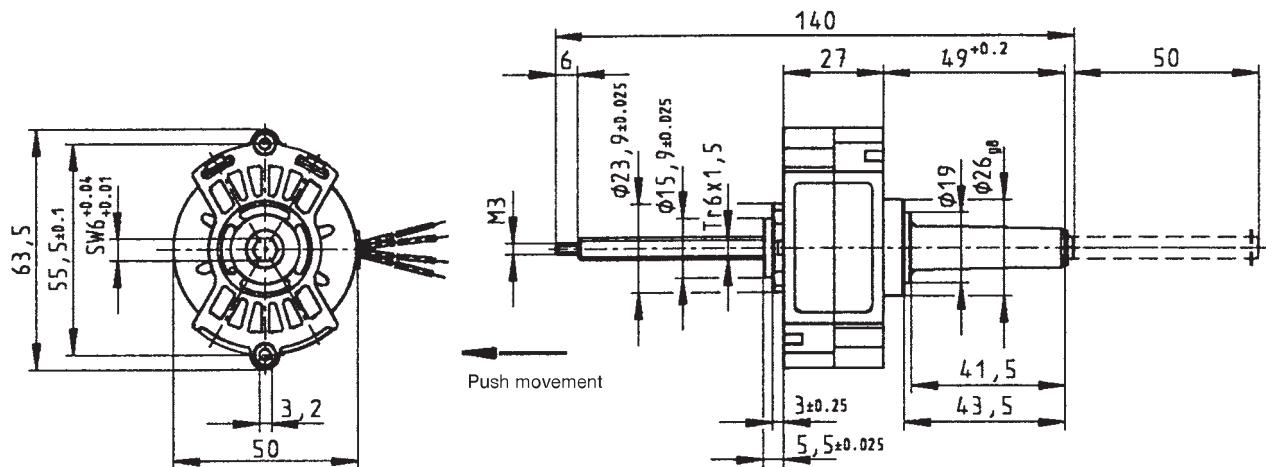Standard - wire length: $100^{+20} \text{ mm}/6^{\pm 1} \text{ stripped}$

UO Spindle actuator (SP5022ST)

Dimensions (mm)	$\varnothing 50 \times 27$
Travel (mm)	68–130
Travel per step (mm)	0,031/0,047/0,063
Thread pitch (mm)	1,5/1,5/1,5
Speed (mm/s) at 200 Hz	6,25/9,37/12,5
Step angle ($^{\circ}$)	7,5/11,25/15
Max. Force (N)*	50–70



*Depends on winding, frequency and lifetime required.

Drive against end stops only permissible after clarification of operating conditions and approval by Saia-Burgess.

Radial forces on the shaft will reduce life time and performance.

Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1
Ambient temperature operation	$^{\circ}\text{C}$ -15 ... +40
Ambient temperature storage	$^{\circ}\text{C}$ -20 ... +105
Thermal resistance at $f=0$ R_{therm}	K/W 20
Thermal class	A according to DIN EN 60085
Approval	standard
Mounting	any position
Electrical connection	cable
Protection	IP 40 according to DIN EN 60529
Weight	~220 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	ball bearing
Electric strength	According to DIN EN 60034-1/DIN EN 60335-1


Order Reference

Type	Stepper Motor	SP5022ST	7 Ω	0,031 mm	68 mm
Resistance	7 Ω				
Travel per step	0,031 mm 0,047 mm 0,063 mm				
Travel	68 mm 130 mm				

Technical Data

bipolar	Rated voltage U_N :	V	4 (Chopper drive)		
	Resistance per winding R_{20}	Ω	7		
	Step angle	$^\circ$	7,5	11,25	15
	Travel per step	mm	0,031	0,047	0,063
	Steps per mm		32	21	16
	Winding temperature T_{max}	$^{\circ}C$	130		
	Travel	mm	~68/+130		
	Positioning accuracy (incl. axial play)	mm	$\pm 0,15$		
	Static axial force	N	max. 50		
	Self-locking by spindle/nut system		yes		
	Drive		not stall-proof		
	Anti-rotation guidance of spindle		external required		

Dimensions Version with Travel 68 mm
130 mm

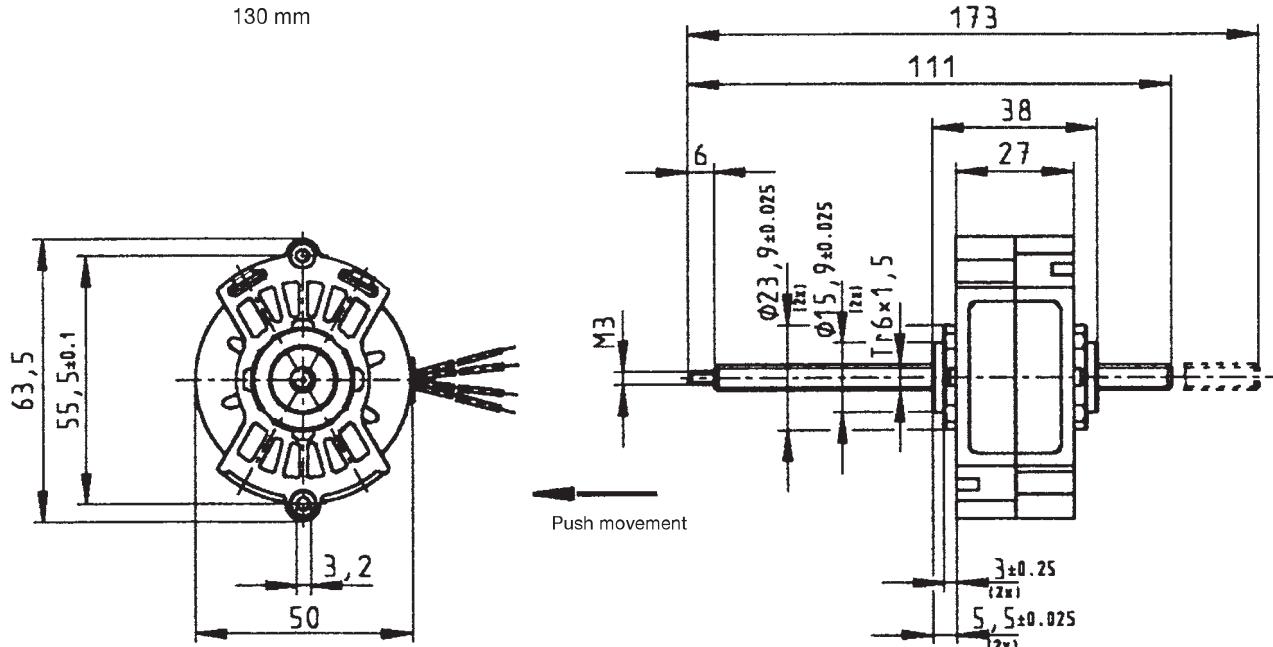


Standard - wire length: 100⁺²⁰ mm/6^{±1} stripped


Linear

Connection Types UC motors

Lead wire Connection N

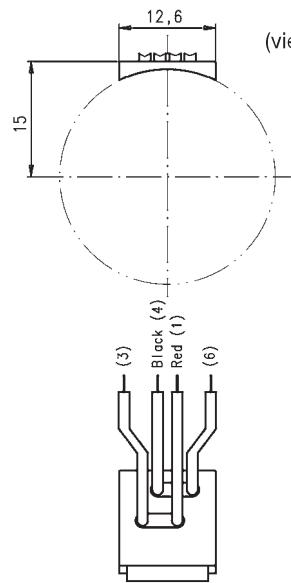

(view to drive side)

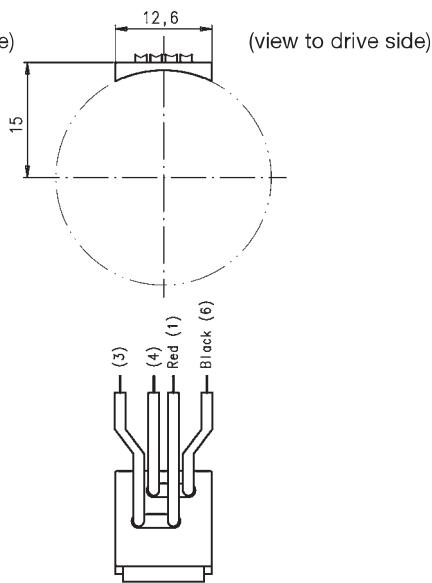

(view to drive side)


up to 48 V
for rotary motors
(bipolar, synchronous in parallel circuit)

different lead colours for 110 V (230 V)
for rotary synchronous motors in series circuit


Linear

Connector Connector C

for Tyco Modu IV 0-1740209-6

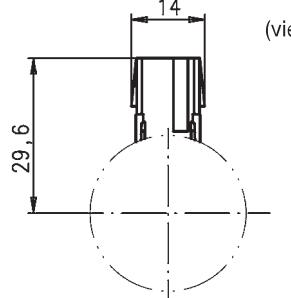


(view to drive side)

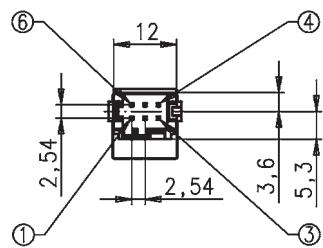


up to 48 V
for linear motors
(bipolar, unipolar, synchronous)

Connector D

for Molex C-Grid III 90142-006

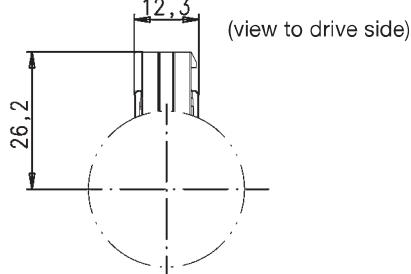


(view to drive side)

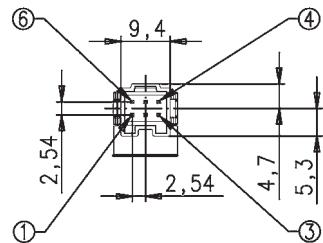

up to 48 V
for rotary and linear motors
(bipolar, unipolar, synchronous)

Electronics for Stepper Motors

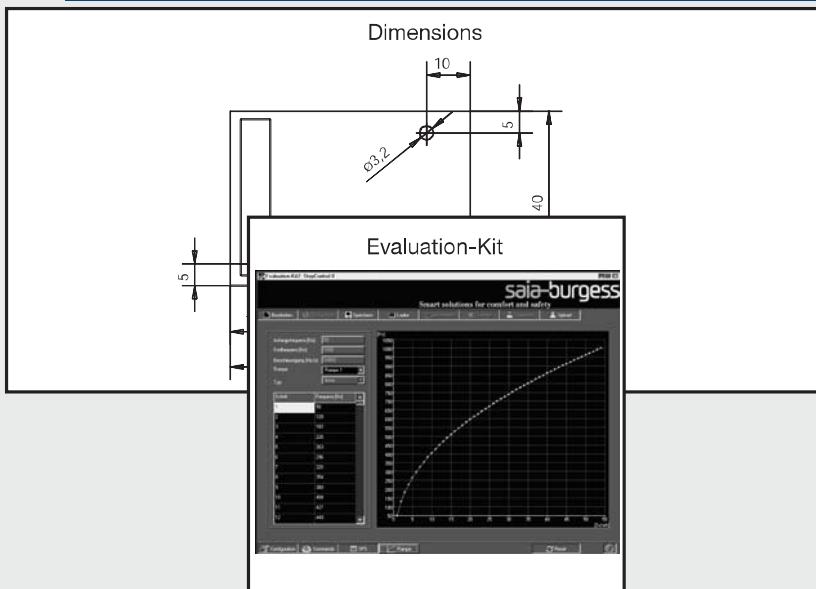

 JOHNSON
ELECTRIC

... innovating motion ...

www.contact-evolution.com

SAMOTRONIC101

Driver	for unipolar motors
Dimensions (mm)	55 x 40
Supply voltage (VDC)	10-24
Motor current	constant voltage drive
Step mode	full/half step
Clock source	internal or external
Control inputs to	<ul style="list-style-type: none">■ inhibit internal clock■ inhibit motor current■ change direction of rotations
Configuration	via DIP-switch, potentiometer



Preferred Range

Ordering Reference


4 636 6608 0 If motors are also to be ordered please state: "with MTA-100 receptacles for use with SAMOTRONIC101".

4 636 6608 3 with screw terminal for motor connection, max 0,5 mm²

Technical Data

Supply voltage	10-24 VDC
Phase current	≤ 350 mA
Control signal level	LS-TTL (0-5V) for all control inputs
Internal clock	50-360 Hz
External clock	up to 2 kHz
Dimensions	55 x 40 mm
Operating temperature	-5 to +50 °C
Storage temperature	-20 to +70 °C

Dimensions

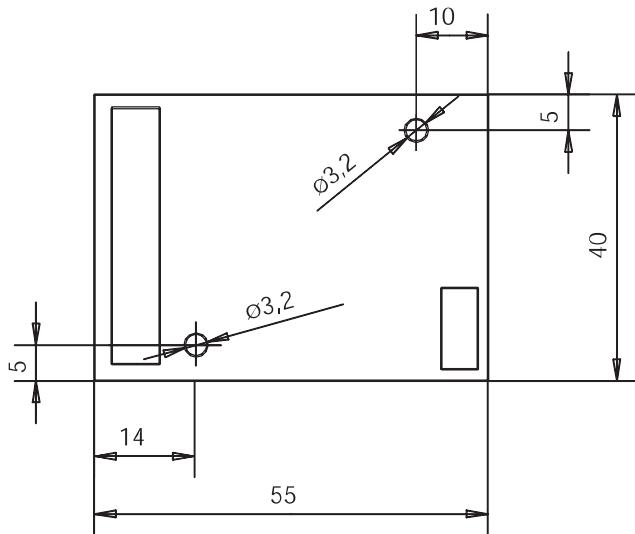

For latest technical and safety compliance information regarding these products, please download the relevant data sheet from our web site:
www.saia-burgess.com/drivers

Samotronic102

SAMOTRONIC102

Driver	for bipolar motors
Dimensions (mm)	84 x 54
Supply voltage (VDC)	<ul style="list-style-type: none">■ standard version 10 DC-24■ enhanced version 10 DC-42
Motor current	<ul style="list-style-type: none">■ constant current drive (chopper controlled)■ adjustable via potentiometer
Step mode	full/half step
Clock source	internal or external
Control inputs to	<ul style="list-style-type: none">■ inhibit internal clock■ inhibit motor current■ change direction of rotations
Configuration	via DIP-switch, potentiometer
Test pins	<ul style="list-style-type: none">■ motor current■ step frequency



Preferred Range

Ordering Reference

4 636 6733 0 10-24VDC supply voltage (standard version)


4 636 6733 3 10-42VDC supply voltage (enhanced version)

If motors are also to be ordered please state: "with MTA-100 receptacles for use with SAMOTRONIC102".

Technical Data

Supply voltage	10-24 (42)VDC
Phase current	71-500 mA, on request max. 735mA/ph
Chopper frequency	typ. 20kHz
Control signal level	LS-TTL (0-5V) for all control inputs
Internal clock	50-1325 Hz
External clock	up to 2 kHz
Dimensions	84 x 54 mm
Operating temperature	-20 to +60 °C
Storage temperature	-20 to +80 °C

Dimensions

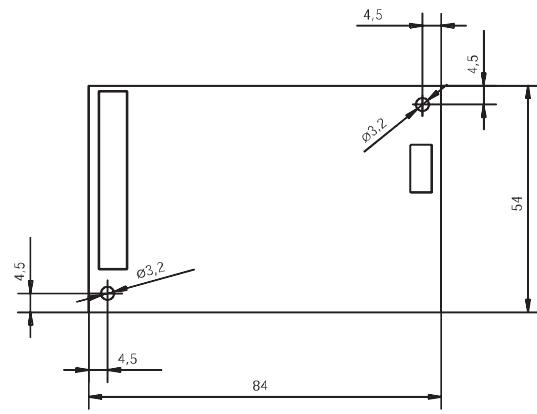

For latest technical and safety compliance information regarding these products, please download the relevant data sheet from our web site:
www.saia-burgess.com/drivers

Evaluation-Kit 2

Evaluation-Kit 2

Driver for unipolar and bipolar motors

Dimensions (mm) metal case 164 x 130 x 45



Supply voltage
(VDC) 3–48
(VAC) 24

Motor current constant voltage drive and
constant current drive (chopper controlled)

Step mode full/half/micro step

Clock source internal, programmable

Control inputs to
■ 3 digital inputs
■ 4 signal outputs
■ 1 analog input 0...10 VDC
■ relay contact

Configuration RS 232, USB

Order Reference


4 717 4898 0

Power supply (on request)

Technical Data



Supply voltage	10-48 VDC/24 VAC
Phase current	≤ up to 2,3 A
Step modes	11 (full, half, wave ... microstep)
Max. step frequency	10 kHz
PLC	max. 256 steps, 65536 loops
Operating temperature	0 ... +55 °C
Storage temperature	-20 to +80 °C

Test the Stepconfreeware without hardware in a
special demo mode
(www.saia-burgess.com/evaluationkit2).

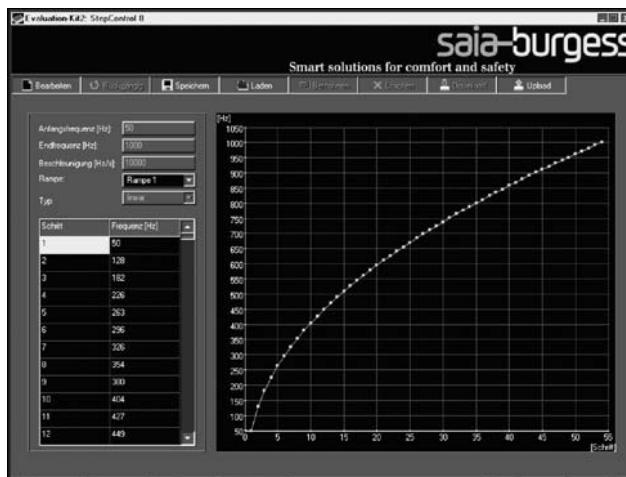

For further information please contact your
Saia-Burgess sales company
or see our website www.saia-burgess.com.

Cam Programmers

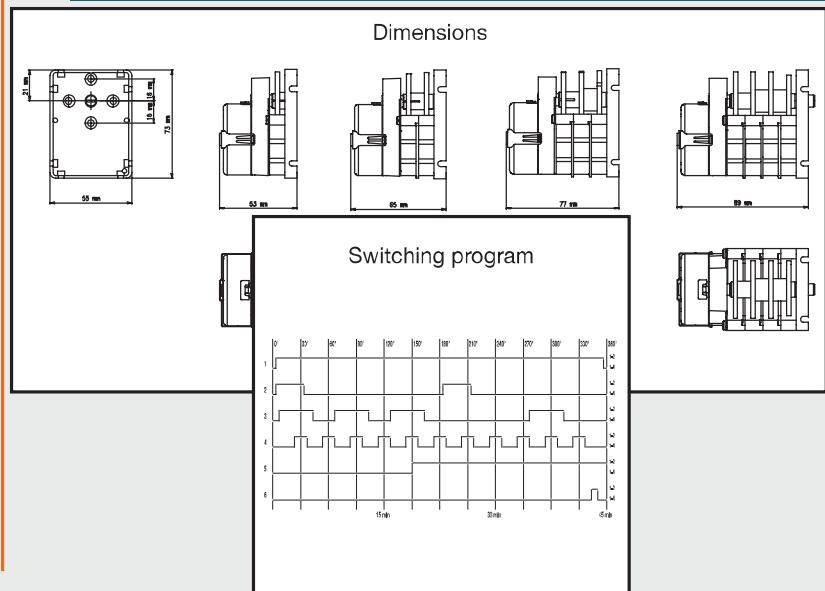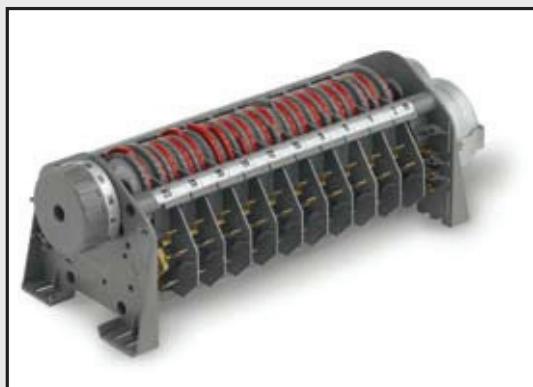

 JOHNSON
ELECTRIC

... innovating motion ...
www.contact-evolution.com

Synchronous programmer, 1 to 4 channels

Market

Healthcare & Medical Equipment, Personal Care, Building Automation & Security, White Goods, Home Appliances, Heating Ventilation & Air Conditioning, Industrial equipment & automation, Business Machines

Application

hand dryers, hair dryers, saunas, swimming pool, fountain variables, fog horn, bell towers, defrosting, ice cube machine, coffee machine, heating ventilation, sanibroyeurs, automation, galvano, test equipment, food specialities, botteling, newspaper, milk truck cleaning, milking equipment, drying, bookbinding, Vending machines, feeding systems







Characteristics

standard	optional	on request
Program milled cams, according customers diagram	with adjustable segment «S» cams or jumper «R» cams	
Nbre channels 1,2, 3 or 4 program channels		
Prog. duration from 1 sec to 120 h		
Driving unidirectional synchronous motor		
Voltage 230 V, 50 Hz or 110 V, 60 Hz		other voltages on request
Switching power 12 (6) A; UL 10 A		other switching power on request
Approvals standard EC	UL approval	

Order Reference

Type	Cam Programmer										KKP 00	3	01	B3	E1	N	00
Number of channels	1, 2, 3 or 4 channels																
Type of cams diagrams	01	with S cams															
	02	with R cams															
	03 to 99	customer specific diagram number															
Programm duration	B1	1 s	B2	10 s	D3	1.25 min	R3	6 min	K4	36 min							
	E1	1.5 s	C2	12 s	E3	1.5 min	S3	7.5 min	B5	1 h							
	J1	3 s	E2	15 s	F3	2 min	B4	10 min	E5	1.5 h	S5	7.5 h					
	M1	4 s	F2	20 s	J3	3 min	E4	15 min	F5	2 h	B6	10 h					
	Q1	5 s	J2	30 s	M3	4 min	W4	18 min	J5	3 h	C6	12 h					
	R1	6 s	B3	1 min	Q3	5 min	J4	30 min	R5	6 h	G6	24 h					
Supply voltage	B4	24 V 50 Hz	E1	230 V 50 Hz	J1	110 V 60 Hz											
Approval	N	standard EC				U	with UL-CSA approval										
	00	standard															
Execution	01 to 99	specific customer execution															
On request	other program duration				other voltage				other switching power								
Accessories	fixing bridle (for 3-point fixing)										4 109 4815 0						

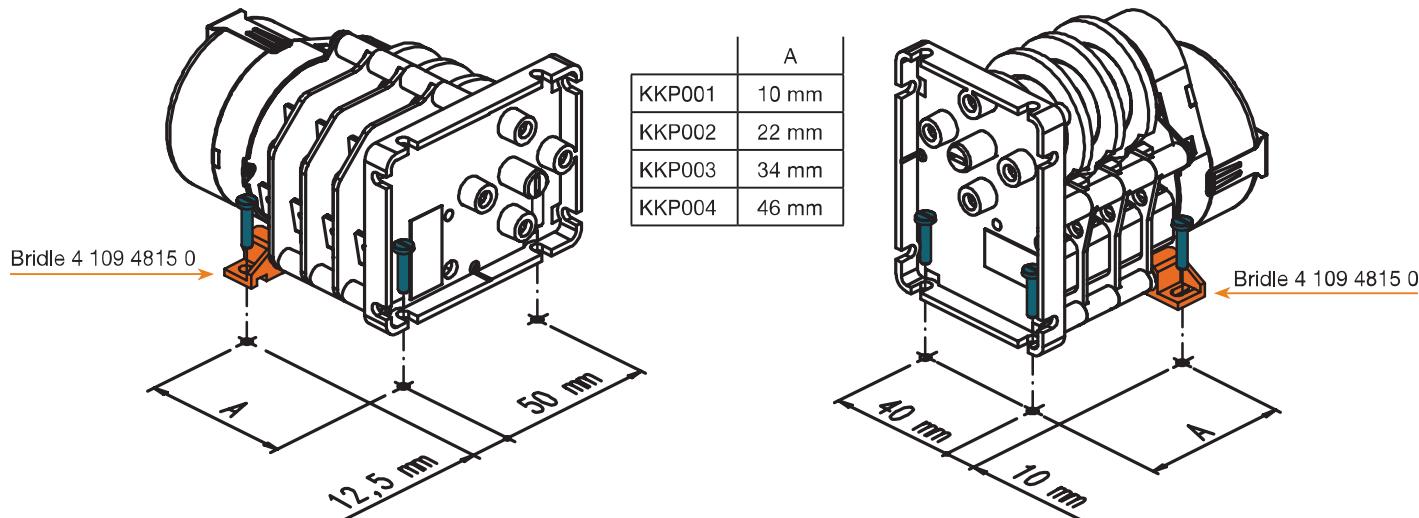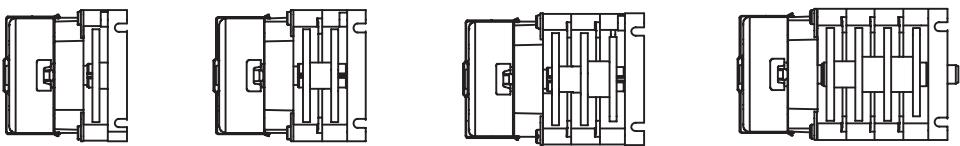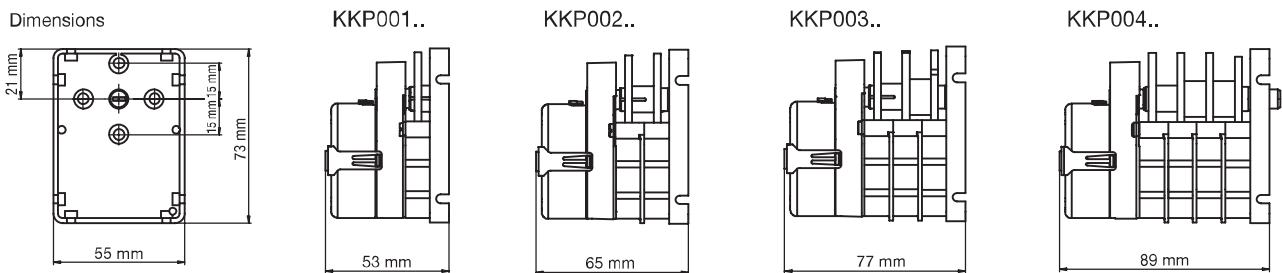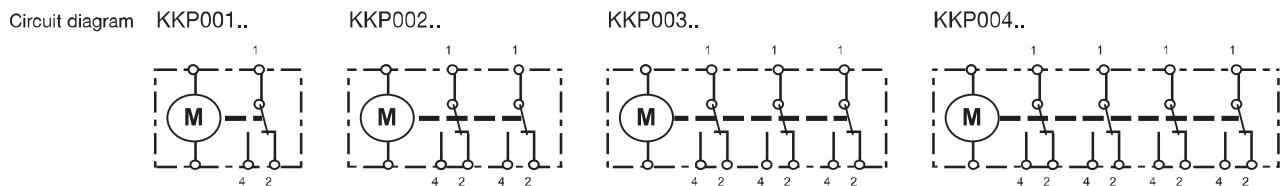

Synchronous programmer, 1 or 2 channels

Market

Healthcare & Medical Equipment, Personal Care, Building Automation & Security, White Goods, Home Appliances, Heating Ventilation & Air Conditioning, Industrial equipment & automation, Business Machines

Application

saunas, swimming pool, fountain variables, fog horn, bell towers, defrosting, heating ventilation, automation, galvano, test equipment, food specialities, botteling, newspaper, milk truck cleaning, milking equipment, drying, bookbinding, Vending machines, feeding systems



Characteristics


standard	optional	on request
Program milled cams, according customers diagram	with adjustable segment «S» cams or jumper «R» cams	
Nbre channels 1 or 2 program channels		
Prog. duration from 10 sec to 120 h		
Driving unidirectional synchronous motor		
Voltage 230 V, 50 Hz or 110 V, 60 Hz		other voltages on request
Switching power 12 (6) A; UL 10 A		other switching power on request
Approvals standard EC		

Order Reference


Type Cam Programmer	KKC 00	2	01	B2	E1	N	00
Number of channels 1 or 2 channels							
Type of cams 01 with S cams							
diagrams 02 with R cams							
03 to 99 customer specific diagram number							
Programm duration	B1 1 s	B2 10 s	D3 1.25 min	R3 6 min	K4 36 min		
	E1 1.5 s	C2 12 s	E3 1.5 min	S3 7.5 min	B5 1 h		
	J1 3 s	E2 15 s	F3 2 min	B4 10 min	E5 1.5 h	S5 7.5 h	
	M1 4 s	F2 20 s	J3 3 min	E4 15 min	F5 2 h	B6 10 h	
	Q1 5 s	J2 30 s	M3 4 min	W4 18 min	J5 3 h	C6 12 h	
	R1 6 s	B3 1 min	Q3 5 min	J4 30 min	R5 6 h	G6 24 h	
Supply voltage	B4 24 V 50 Hz	E1 230 V 50 Hz	J1 110 V 60 Hz				
Approval	N standard EC						
Execution	00 standard						
	01 to 99 specific customer execution						
On request	other program duration		other voltage		other switching power		
Accessories							

Circuit diagram







KKC001..



KKC002..



Dimensions

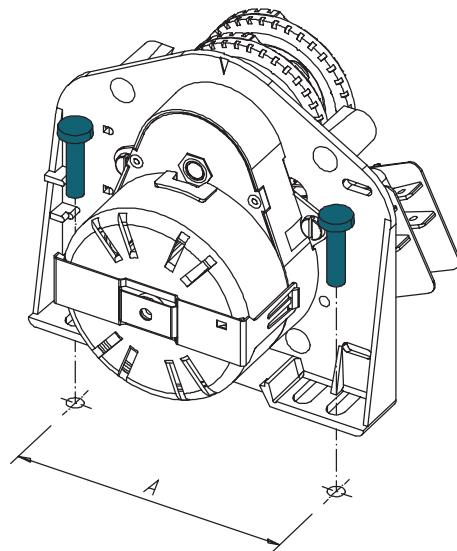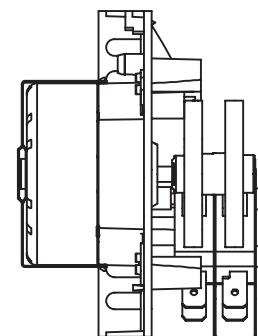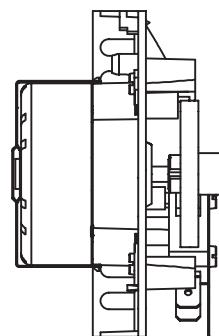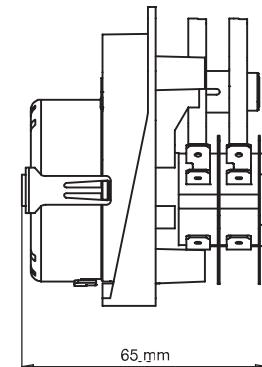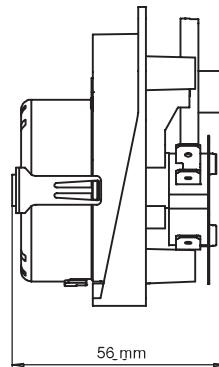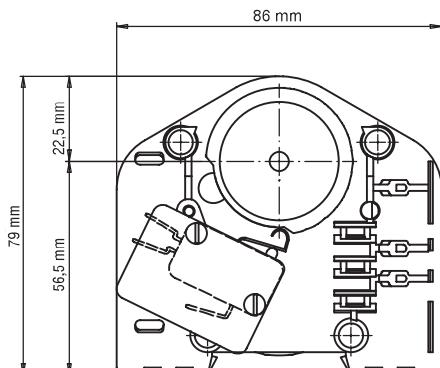

Synchronous programmers

Unlimited choice of program durations, with adjustable or defined programs.

Market

Healthcare & Medical Equipment, Personal Care, Building Automation & Security, White Goods, Home Appliances, Heating Ventilation & Air Conditioning, Industrial equipment & automation, Business Machines

Application

toilet cabins, swimming pool, fountain variables, fog horn, bell towers, defrosting, heating ventilation, sanibroyeurs, automation, galvano, test equipment, food specialities, bottling, newspaper, milk truck cleaning, carwash, milking equipment, bookbinding, Vending machines, feeding systems



Characteristics


	standard	optional	on request
Program	milled cams, according customers diagram	with adjustable segment «S» cams or jumper «R» cams	
Nbre channels	max. 30 Typ 4, 6, 8, 12, 20 program channels		
Prog. duration	from 10 sec to 120 h		
Driving	unidirectional synchronous motor		
Voltage	230 V, 50 Hz or 110 V, 60 Hz		other voltages on request
Switching power	12 (6) A; UL 10 A		other switching power on request
Approvals	standard EC	UL approval	

Order Reference




Type	Cam Programmer with unirotational synchronous motor										KKD0	2	A	01	J4	E1	N	00
Setting knob	0	without knob																
	2	with external knob																
Number of channels	1	2	3	4	5	6	7	8	9	10	11	12						
	1	2	3	4	5	6	7	8	9	A	B	C						
	13	14	15	16	18	20	22	24	25	26	28	30						
	D	E	F	G	J	M	P	R	S	T	V	W						
Type of cams diagrams	01	with S cams																
	02	with R cams																
	03 to 99	customer specific diagram number																
Programm duration	B1	1 s	B2	10 s	D3	1.25 min	R3	6 min	K4	36 min								
	E1	1.5 s	C2	12 s	E3	1.5 min	S3	7.5 min	B5	1 h	S5	7.5 h						
	J1	3 s	E2	15 s	F3	2 min	B4	10 min	E5	1.5 h	B6	10 h						
	M1	4 s	F2	20 s	J3	3 min	E4	15 min	F5	2 h	C6	12 h						
	Q1	5 s	J2	30 s	M3	4 min	W4	18 min	J5	3 h	G6	24 h						
	R1	6 s	B3	1 min	Q3	5 min	J4	30 min	R5	6 h								
Supply voltage	B4	24 V 50 Hz	E1	230 V 50 Hz	J1	110 V 60 Hz												
Approval	N	standard EC	U	with UL-CSA approval														
Execution	00	standard																
	01 to 99	specific customer execution																
On request	other program duration		other voltage		motor cw instead of ccw		higher electrical rating of microswitches											
Accessories	additional 6° snap-on riders for R-cams		4 264 4802 0		additional 12° snap-on riders for R-cams		4 264 4801 0											

KKD0


Circuit diagram

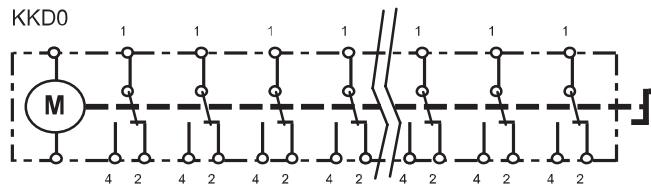

Dimensions

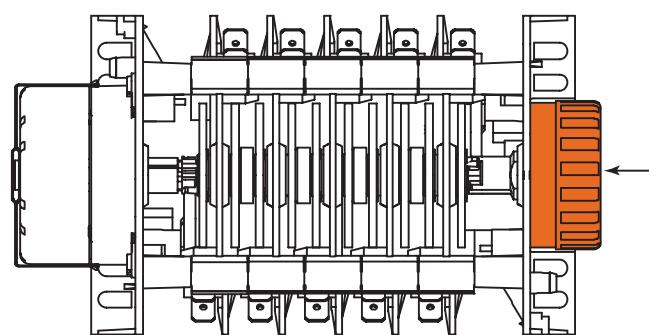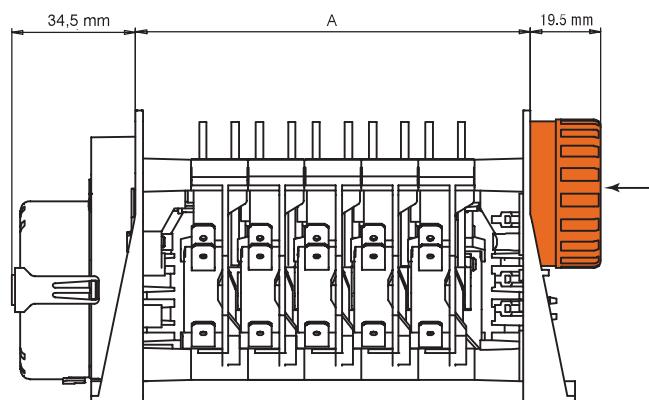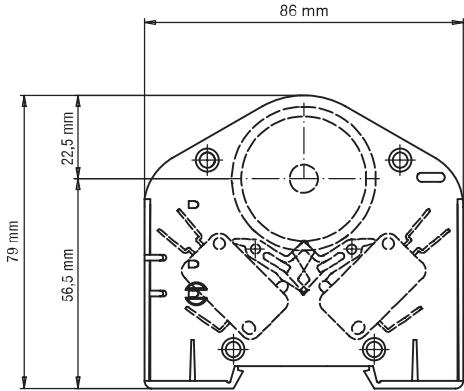

Number of program channels	Dimensions (mm)	
	A	B
1-2	45.3	57.3
3-4	60.6	72.6
5-6	76	88
7-8	91	103
9-10	106.5	118.5
11-12	122	134
13-14	137	149
15-16	152	164
17-18	168	180
19-20	183	195
21-22	198	210
23-24	214	226
25-26	229	241
27-28	244	256
29-30	260	272

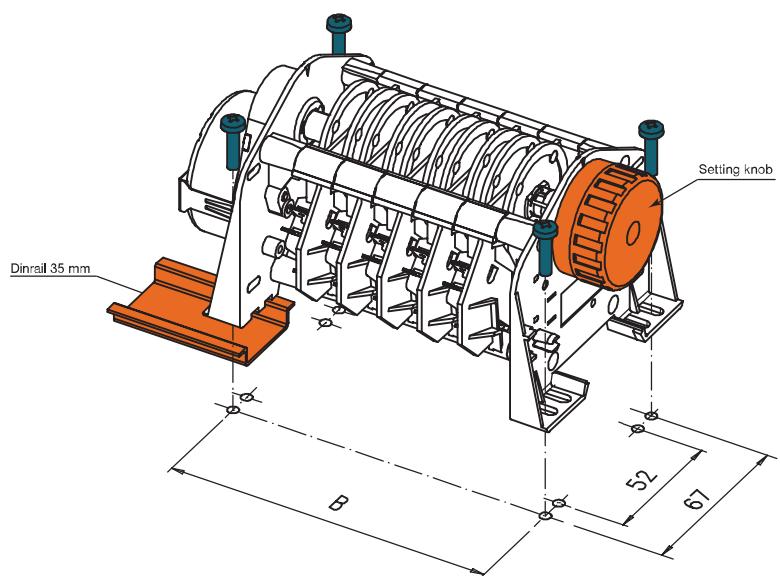

Synchronous cam programmer, with adjustable segment cams


With key and setting knob.

Market

Healthcare & Medical Equipment, Personal Care, Building Automation & Security, White Goods, Home Appliances, Heating Ventilation & Air Conditioning, Industrial equipment & automation, Business Machines

Application

toilet cabins, swimming pool, fountain variables, fog horn, bell towers, defrosting, heating ventilation, automation, galvano, test equipment, food specialities, bottling, newspaper, milk truck cleaning, carwash, milking equipment, bookbinding, Vending machines, feeding systems

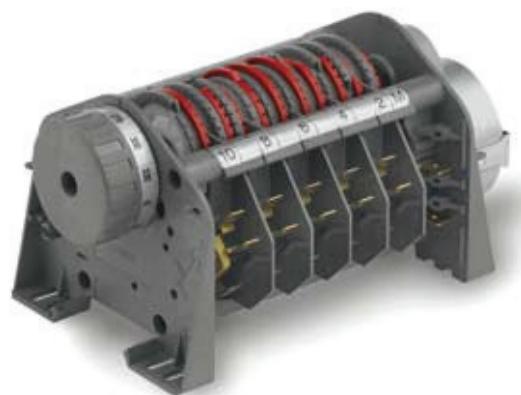

Characteristics

	standard	optional	on request
Program	segment cams adjustable by customer		
Nbre channels	max. 30 Typ 4, 6, 8, 12, 20 program channels		
Prog. duration	from 10 sec to 120 h		
Driving	unidirectional synchronous motor		
Voltage	230 V, 50 Hz or 110 V, 60 Hz		other voltages on request
Switching power	12 (6) A; UL 10 A		other switching power on request
Approvals	standard EC	UL approval	

Order Reference

Type	Cam Programmer with unidirectional synchronous motor with S (segment) cams and external knob										KKD02	C	01	J4	E1	N	00														
Number of channels	1	2	3	4	5	6	7	8	9	10	A	B	C																		
	1	2	3	4	5	6	7	8	9	11																					
	13	14	15	16	18	20	22	24	25	26																					
	D	E	F	G	J	M	P	R	S	T																					
											V	W																			
Programm duration	B1	1 s	B2	10 s	D3	1.25 min	R3	6 min	K4	36 min																					
	E1	1.5 s	C2	12 s	E3	1.5 min	S3	7.5 min	B5	1 h																					
	J1	3 s	E2	15 s	F3	2 min	B4	10 min	E5	1.5 h	S5	7.5 h																			
	M1	4 s	F2	20 s	J3	3 min	E4	15 min	F5	2 h	B6	10 h																			
	Q1	5 s	J2	30 s	M3	4 min	W4	18 min	J5	3 h	C6	12 h																			
	R1	6 s	B3	1 min	Q3	5 min	J4	30 min	R5	6 h	G6	24 h																			
Supply voltage	B4	24 V 50 Hz	E1	230 V 50 Hz	J1	110 V 60 Hz																									
Approval	N	standard EC	U	with UL-CSA approval																											
Execution	00	standard																													
	01 to 99	specific customer execution																													
On request	other program duration			other voltage			motor cw instead of ccw			higher electrical rating of microswitches																					
Accessories																															

Circuit diagram and dimensions: see page 191

Synchronous cam programmer, with adjustable cam riders


With key and setting knob.

Market

Healthcare & Medical Equipment, Personal Care, Building Automation & Security, White Goods, Home Appliances, Heating Ventilation & Air Conditioning, Industrial equipment & automation, Business Machines

Application

toilet cabins, swimming pool, fountain variables, fog horn, bell towers, defrosting, heating ventilation, automation, galvano, test equipment, food specialities, botteling, newspaper, milk truck cleaning, carwash, milking equipment, bookbinding, Vending machines, feeding systems

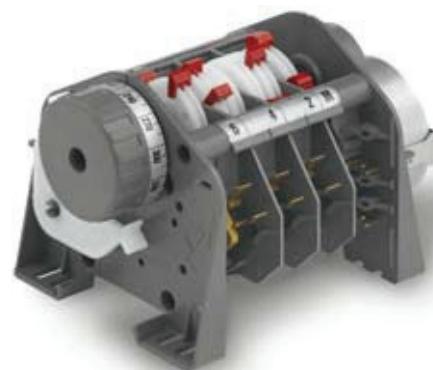

Characteristics

	standard	optional	on request
Program	*snap-on rider cams adjustable by customer		
Nbre channels	max. 30 Typ 4, 6, 8, 12, 20 program channels		
Prog. duration	from 10 sec to 120 h		
Driving	unidirectional synchronous motor		
Voltage	230 V, 50 Hz or 110 V, 60 Hz		other voltages on request
Switching power	12 (6) A; UL 10 A		other switching power on request
Approvals	standard EC	UL approval	

Order Reference

Type	Cam Programmer with unirotational synchronous motor with S (segment) cams and external knob												KKD02	8	02	F3	E1	N	00														
Number of channels	1	2	3	4	5	6	7	8	9	10	11	12																					
	1	2	3	4	5	6	7	8	9	A	B	C																					
	13	14	15	16	18	20	22	24	25	26	28	30																					
	D	E	F	G	J	M	P	R	S	T	V	W																					
Programm duration	B1	1 s	B2	10 s	D3	1.25 min	R3	6 min	K4	36 min																							
	E1	1.5 s	C2	12 s	E3	1.5 min	S3	7.5 min	B5	1 h																							
	J1	3 s	E2	15 s	F3	2 min	B4	10 min	E5	1.5 h	S5	7.5 h																					
	M1	4 s	F2	20 s	J3	3 min	E4	15 min	F5	2 h	B6	10 h																					
	Q1	5 s	J2	30 s	M3	4 min	W4	18 min	J5	3 h	C6	12 h																					
	R1	6 s	B3	1 min	Q3	5 min	J4	30 min	R5	6 h	G6	24 h																					
Supply voltage	B4	24 V 50 Hz	E1	230 V 50 Hz	J1	110 V 60 Hz																											
Approval	N	standard EC	U	with UL-CSA approval																													
Execution	00	standard																															
	01 to 99	specific customer execution																															
On request	other program duration				other voltage				motor cw instead of ccw				higher electrical rating of microswitches																				
Accessories	additional 6° snap-on riders for R-cams				4 264 4802 0				additional 12° snap-on riders for R-cams				4 264 4801 0																				

Circuit diagram and dimensions: see page 191

Synchronous cam programmer, with 2-speed rotation.

The fast motor allows a very accuracy sequence inserted within a long process.

Market

Healthcare & Medical Equipment, Personal Care, Building Automation & Security, White Goods, Home Appliances, Heating Ventilation & Air Conditioning, Industrial equipment & automation, Business Machines

Application

swiming pool, fountain variables, fog horn, bell towers, defrosing, heating ventilation, automation, galvano, test equipment, food specialities, botteling, newspaper, milk truck cleannning, carwash, milking equipment, bookbinding, Vending machines, feeding systems



Characteristics


standard	optional	on request
Program two motors two speed	with adjusable segment «S» cams or jumper «R» cams	
Nbre channels max. 30		
Prog. duration from 10 sec to 120 h		
Driving 2 unidirectional synchronous motors		
Voltage 230 V, 50 Hz or 110 V, 60 Hz		other voltages on request
Switching power 12 (6) A; UL 10 A		other switching power on request
Approvals standard EC	UL approval	

Order Reference




Type	Cam Programmer with unirotational synchronous motor										KKD1	1	C	01	B5	E1	N	B2
Setting knob	0 without knob 1 with internal knob																	
Number of channels	1	2	3	4	5	6	7	8	9	10	11	12						
	1	2	3	4	5	6	7	8	9	A	B	C						
	13	14	15	16	18	20	22	24	25	26	28	30						
	D	E	F	G	J	M	P	R	S	T	V	W						
Type of cams diagrams	01 with S cams 02 with R cams 03 to 99 customer specific diagram number																	
Programm duration	B1 E1 J1 M1 Q1 R1	1 s 1.5 s 3 s 4 s 5 s 6 s	B2 C2 E2 F2 J2 B3	10 s 12 s 15 s 20 s 30 s 1 min	D3 E3 F3 J3 M3 Q3	1.25 min 1.5 min 2 min 3 min 4 min 5 min	R3 S3 B4 E4 W4 J4	6 min 7.5 min 10 min 15 min 18 min 30 min	K4 B5 E5 F5 J5 R5	36 min 1 h 1.5 h 2 h 3 h 6 h	S5 B6 E6 F6 C6 G6	7.5 h 10 h 12 h 24 h						
Supply voltage	B4	24 V 50 Hz	E1	230 V 50 Hz	J1	110V 60 Hz												
Approval	N	standard EC	U	with UL-CSA approval														
Second motor or execution	B1 to G6 01 to 99	(see motor program duration) specific customer execution																
On request	other voltage										higher electrical rating of microswitches							
Accessories	additional 6° snap-on riders for R-cams additional 12° snap-on riders for R-cams										4 264 4802 0							
											4 264 4801 0							

KKD1


Circuit diagram

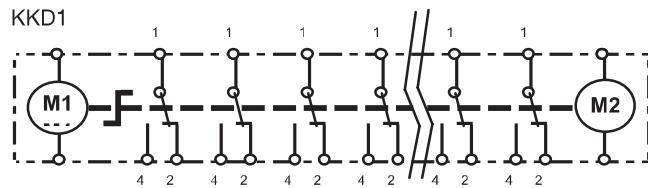

Dimensions

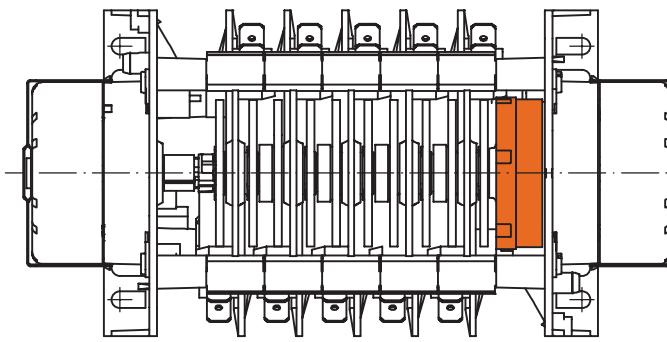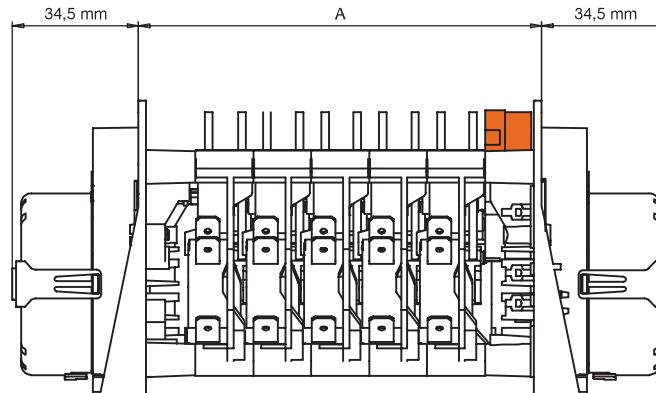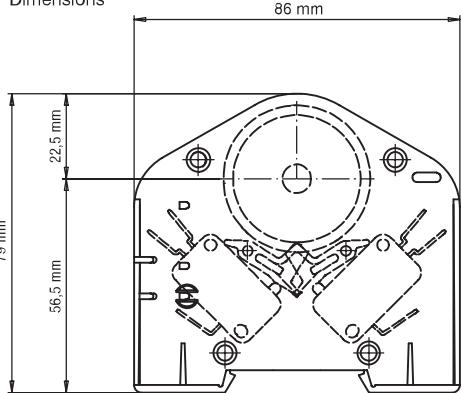

Number of program channels	Dimensions (mm)	
	A	B
1-2	45.3	57.3
3-4	60.6	72.6
5-6	76	88
7-8	91	103
9-10	106.5	118.5
11-12	122	134
13-14	137	149
15-16	152	164
17-18	168	180
19-20	183	195
21-22	198	210
23-24	214	226
25-26	229	241
27-28	244	256
29-30	260	272

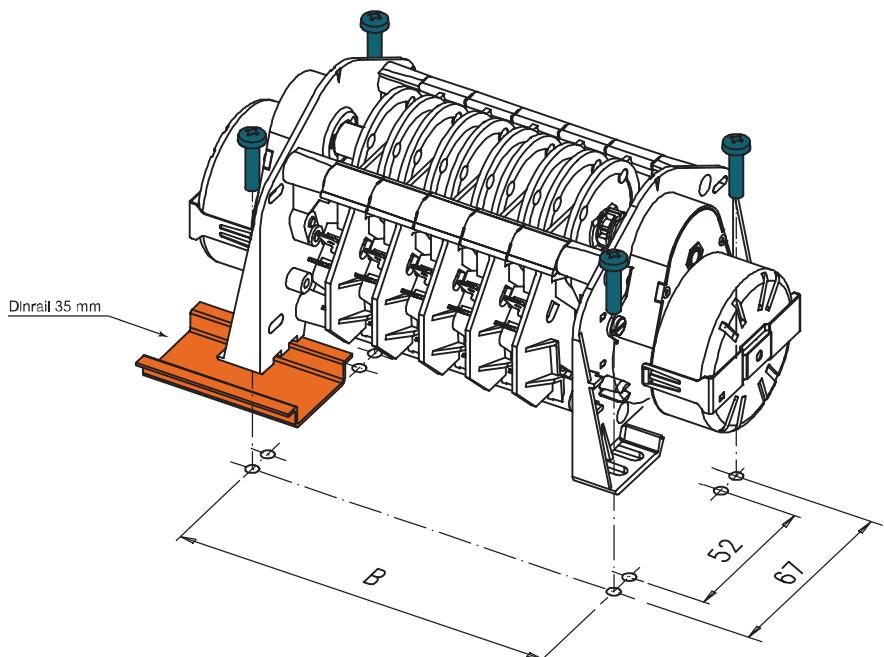

Cam programmer comprising 2 independent, synchronous programs.

Allows a precise sub-program to be called several times in the course of the program.

Market

Healthcare & Medical Equipment, Personal Care, Building Automation & Security, White Goods, Home Appliances, Heating Ventilation & Air Conditioning, Industrial equipment & automation, Business Machines

Application

swiming pool, fountain variables, fog horn, bell towers, defrosing, heating ventilation, automation, galvano, test equipment, food specialities, botteling, newspaper, milk truck cleannning, carwash, milking equipment, bookbinding, Vending machines, feeding systems



Characteristics


standard	optional	on request
Program two independant programs, driven by two motors	with adjusable segment «S» cams or jumper «R» cams	
Nbre channels max. 30		
Prog. duration from 10 sec to 120 h		
Driving 2 unidirectional synchronous motors		
Voltage 230 V, 50 Hz or 110 V, 60 Hz		other voltages on request
Switching power 12 (6) A; UL 10 A		other switching power on request
Approvals standard EC	UL approval	

Order Reference




Type	Cam Programmer with unirotational synchronous motor										KKD7	1	C	01	B5	E1	N	B2
Setting knob	0 without knob 1 with 2 internal knob																	
Number of channels	1	2	3	4	5	6	7	8	9	10	11	12						
	1	2	3	4	5	6	7	8	9	A	B	C						
	13	14	15	16	18	20	22	24	25	26	28	30						
	D	E	F	G	J	M	P	R	S	T	V	W						
Type of cams diagrams	01 with S cams 02 with R cams 03 to 99 customer specific diagram number																	
Programm duration	B1	1 s	B2	10 s	D3	1.25 min	R3	6 min	K4	36 min								
	E1	1.5 s	C2	12 s	E3	1.5 min	S3	7.5 min	B5	1 h								
	J1	3 s	E2	15 s	F3	2 min	B4	10 min	E5	1.5 h	S5	7.5 h						
	M1	4 s	F2	20 s	J3	3 min	E4	15 min	F5	2 h	B6	10 h						
	Q1	5 s	J2	30 s	M3	4 min	W4	18 min	J5	3 h	C6	12 h						
	R1	6 s	B3	1 min	Q3	5 min	J4	30 min	R5	6 h	G6	24 h						
Supply voltage	B4	24 V 50 Hz	E1	230 V 50 Hz	J1	110V 60 Hz												
Approval	N	standard EC	U	with UL-CSA approval														
Second motor or execution	B1 to G6 (see motor program duration) 01 to 99 specific customer execution																	
On request	other voltage higher electrical rating of microswitches																	
Accessories	additional 6° snap-on riders for R-cams 4 264 4802 0 additional 12° snap-on riders for R-cams 4 264 4801 0																	

KKD7


Circuit diagram

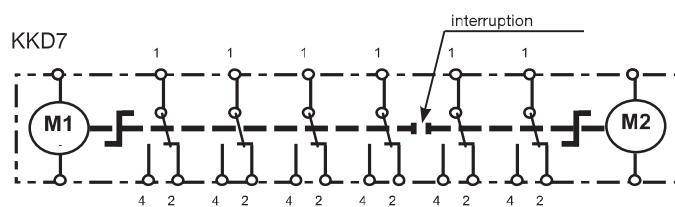

Dimensions

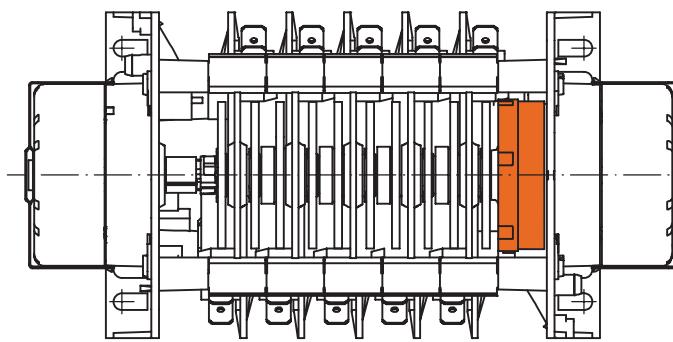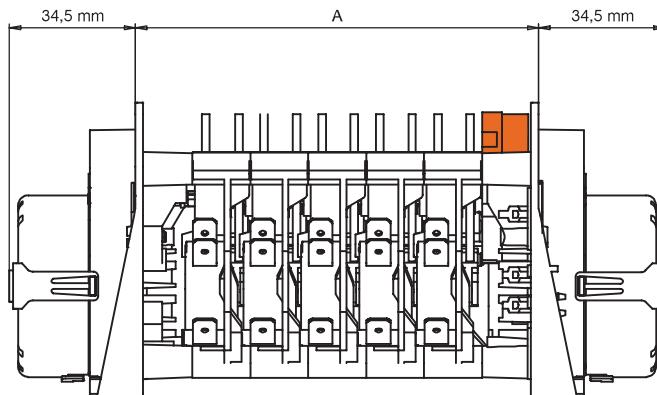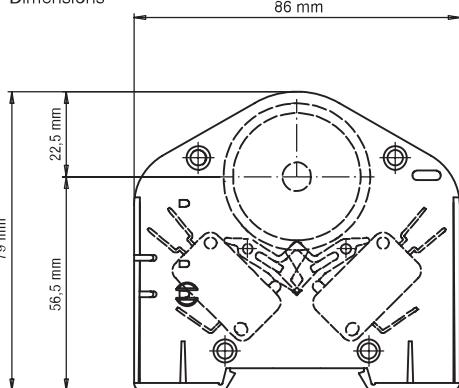

Number of program channels	Dimensions (mm)	
	A	B
1-2	45.3	57.3
3-4	60.6	72.6
5-6	76	88
7-8	91	103
9-10	106.5	118.5
11-12	122	134
13-14	137	149
15-16	152	164
17-18	168	180
19-20	183	195
21-22	198	210
23-24	214	226
25-26	229	241
27-28	244	256
29-30	260	272

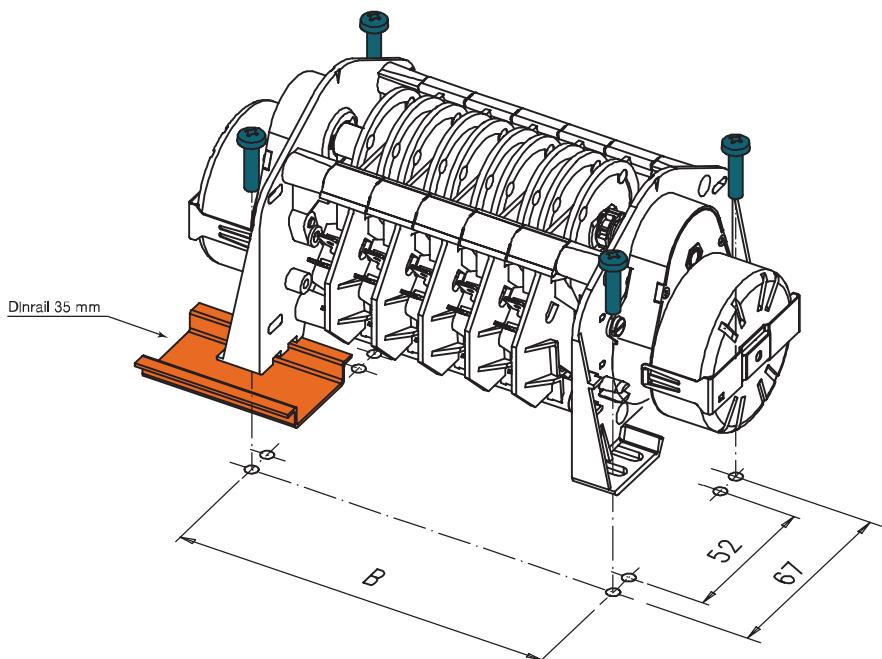

Bidirectional, synchronous programmer.


Allows the flow of a program to be inverted. For turning the program off in reverse order.

Market

Healthcare & Medical Equipment, Personal Care, Building Automation & Security, White Goods, Home Appliances, Heating Ventilation & Air Conditioning, Industrial equipment & automation, Business Machines

Application

swimming pool, fountain variables, fog horn, bell towers, heating ventilation, automation, galvano, test equipment, food specialities, bottling, newspaper, Vending machines, feeding systems

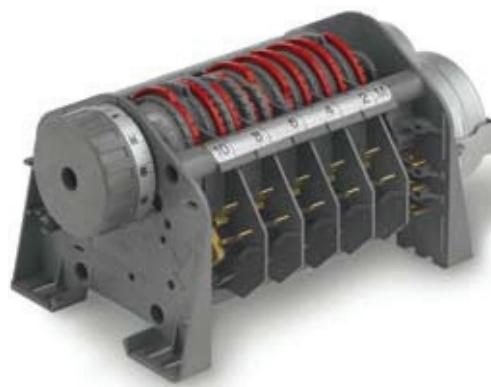

Characteristics


Program	standard bidirectional	optional with adjustable segment «S» cams or jumper «R» cams	on request
Nbre channels	max. 30		
Prog. duration	from 10 sec to 120 h		
Driving	bidirectional synchronous motor		
Voltage	230 V, 50 Hz or 110 V, 60 Hz		other voltages on request
Switching power	12 (6) A; UL 10 A		other switching power on request
Approvals	standard EC	UL approval	

Order Reference




Type	Cam Programmer with birotational synchronous motor												KKD2	2	M	01	E4	E1	N	00												
Setting knob	0	without knob																														
	2	with external knob																														
Number of channels	1	2	3	4	5	6	7	8	9	10	11	12																				
	1	2	3	4	5	6	7	8	9	A	B	C																				
	13	14	15	16	18	20	22	24	25	26	28	30																				
	D	E	F	G	J	M	P	R	S	T	V	W																				
Type of cams diagrams	01	with S cams																														
	02	with R cams																														
	03 to 99	customer specific diagram number																														
Programm duration	B1	1 s	B2	10 s	D3	1.25 min	R3	6 min	K4	36 min																						
	E1	1.5 s	C2	12 s	E3	1.5 min	S3	7.5 min	B5	1 h																						
	J1	3 s	E2	15 s	F3	2 min	B4	10 min	E5	1.5 h	S5	7.5 h																				
	M1	4 s	F2	20 s	J3	3 min	E4	15 min	F5	2 h	B6	10 h																				
	Q1	5 s	J2	30 s	M3	4 min	W4	18 min	J5	3 h	C6	12 h																				
	R1	6 s	B3	1 min	Q3	5 min	J4	30 min	R5	6 h	G6	24 h																				
Supply voltage	B4	24 V 50 Hz	E1	230 V 50 Hz	J1	110V 60 Hz																										
Approval	N	standard EC	U	with UL-CSA approval																												
Execution	00	standard																														
	01 to 99	specific customer execution																														
On request	other program duration				other voltage				higher electrical rating of microswitches																							
Accessories	additional 6° snap-on riders for R-cams				4 264 4802 0				additional 12° snap-on riders for R-cams				4 264 4801 0																			

KKD2


Circuit diagram

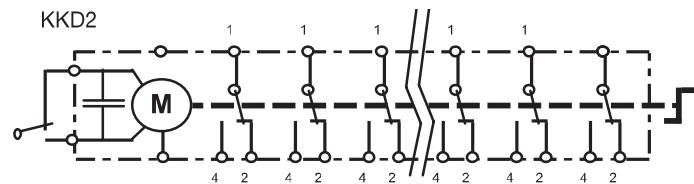

Dimensions

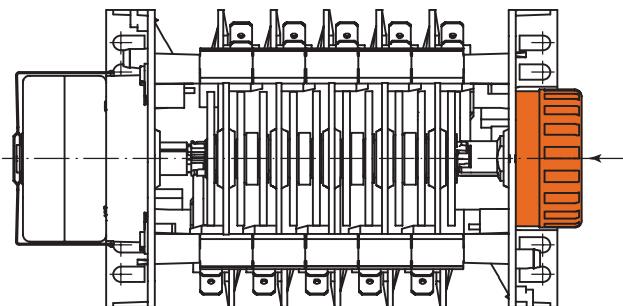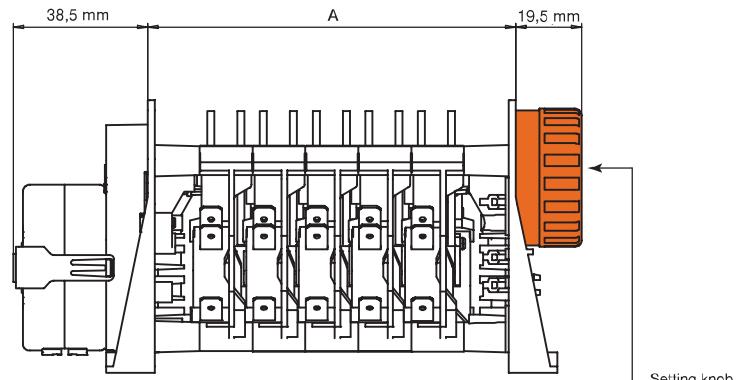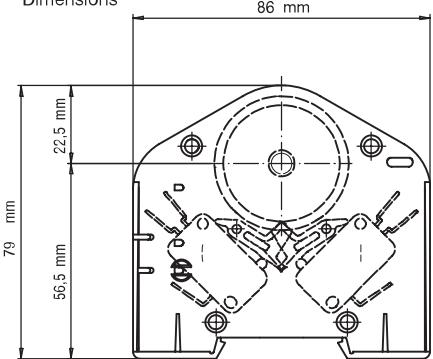

Number of program channels	Dimensions (mm)	
	A	B
1-2	45.3	57.3
3-4	60.6	72.6
5-6	76	88
7-8	91	103
9-10	106.5	118.5
11-12	122	134
13-14	137	149
15-16	152	164
17-18	168	180
19-20	183	195
21-22	198	210
23-24	214	226
25-26	229	241
27-28	244	256
29-30	260	272

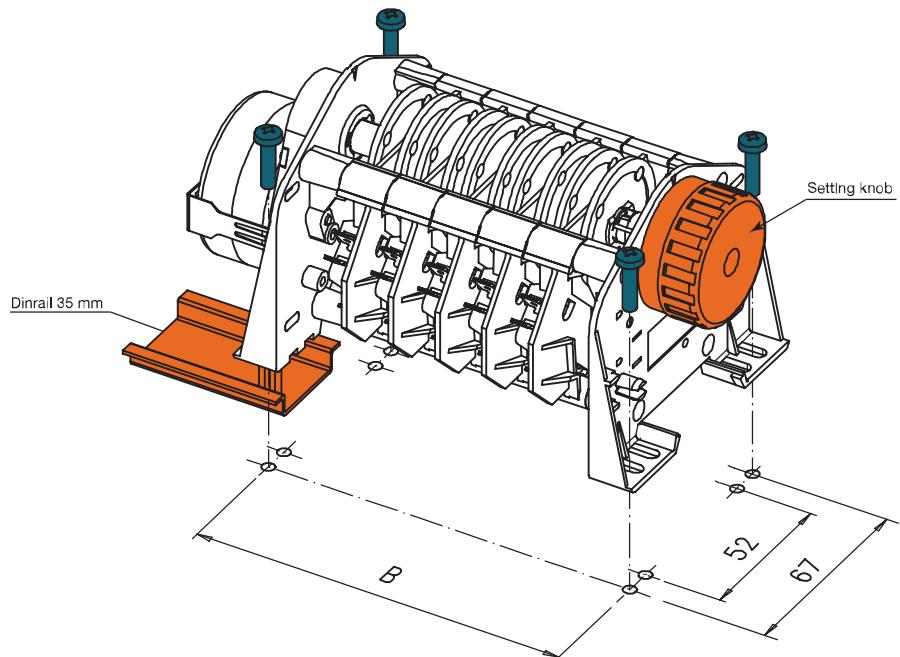

Bidirectional, synchronous programmer equipped with a 1 kOhm potentiometer.

Allows the angular position of the axis to be read remotely.



Market

Healthcare & Medical Equipment, Personal Care, Building Automation & Security, White Goods, Home Appliances, Heating Ventilation & Air Conditioning, Industrial equipment & automation, Business Machines

Application

swiming pool, fountain variables, fog horn, bell towers, heating ventilation, automation, galvano, test equipment, food specialities, botteling, newspaper, Vending machines, feeding systems

Characteristics


	standard	optional	on request
Program	bidirectional with potentiometer 1 k ohm	with adjustable segment «S» cams or jumper «R» cams	other potentiometer value
Nbre channels	max. 30		
Prog. duration	from 10 sec to 120 h		
Driving	bidirectional synchronous motor		
Voltage	230 V, 50 Hz or 110 V, 60 Hz		other voltages on request
Switching power	12 (6) A; UL 10 A		other switching power on request
Approvals	standard EC	UL approval	

Order Reference




Type	Cam Programmer with birotational synchronous motor with potentiometer 1 kOhm												KKD3	1	6	02	B4	E1	N	00							
Setting knob	0	without knob																									
	1	with internal knob																									
Number of channels	1	2	3	4	5	6	7	8	9	10	11	12															
	1	2	3	4	5	6	7	8	9	A	B	C															
	13	14	15	16	18	20	22	24	25	26	28	30															
	D	E	F	G	J	M	P	R	S	T	V	W															
Type of cams diagrams	01	with S cams																									
	02	with R cams																									
	03 to 99	customer specific diagram number																									
Programm duration	B1	1 s	B2	10 s	D3	1.25 min	R3	6 min	K4	36 min																	
	E1	1.5 s	C2	12 s	E3	1.5 min	S3	7.5 min	B5	1 h																	
	J1	3 s	E2	15 s	F3	2 min	B4	10 min	E5	1.5 h	S5	7.5 h															
	M1	4 s	F2	20 s	J3	3 min	E4	15 min	F5	2 h	B6	10 h															
	Q1	5 s	J2	30 s	M3	4 min	W4	18 min	J5	3 h	C6	12 h															
	R1	6 s	B3	1 min	Q3	5 min	J4	30 min	R5	6 h	G6	24 h															
Supply voltage	B4	24 V 50 Hz	E1	230 V 50 Hz	J1	110V 60 Hz																					
Approval	N	standard EC	U	with UL-CSA approval																							
Execution	00	standard																									
	01 to 99	specific customer execution																									
On request	other program duration				other voltage				higher electrical rating of microswitches				other potentiometer value on KKD3 (50 Ohm to 10kOhm)														
Accessories	additional 6° snap-on riders for R-cams												4 264 4802 0														
	additional 12° snap-on riders for R-cams												4 264 4801 0														

KKD3


Circuit diagram

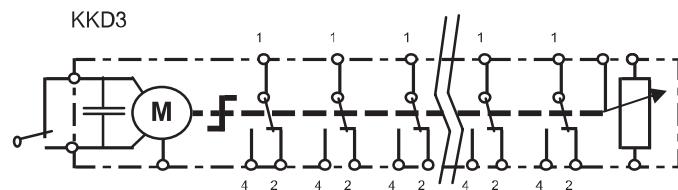

Dimensions

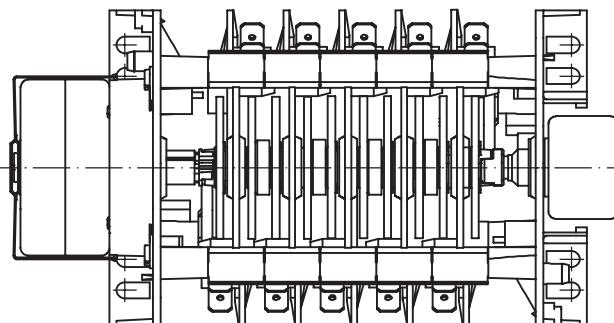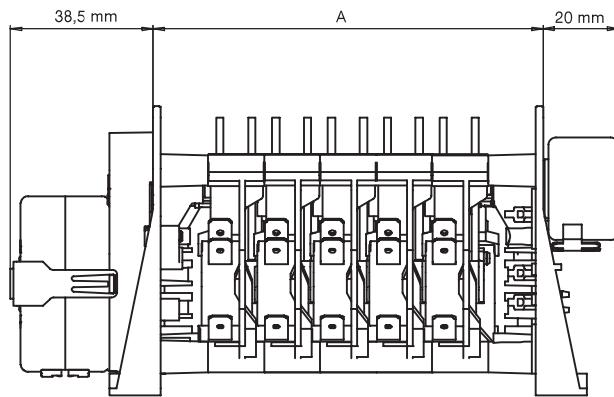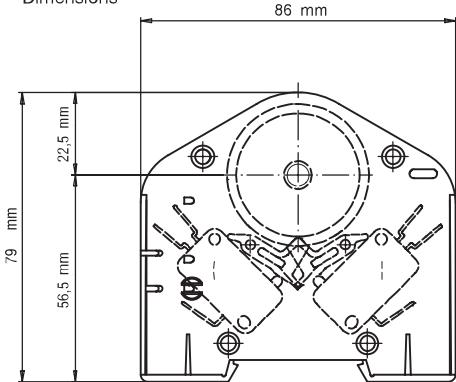

Number of program channels	Dimensions (mm)	
	A	B
1-2	45.3	57.3
3-4	60.6	72.6
5-6	76	88
7-8	91	103
9-10	106.5	118.5
11-12	122	134
13-14	137	149
15-16	152	164
17-18	168	180
19-20	183	195
21-22	198	210
23-24	214	226
25-26	229	241
27-28	244	256
29-30	260	272

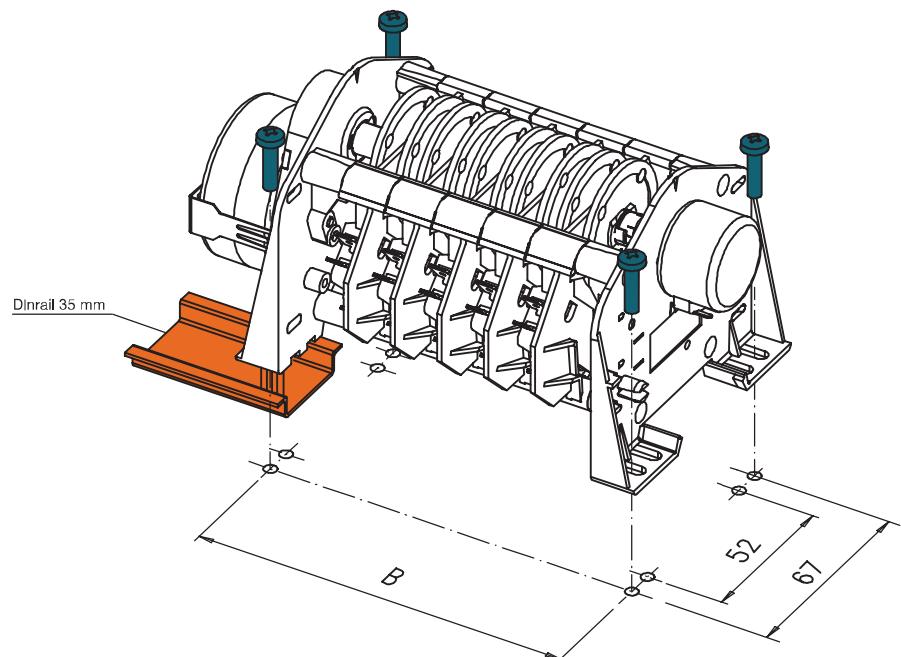

Stepper-motor driven cam programmer.

Allows free program flow in both directions, rotating at different speeds, incorporating stops, accelerations, returns, etc.

Market

Healthcare & Medical Equipment, Personal Care, Building Automation & Security, White Goods, Home Appliances, Heating Ventilation & Air Conditioning, Industrial equipment & automation, Business Machines

Application

swimming pool, fountain variables, fog horn, bell towers, heating ventilation, automation, galvano, test equipment, food specialities, botteling, newspaper, milk truck cleannning, carwash, milking equipment, bookbinding, Vending machines, feeding systems



Characteristics


standard	optional	on request
Program with stepper motor	with adjustable segment «S» cams or jumper «R» cams	
Nbre channels	max. 30	
Prog. duration	from 10 sec to 120 h	
Driving	birotational stepper motor	
Voltage	230 V, 50 Hz or 110 V, 60 Hz	other voltages on request
Switching power	12 (6) A; UL 10 A	other switching power on request
Approvals	standard EC	UL approval

Order Reference




Type	Cam Programmer with birotational stepper motor										KKD6	2	C	02	B4	M1	N	00	
Setting knob	0	without knob																	
	2	with external knob																	
Number of channels	1	2	3	4	5	6	7	8	9	10	11	12							
	1	2	3	4	5	6	7	8	9	A	B	C							
	13	14	15	16	18	20	22	24	25	26	28	30							
	D	E	F	G	J	M	P	R	S	T	V	W							
Type of cams diagrams	01	with S cams																	
	02	with R cams																	
	03 to 99	customer specific diagram number																	
Programm duration (at typical frequency 200 Hz)	B1	1 s	B2	10 s	D3	1.25 min	R3	6 min	K4	36 min									
	E1	1.5 s	C2	12 s	E3	1.5 min	S3	7.5 min	B5	1 h									
	J1	3 s	E2	15 s	F3	2 min	B4	10 min	E5	1.5 h	S5	7.5 h							
	M1	4 s	F2	20 s	J3	3 min	E4	15 min	F5	2 h	B6	10 h							
	Q1	5 s	J2	30 s	M3	4 min	W4	18 min	J5	3 h	C6	12 h							
	R1	6 s	B3	1 min	Q3	5 min	J4	30 min	R5	6 h	G6	24 h							
Supply voltage	M1	12 VDC																	
Approval	N	standard EC											U	with UL-CSA approval					
Execution	00	standard																	
	01 to 99	specific customer execution																	
On request	other program duration										other voltage				higher electrical rating of microswitches				
Accessories	additional 6° snap-on riders for R-cams										4 264 4802 0	Electronic driving board Samotronic 102				see page 183			
	additional 12° snap-on riders for R-cams										4 264 4801 0								

KKD6


Circuit diagram

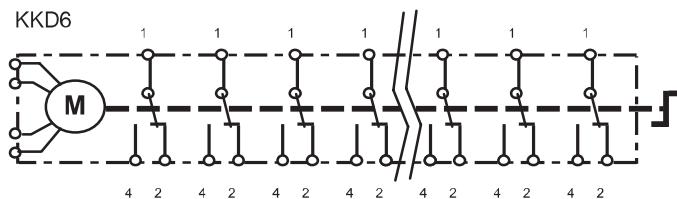

Dimensions

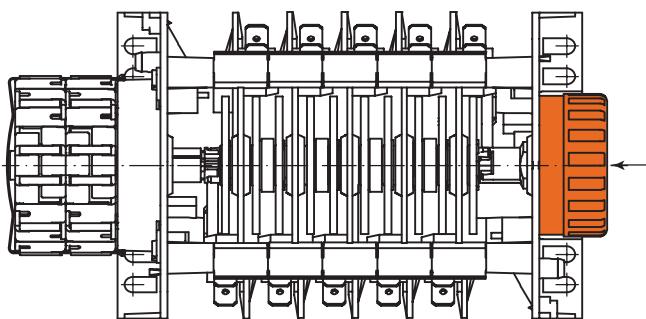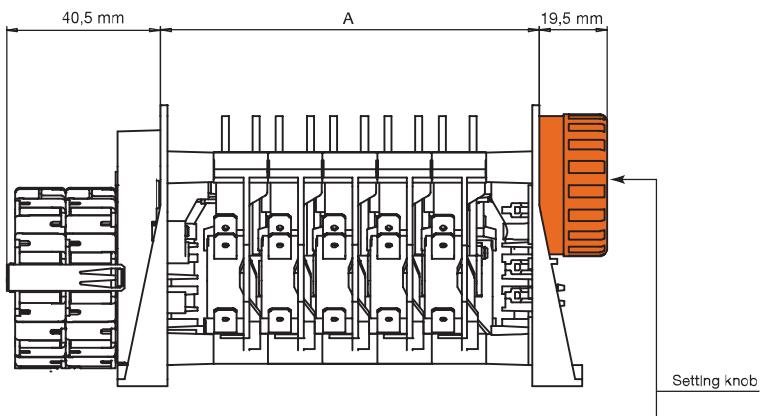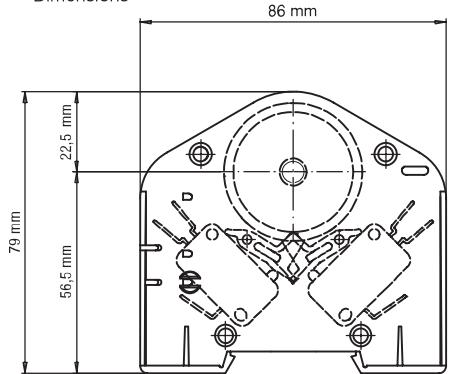

Number of program channels	Dimensions (mm)	
	A	B
1-2	45.3	57.3
3-4	60.6	72.6
5-6	76	88
7-8	91	103
9-10	106.5	118.5
11-12	122	134
13-14	137	149
15-16	152	164
17-18	168	180
19-20	183	195
21-22	198	210
23-24	214	226
25-26	229	241
27-28	244	256
29-30	260	272

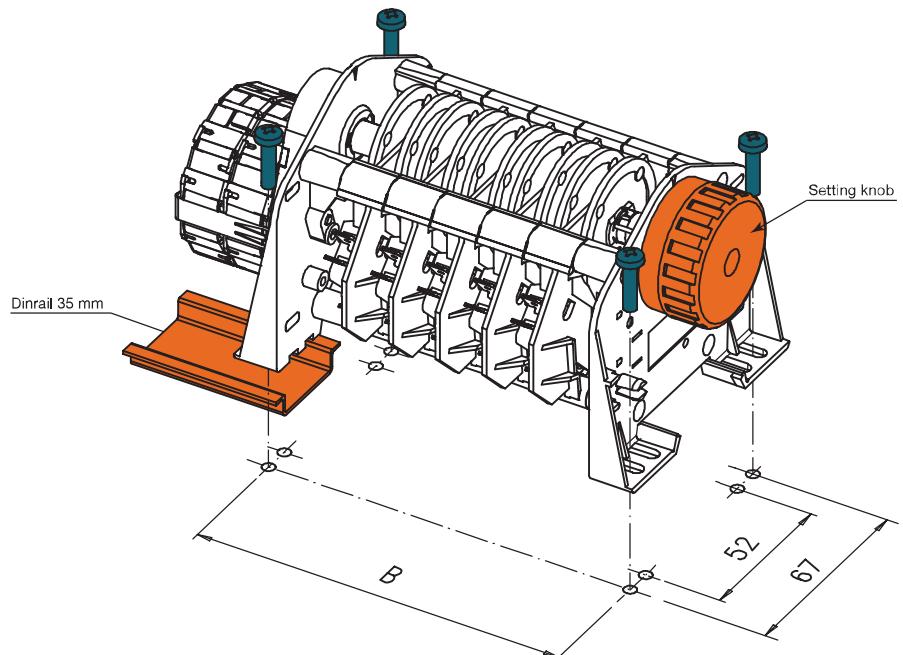

Cam programmer without motor.

Rotation of the axis is initiated by an exterior drive.

Market

Heating Ventilation & Air Conditioning, Industrial equipment & automation,
Business Machines

Application

heating ventilation, food specialities, bookbinding, feeding systems



Characteristics

standard	optional	on request
Program no motor but shaft for external driving	with adjustable segment «S» cams or jumper «R» cams	
Nbre channels max. 30		
Prog. duration following customers driving		
Driving no motor		
Switching power 12 (6) A; UL 10 A		other switching power on request
Approvals standard EC	UL approval	


Order Reference

Type	Cam Programmer without motor and gearbox												KKD4	2	6	01	A0 X8	N	00
Setting knob	0	without knob																	
	1	with internal knob																	
	2	with external knob																	
Number of channels	1	2	3	4	5	6	7	8	9	10	11	12							
	1	2	3	4	5	6	7	8	9	A	B	C							
	13	14	15	16	18	20	22	24	25	26	28	30							
	D	E	F	G	J	M	P	R	S	T	V	W							
Type of cams diagrams	01	with S cams																	
	02	with R cams																	
	03 to 99	customer specific diagram number																	
Approval	N	standard EC	U	with UL-CSA approval															
Execution	00	standard																	
	01 to 99	specific customer execution																	
On request	higher electrical rating of microswitches												shaft with special length						
Accessories	additional 6° snap-on riders for R-cams												4 264 4802 0						
	additional 12° snap-on riders for R-cams												4 264 4801 0						



KKD4

Circuit diagram


KKD4

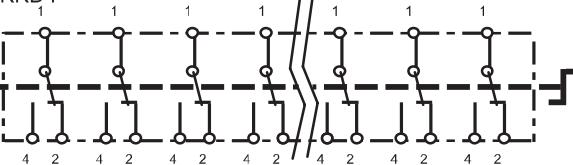


Dimensions

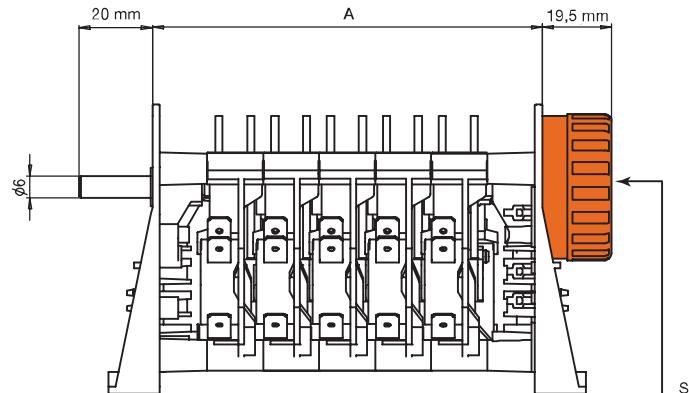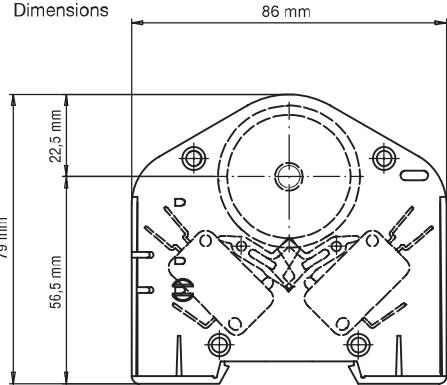


Setting knob

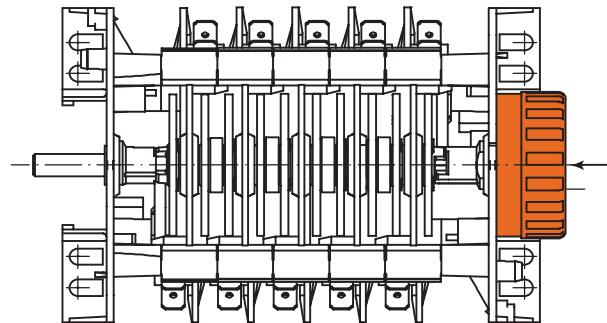

Number of program channels	Dimensions (mm)	
	A	B
1-2	45.3	57.3
3-4	60.6	72.6
5-6	76	88
7-8	91	103
9-10	106.5	118.5
11-12	122	134
13-14	137	149
15-16	152	164
17-18	168	180
19-20	183	195
21-22	198	210
23-24	214	226
25-26	229	241
27-28	244	256
29-30	260	272

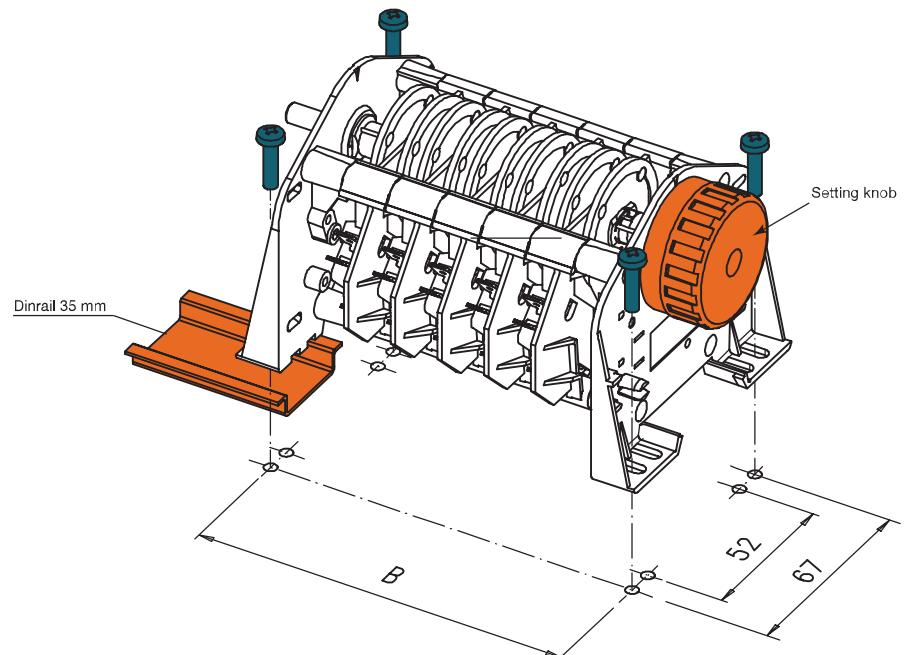

Hand settable timers

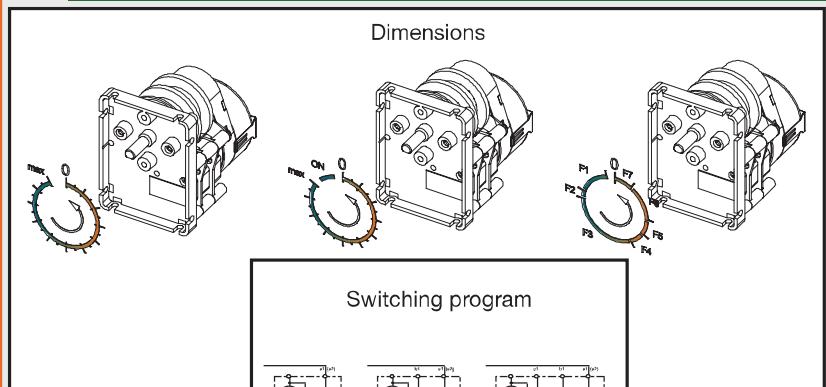

 JOHNSON
ELECTRIC

innovating motion

www.contact-evolution.com

Synchronous timers with manual control.


Large choice of time range.

Market

Healthcare & Medical Equipment, Personal Care, Building Automation & Security, White Goods, Home Appliances, Heating Ventilation & Air Conditioning, Industrial equipment & automation, Business Machines

Application

hair dryers, solariums, saunas, whirepool, swiming pool, fountain variables, fog horn, bell towers, coffee machine, heating ventilation, pottery ovens, automation, galvano, test equipment, food specialities, botteling, newspaper, milk truck cleannning, carwash, battery loader, milking equipment, drying, bookbinding, Vending machines, feeding systems

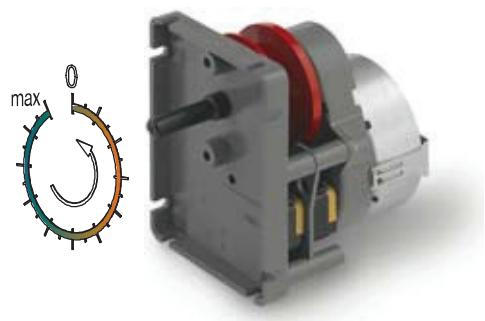


Characteristics

standard	optional	on request
Program	with adjusables segment «S» cams or jumper «R» cams	
Nbre channels	1, 2 or 3	
Prog. duration	1 min to 24 h	
Driving	unidirectional synchronous motor	
Voltage	230 V, 50 Hz or 110 V, 60 Hz	other voltages on request
Switching power	16 (6) A; UL 15 A	other switching power on request
Approvals	standard EC	UL approval


Order Reference

Type	Hand settable timer								KKH	3	0	200	E4	E1	N	00													
Shaft	1	shaft with flat (5mm)																											
	3	round shaft																											
Fixing	0	fixing by self tapping screws																											
	3	fixing by M3 screws																											
	4	fixing by M4 screws																											
Number of channels	100	1 channel																											
	200	2 channels																											
	300	3 channels																											
Programm duration	B2	10 s	B3	1 min	M3	4 min	E4	15 min	E5	1.5 h																			
	C2	12 s	D3	1.25 min	Q3	5 min	W4	18 min	F5	2 h																			
	E2	15 s	E3	1.5 min	R3	6 min	J4	30 min	J5	3 h	B6	10 h																	
	F2	20 s	F3	2 min	S3	7.5 min	K4	36 min	R5	6 h	C6	12 h																	
	J2	30 s	J3	3 min	B4	10 min	B5	1 h	S5	7.5 h	G6	24 h																	
Supply voltage	B4	24 V 50 Hz	E1	230 V 50 Hz	J1	110 V 60 Hz																							
Approval	N	standard EC	U	with UL-CSA approval																									
Execution	00	standard																											
	01 to 99	specific customer execution																											
On request	shaft with flat (4.6mm) instead of 5mm				shaft with special length 20 or 25mm instead of 15mm				other program duration								other voltage												
Accessories	Self tapping screw (to fix the KKH are 2 pcs needed)															4 184 4004 0													
	Setting knob with arrow (for output shaft without milling)															4 268 4887 0													
	Setting knob with arrow (for output shaft with 5mm flat)															4 268 5051 0													
	Scale (for fixing dist. 30mm)																												
	5 min	4 328 4887 5			30 min	4 328 4875 5			6 h	4 328 4800 5																			
	6 min	4 328 4858 5			60 min	4 328 4859 5			12 h	4 328 4860 5																			
	15 min	4 328 4872 5			120 min	4 328 4873 5			24 h	4 328 4870 5																			



Circuit diagram KKH--100

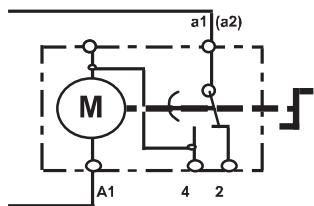


KKH--200

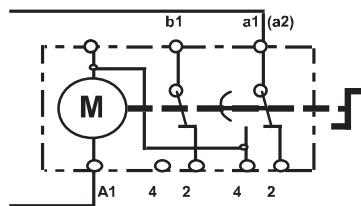


KKH--300

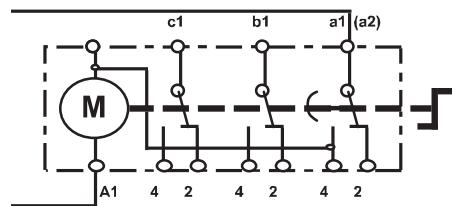


motor and load on same switch

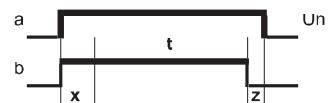


$x = \text{ad} \text{ justing time}$ $z = 1\% \text{ of max. time}$

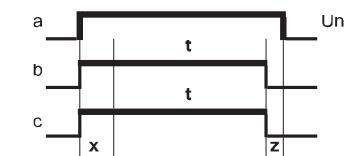


Dimensions

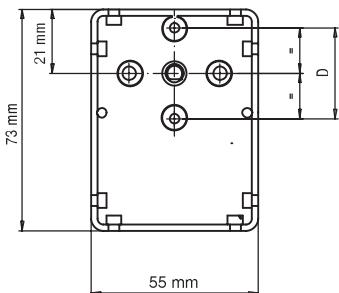



KKH--100

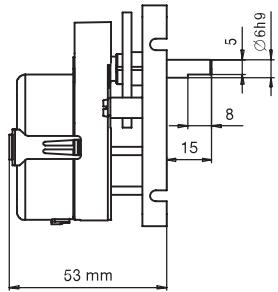

KKH--200

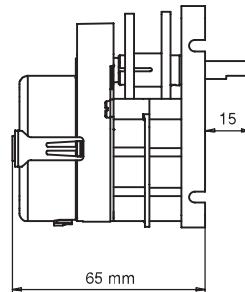

KKH--300

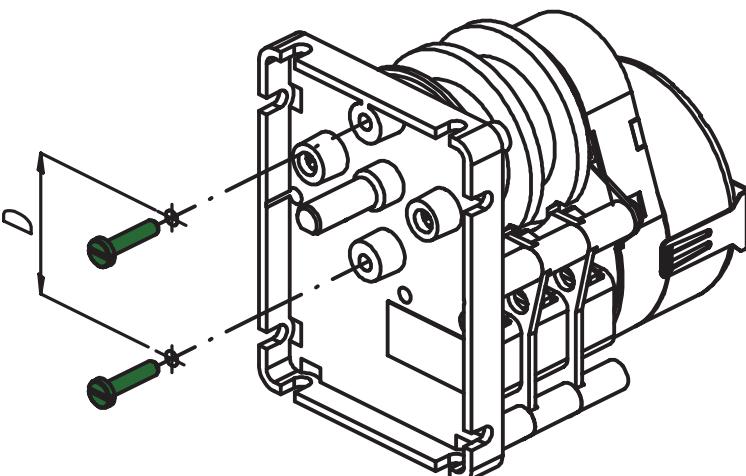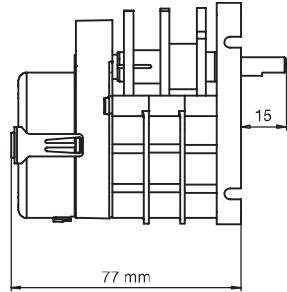

Hand settable timer

Manual timer with «on» (without timing) position.


With galvanic separated load.

Market

Healthcare & Medical Equipment, Personal Care, Building Automation & Security, White Goods, Home Appliances, Heating Ventilation & Air Conditioning, Industrial equipment & automation, Business Machines

Application

hair dryers, solariums, saunas, whirepool, swiming pool, fountain variables, fog horn, bell towers, heating ventilation, pottery ovens, automation, galvano, test equipment, food specialities, botteling, newspaper, milk truck cleaning, carwash, battery loader, milking equipment, drying, bookbinding, Vending machines, feeding systems

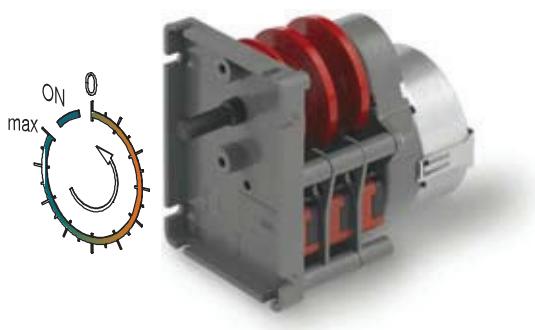

Characteristics

standard	optional	on request
Programm motor and load on separate switches	with adjustable segment «S» cams or jumper «R» cams	
Nbre channels 2 or 3		
Prog. duration 1 min to 24 h		
Driving unidirectional synchronous motor		
Voltage 230 V, 50 Hz or 110 V, 60 Hz		other voltages on request
Switching power 16 (6) A; UL 15 A		other switching power on request
Approvals standard EC	UL approval	

Order Reference

Type	Timer with «ON» position	KKH	3	0	288	R3	B4	N	00
------	--------------------------	-----	---	---	-----	----	----	---	----

Shaft **1** shaft with flat (5mm)
3 round shaft

Fixing **0** fixing by self tapping screws
3 fixing by M3 screws (dist. 30 mm)
4 fixing by M4 screws

Number of
channels **288** 2 channels
388 3 channels

Programm duration	B2 10 s	B3 1 min	M3 4 min	E4 15 min	E5 1.5 h	F5 2 h	B6 10 h
	C2 12 s	D3 1.25 min	Q3 5 min	W4 18 min	J5 30 min	C6 12 h	
	E2 15 s	E3 1.5 min	R3 6 min	J4 30 min	R5 36 min	G6 24 h	
	F2 20 s	F3 2 min	S3 7.5 min	K4 1 h	S5 7.5 h		
	J2 30 s	J3 3 min	B4 10 min	B5			

Supply voltage **B4** 24 V 50 Hz **E1** 230 V 50 Hz **J1** 110V 60 Hz

Approval **N** standard EC **U** with UL-CSA approval

Execution **00** standard
01 to 99 specific customer execution

On request shaft with flat (4.6mm) instead of 5mm
fixing distance 28.5mm instead of 30mm shaft with special length 20 or 25mm instead of 15mm
other program duration other voltage


Accessories Self tapping screw (to fix the KKH are 2 pcs needed)
Setting knob with arrow (for output shaft without milling)
Setting knob with arrow (for output shaft with 5mm flat)

4 184 4004 0
4 268 4887 0
4 268 5051 0




KKH - - 288/- -388

Circuit diagram

KKH--288

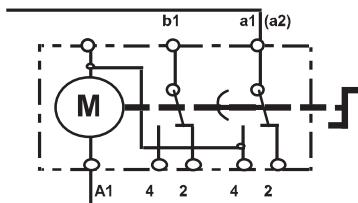


KKH--388

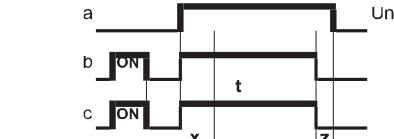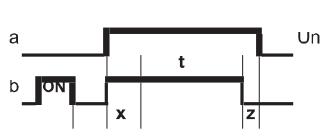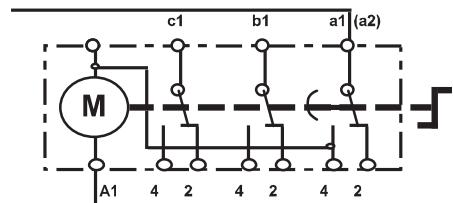





x = ad justing time z = 1% of max. time

Dimensions

KKH--288

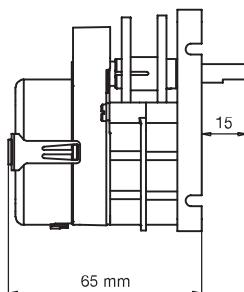

KKH--388

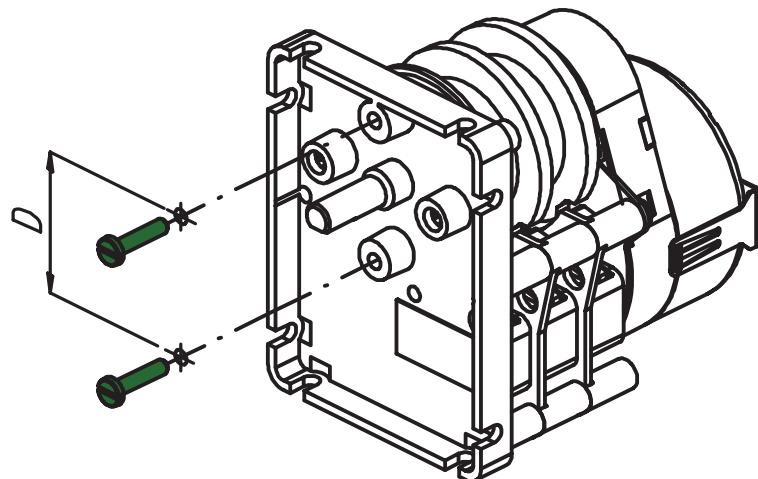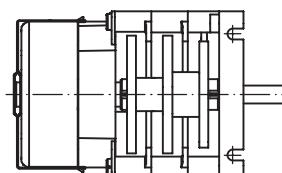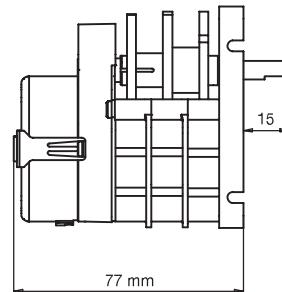

● Hand settable timer

Synchronous manual timer, 1, 2 or 3 channels


Programmed according customer's diagram.

Market

Healthcare & Medical Equipment, Personal Care, Building Automation & Security, White Goods, Home Appliances, Heating Ventilation & Air Conditioning, Industrial equipment & automation, Business Machines

Application

whirepool, swiming pool, fountain variables, fog horn, bell towers, coffee machine, heating ventilation, automation, galvano, test equipment, food specialities, botteling, newspaper, milk truck cleanning, carwash, milking equipment, bookbinding, Vending machines, feeding systems

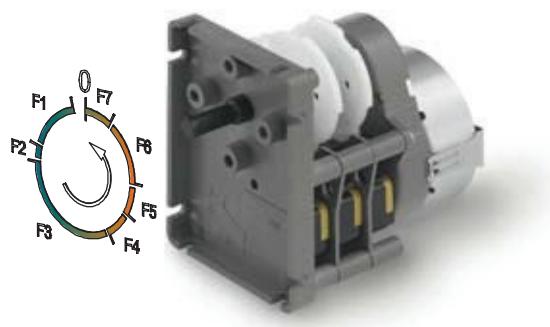


Characteristics

	standard	optional	on request
Program	milled cams according customer requests	with adjustable segment «S» cams or jumper «R» cams	
Nbre channels	2		
Prog. duration	1 min to 24 h		
Driving	unidirectional synchronous motor		
Voltage	230 V, 50 Hz or 110 V, 60 Hz		other voltages on request
Switching power	16 (6) A; UL 15 A		other switching power on request
Approvals	standard EC	UL approval	



Order Reference

Type	Hand settable programmer								KKH	3	0	3	27	B5	J1	U	00
Shaft	1	shaft with flat (5mm)															
	3	round shaft															
Fixing	0	fixing by self tapping screws															
	3	fixing by M3 screws (dist. 30 mm)															
	4	fixing by M4 screws															
Number of channels	1, 2 or 3	channels															
	03 to 77	customer specific diagram number															
Programm duration	B2	10 s	B3	1 min	M3	4 min	E4	15 min	E5	1.5 h							
	C2	12 s	D3	1.25 min	Q3	5 min	W4	18 min	F5	2 h							
	E2	15 s	E3	1.5 min	R3	6 min	J4	30 min	J5	3 h	B6	10 h					
	F2	20 s	F3	2 min	S3	7.5 min	K4	36 min	R5	6 h	C6	12 h					
	J2	30 s	J3	3 min	B4	10 min	B5	1 h	S5	7.5 h	G6	24 h					
Supply voltage	B4	24 V 50 Hz	E1	230 V 50 Hz	J1	110 V 60 Hz											
Approval	N	standard EC	U	with UL-CSA approval													
Execution	00	standard															
	01 to 99	specific customer execution															
On request	shaft with flat (4.6mm) instead of 5mm fixing distance 28.5mm instead of 30mm				shaft with special length 20 or 25mm instead of 15mm other programm duration				other voltage								
Accessories	Self tapping screw (to fix the KKH are 2 pcs needed) Setting knob with arrow Setting knob with arrow				(for output shaft without milling) (for output shaft with 5mm flat)				4 184 4004 0 4 268 4887 0 4 268 5051 0								



Circuit diagram KKH--1--

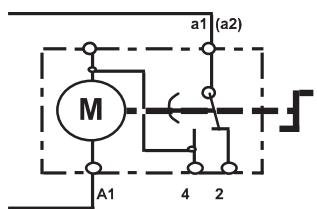

KKH--2--

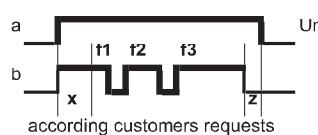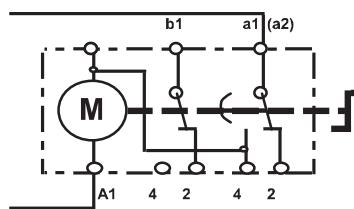


KKH--3--

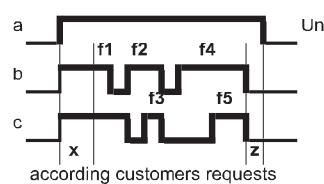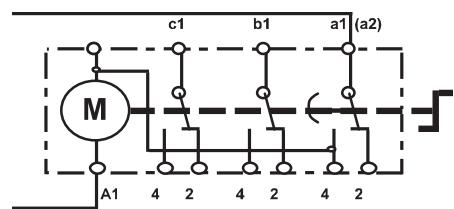


x = ad justing time z = 1% of max. time


Dimensions

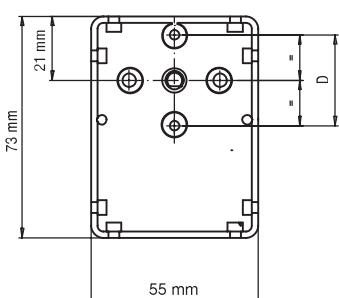






KKH--1--

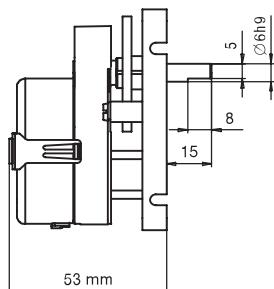

KKH--2--

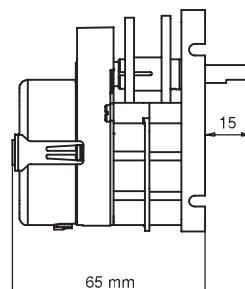

KKH--3--

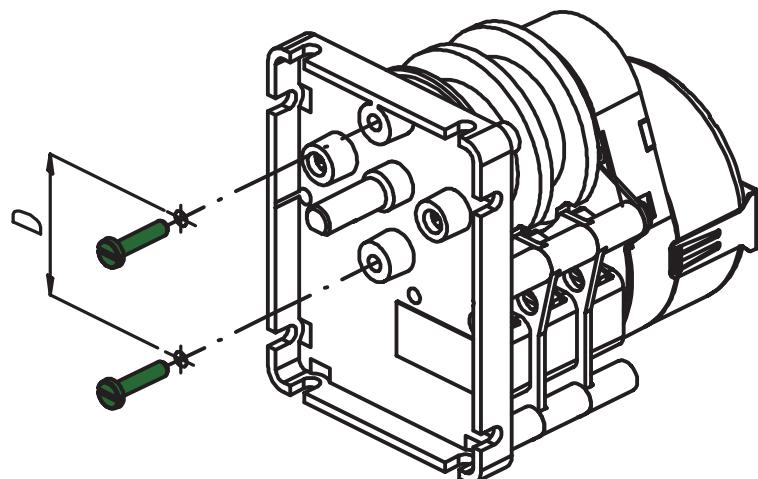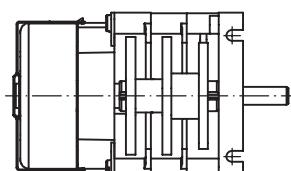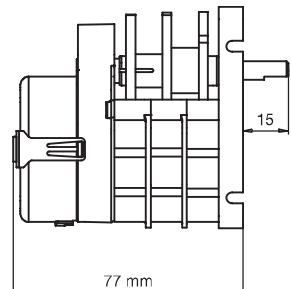

Hand settable timer

Cam Programmer's accessories

dial for KKH	(screw dist 30mm)	5 min	4 328 4887 5
		6 min	4 328 4858 5
		15 min	4 328 4872 5
		30 min	4 328 4875 5
		60 min	4 328 4859 5
		120 min	4 328 4873 5
		6 h	4 328 4800 5
		12 h	4 328 4860 5
		24 h	4 328 4870 5
		96 h	4 328 4876 5



self-tap. screw		for KKH	4 184 4004 0
-----------------	--	---------	--------------


knob with arrow	for round shaft	for KKH	4 268 4887 0
	for shaft with flat		4 268 5051 0



fixing bridle		for KKP	4 109 4815 0
---------------	--	---------	--------------



actuator			4 263 4929 0
----------	--	--	--------------



actuator J		(ajustable)	4 263 4930 0
------------	--	-------------	--------------



b-cam uncut			4 260 4843 0
-------------	--	--	--------------



setting key		for S-cam	4 109 4804 0
s-cam			4 260 4826 0



setting key		for R-cam	4 109 4805 0
r-cam			4 260 4827 0
rider	12°		4 264 4801 0
	6°		4 264 4802 0



AMP double plug		male-male	4 423 4868 0
AMP sleeve		female	4 423 4802 0

Headquarters

Johnson Electric Holdings Limited
Johnson Building, 6-22 Dai Shun St, Tai Po Industrial
Estate, New Territories
Hong Kong
T +852 2663 6688
F +852 2897 2054
e-mail: salessupport@johnsonelectric.com

Sales Offices

Asia

Shanghai, China
12/F, Hua Rong Tower
1289 Pudong Road South
Shanghai
200122 China
T +86 21 5882 2880
F +86 21 5882 2800

Shenzhen China
2/F, Block 10,
Furong Industrial Estate
Xinqiao, Shajing
Baoan District
Shenzhen 518125 China
T +86 755 2990 0886
F +86 755 2990 0890

Tokyo, Japan
Keihin Higashi-Oh! Bldg.
10/F, 2-13-8 Higashi-Oh!
Shinagawa-ku
Tokyo 140-0011 Japan
T +81 3 5762 1031
F +81 3 5762 1032

Seoul, Korea
6th Fl, Fine Bldg. 701-6
Banpo-Dong, Seocho-Ku
Seoul, Korea 137-808
T +82 2 518 8347/8341
F +82 2 518 8342

Singapore
1 Maritime Square #09-02,
Harbour Front Centre
Singapore 048623
T +65 6224 7570
F +65 6224 4538

Europe

Austria
Slovenia, Slovakia, Hungary, Czech Republic
Linzer Bundesstrasse 101
A-5023 **Salzburg**
T +43 662 88 4910
F +43 662 88 4910 11

France
10 Bd. Louise Michel
F-92230 **Gennevilliers**
T +33 1 46 88 07 70
F +33 1 46 88 07 99

78 Boulevard du 11 Novembre
69003 **Villeurbanne**
T +33 4 37 48 84 60
F +33 4 72 43 90 11

Germany
Sweden, Denmark, Norway, Finland
Weissenfeld 9
D-58553 **Halver**
T +49 2353 911 0
F +49 2353 911 230

Italy
Via Cadamosto 3
I-20094 **Corsico**, Milano
T +39 02 4869 21
F +39 02 4860 0692

Switzerland
Poland, Spain, Turkey, Portugal
Bahnhofstrasse 18
CH-3280 **Murten**
T +41 26 672 71 11
F +41 26 670 19 83

The Netherlands/Belgium
Hanzeweg 12c
NL-2803 MC **Gouda**
T +31 1825 43 154
F +31 1825 43 151

United Kingdom/Ireland
Dukesway
Team Valley Trading Estate
Gateshead
Tyne & Wear NE11 0UB
United Kingdom
T +44 191 401 61 00
F +44 191 401 63 05

Americas

Connecticut
10 Progress Drive
Shelton, CT 06484
T +1 203 447 5362
F +1 203 447 5383

Ohio
801 Scholz Drive
Vandalia, OH 45377
T +1 937 454 2345
F +1 937 898 8624

Ontario, Canada
70 Ironside Crescent Unit 7
Scarborough, **Ontario**
M1X 1G4 Canada
T +1 416 299 0852
F +1 416 299 6756

Sao Paulo, Brazil
Av. Papa Joao Paulo I - 1256
CEP 07170-350
Guarulhos **Sao Paulo**, Brazil
T (55) 11-643 156 00
F (55) 11-643 247 11

Johnson Electric Group

Johnson Building, 6-22 Dai Shun Street

Tai Po Industrial Estate, N.T., Hong Kong

Tel: (852) 2663 6688

Fax: (852) 2663 6110

Web Site: www.johnsonelectric.com